



FINELITE®
Better Lighting

Series 12 LED

Classic Shape • Affordable • Efficient



Project: Sport Ngini; Architect: Tanek; Location: Minneapolis, MN




Indirect/Direct Luminaires

A brand of **legrand®**

Series 12 Collection

A classic shape is transformed by new LED performance levels. Series 12 has three LED models – the affordable, high-efficacy 2-Engine, the flexible 3-Engine with separate uplight and downlight intensity controls, and a downlight optimized 4-Engine, as well as a fluorescent model. The efficacious and affordable 2E is the perfect choice for energy and budget conscious projects. 3E and 4E deliver enhanced flexibility with independently controlled uplight and downlight.

Flat Endcap (standard)

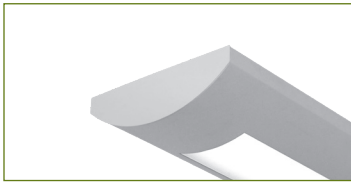

Curved Endcap (optional)

Finish

A durable, baked-on powder coat provides a long-lasting finish

Sensors

Optional daylight and occupancy sensors (daylight shown)

Driver Life

Designed to run cool, expected driver lifetime exceeds 100,000+ hours

Finelite Tailored Lighting

Tailored Output

Optimize lighting levels to accommodate architectural design elements and code requirements.

Tailored Control

Dim and tune the lighting to fit user preference. Apply sensors to respond to the environment.

Tailored Color


Tune white light and intensity to the preferences of the people in the space.

Declared 2.0


This product is enrolled in the International Living Future Institute (ILFI) Declare 2.0 Program and is third-party verified.



2-Engine




3-Engine




4-Engine

Mid-Power LEDs

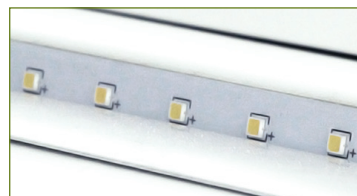


Mid-power LEDs run cool. Expected lifetime: L90 at 100,000+ hours, L70 at 200,000+ hours.

Complementary Wall Mounts



Surface Mount



Standoff Mount



Mounting Bracket



Series 12 LED 2E

Performance, Efficacy, and Affordability

The Series 12 LED 2-Engine (2E) has the highest efficacy of the collection is available with multiple optic and distribution ratios. Use the 2E configuration when superior optical performance is required for budget conscious projects.

Tailored Output

- Static White output options: Standard **(S)**, Boosted Standard **(B)**, and High **(H)**, and Very High **(V)**
- Tunable White output options: Boosted Standard **(B)** and Very High **(V)**
- Four distribution ratios: 10% up / 90% down (10U90D), 20% up / 80% down (20U80D), 30% up / 70% down (30U70D), and Total Direct Optic (TDO)

Tailored Color


- Static White light options at 3000K, 3500K and 4000K CCT
- Tunable White option for two-source tunable white light between 2700K and 6500K CCT
- 80+ and 90+ CRI options available

Tailored Control

- Dimming from 100% to 10% standard; 1% available
- Industry-leading pre-qualified drivers and controls options available
- Integrated or networked daylight and occupancy sensors options available
- Simplified white light color tuning design and installation with the FineTune™ controls system

2-Engine – Classroom

	H 3500K
	14' O.C.
Light Level General Mode (fc)	42.6
Average to Minimum	1.70:1
Energy Consumption (LPD) - General Mode	0.417 W/ft ²
Room Size	30' x 32'





Initial light levels represent typical average desktop surface.
 Ceiling Height: 10'0" / Mounting Height: 8'0" AFF / Room Reflectances: 80/50/20

Performance


2E Photometry – 4' Luminaire

Distribution: 74% Up / 26% Down
3500K Very High Output

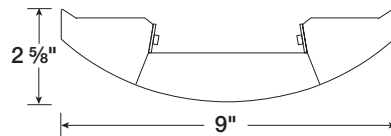

OPEN Up to 1196 lm/ft

Distribution Ratios
3500K Very High Output



10U90D Up to 791 lm/ft

20U80D Up to 833 lm/ft

30U70D Up to 864 lm/ft

TDO Up to 797 lm/ft

2E OPEN Lumen Output Per Foot (3500K)

	Total Lumens per foot	Wattage per foot	Efficacy Total (lm/W)
S*	490	3.7	134
B*	615	4.6	133
H*	930	7.2	130
V**	1196	9.3	128

* Family Correlation based on 4' luminaire 3500K Very High Output (V) test - 120V

** Correlation based on ITL LM79 Report 85161

2E Distribution Ratios, 3500K, 80+ CRI*

	Total Lumens	Efficacy (lm/W)
10U90D	1295 – 3163 (115% / 85%)	85 – 89
20U80D	1364 – 3331 (126% / 74%)	90 – 94
30U70D	1415 – 3457 (133% / 67%)	93 – 97
TDO	1305 – 3187 (10% / 100%)	86 – 90

* Family Correlation based on 4' luminaire 3500K Very High Output (V) test - 120V

Correlation based on ITL LM79 Reports: 87814, 87815, 87816, 87818

Notes:

Please refer to technical sheet for more information.

For Tunable White data please see Tunable White technical sheet.

Series 12 LED 3E

Separate Controls for Uplight and Downlight

The Series 12 LED 3-Engine (3E) is an architectural indirect/direct linear LED luminaire with single or dual circuit controls for the uplight and downlight. Users can manage intensity levels and switch between indirect and direct illumination to suit the task at hand.

Tailored Output

- Static White output options: Standard (**S**), Boosted Standard (**B**), High (**H**), and Very High (**V**)
- Tunable White output options: Boosted Standard (**B**) and Very High (**V**)

Tailored Color


- Static White light options at 3000K, 3500K and 4000K CCT
- Tunable White option for two-source tunable white light between 2700K and 6500K CCT
- 80+ and 90+ CRI options available

Tailored Control

- Independent control of the uplight and downlight with Static White, available
- Dimming from 100% to 10% standard; 1% available
- Industry-leading pre-qualified drivers and controls options available
- Integrated or networked daylight and occupancy sensors options available
- Simplified white light color tuning design and installation with the FineTune™ controls system

3-Engine – Private Office

	H - S 3500K
Light Level (fc)	38.0
Average to Minimum	1.46:1
Energy Consumption (LPD)	0.608 W/ft ²
Room Size	10' x 12'





Initial light levels at work plane.
Ceiling Height: 9'0" / Mounting Height: 7'6" AFF / Room Reflectances: 80/50/20

Performance

3E Photometry – 4' Luminaire

3500K Very High Output

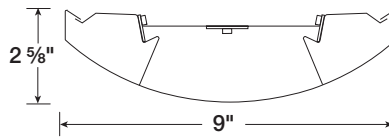

S12-LED-ID-DCO-4FT-3E-V-V-8-35-OPEN

Distribution: 71% Up / 29% Down

Efficacy: 124 lumens per watt

Total Luminaire Output: 7069 lumens (1767 lm/ft)

57.0 watts (14.3 w/ft)

CCT: 3500K

ITL LM79 Report 85163

3E OPEN Lumen Output Per Foot (3500K)				
	↑ S* / S* ↓	↑ B* / B* ↓	↑ H* / H* ↓	↑ V** / V** ↓
Uplight (lm/ft)	516	648	981	1261
Downlight (lm/ft)	207	261	394	506
Total Lumens	2894	3638	5498	7069
Wattage per foot	5.7	7.2	10.9	14.3
Efficacy Total (lm/W)	127	127	126	124

* Family Correlation based on 4' luminaire 3500K Very High Output (V) test – 120V

** Correlation based on ITL report: 85163

Notes:

Individually select uplight and downlight outputs in any combination.

Please refer to technical sheet for more information.

For Tunable White data please see Tunable White technical sheet.

Series 12 LED 4E

The Most Controls and Distribution Options

The Series 12 LED 4-Engine (4E) is an architectural indirect/direct linear LED luminaire with five distribution options. The 4-Engine is designed to maximize the downlight output with independent uplight and downlight intensity controls.

Tailored Output

- Static White output options: Standard **(S)**, Boosted Standard **(B)**, and High **(H)**
- Five distribution ratios: 10% up / 90% down (10U90D), 20% up / 80% down (20U80D), 30% up / 70% down (30U70D), 40% up / 60% down (40U60D), and Total Direct Optic (TDO)

Tailored Color

- Static White light options at 3000K, 3500K and 4000K CCT
- 80+ and 90+ CRI options available



Tailored Control

- Independent control of the uplight and downlight with Static White, available
- Dimming from 100% to 10%, standard; 1% available
- Industry-leading pre-qualified drivers and controls options available
- Integrated or networked daylight and occupancy sensors options available

Performance

4E Photometry – 4' Luminaire

Distribution Ratios
3500K High Output

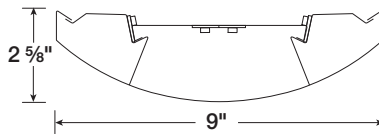

- 10U90D Up to 1250 lm/ft
- 20U80D Up to 1250 lm/ft
- 30U70D Up to 1250 lm/ft
- 40U60D Up to 1250 lm/ft
- TDO Up to 1250 lm/ft

4E Distribution Ratios, 3500K, 80+ CRI*		
	Total Lumens	Efficacy (lm/W)
10U90D	3000 – 5000 (↑10% / 90% ↓)	107 – 108
20U80D	3000 – 5000 (↑20% / 80% ↓)	109 – 110
30U70D	3000 – 5000 (↑30% / 70% ↓)	111 – 113
40U60D	3000 – 5000 (↑40% / 60% ↓)	113 – 116
TDO	3000 – 5000 (↑0% / 100% ↓)	105 – 108

* Family Correlation based on 4' luminaire 3500K Very High Output (**V**) test – 120V
Correlation based on ITL LM79 Report 85163

Notes:

Please refer to technical sheet for more information.
For Tunable White data please see Tunable White technical sheet.

САНІП НОУ


310



Ordering Guide

2E, 3E, and 4E LED

S12 LED-ID - DCO - 8' - 2E - S - 835 - 10U90D - 120V - SC - FA - EE - C1 - OBO - RLA

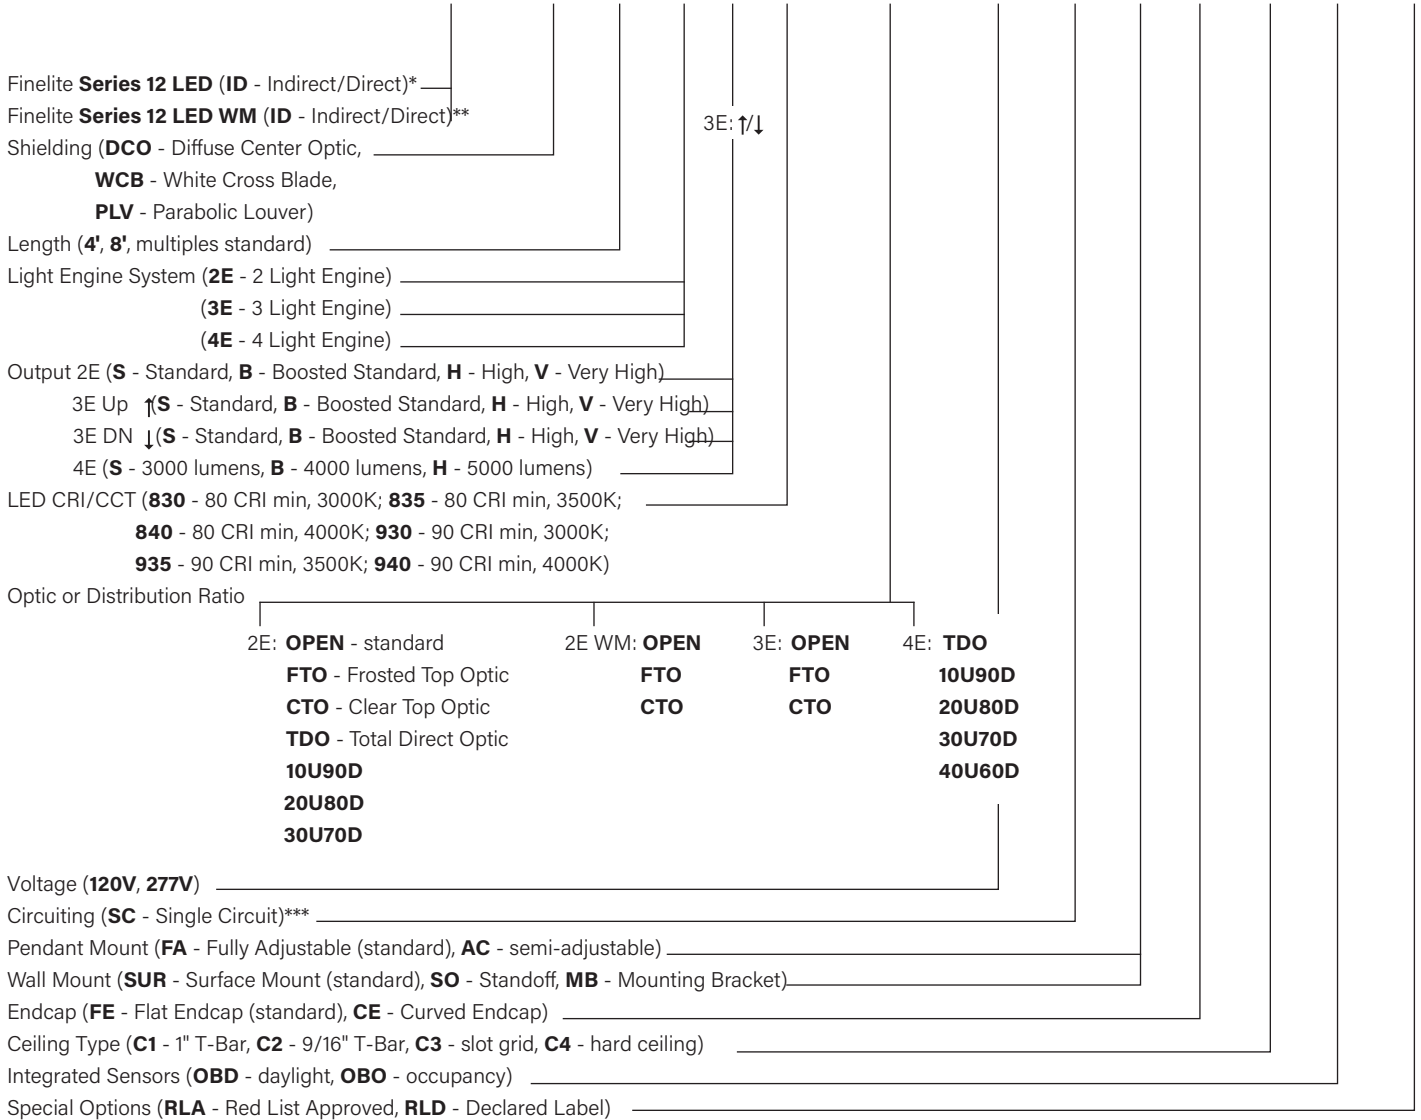

* Indirect luminaires available on 2E and 3E

** Available on 2E only

*** Contact factory for switching options

Note:

For Tunable White please see Tunable White technical sheet.

Tunable White & FineTune™


2700K



3500K



6500K

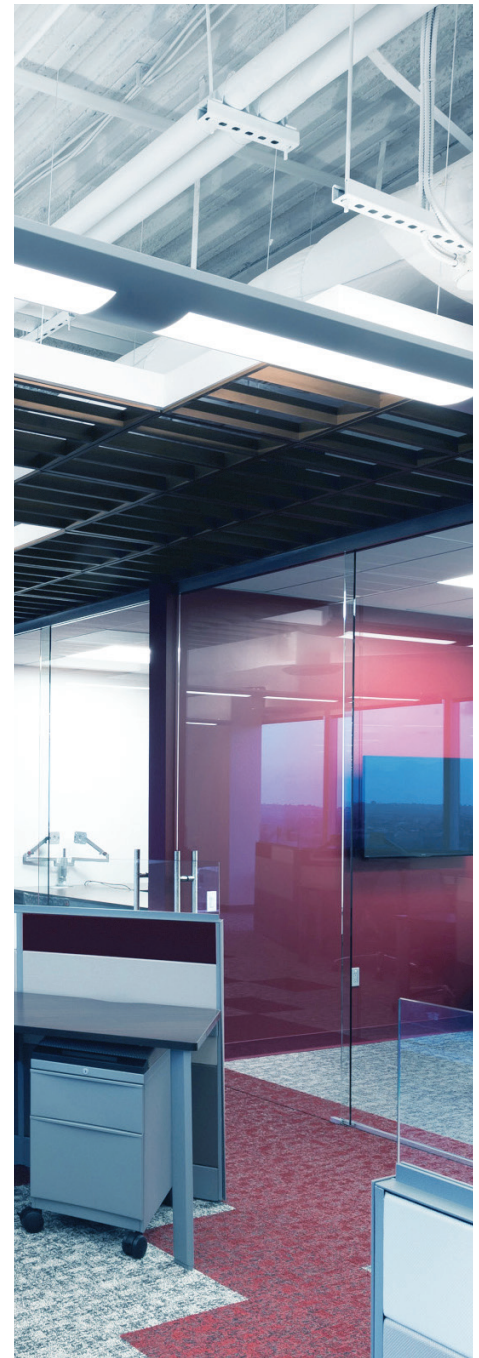



Tunable White Luminaires

Tunable White luminaires from Finelite help lighting designers tailor the color and intensity of the light in a space.

Comprehensive Product Selection

Available for 10-day shipping with all our most popular luminaire series with FineTune controls.

Preference

Choose the lighting tone for your palette of finishes from a warm 2700K CCT to a cool daylight 6500K CCT.

Two-Source Tuning

The two-chip design is simple, efficient, affordable, durable, and compatible with multiple control systems.



FineTune Controls System

FineTune is a simple, elegant, and robust white color tuning controls system.

Commissioning Simplified

FineTune arrives with all the DMX programming pre-configured for color-tuning, uniform dimming, daylight zones and sensor logic.

Everything's Included

All plug-and-play controllers and cables are supplied for tunable white light and dimming.

Control with Ease and Precision

Wall controller and mobile app make it easy to control color and intensity with visual displays of settings.



Series 12 LED

Classic Shape • Affordable • Efficient

Finelite LED Difference




10-year performance-based warranty



90% of initial light output at 100,000+ hours



Dimming standard



Replaceable LED light arrays

Finelite Commitment To You



10-working-day shipping on standard orders



Focus on sustainability