



E2 Indirect/Direct Configuration Mounting and Feed Guide

Top Glow



Flush



FINELITE®
Better Lighting

Customer: _____ Job: _____ PO: _____

SUSPENSION TYPE

Configuration Conductive Support Cable

To Power Supply Box

50"- Standard
89028



Retention Collar
(4 conductor)
15691

Custom _____
(Max 14')

Retention Collar
(5 conductor)
15694



Set Screw
15692




To Luminaire

CANOPY TYPE

Power and Non-Power Support


6" Square (Standard)
15721



4 Corner Filler
15781



6" Square (1'x8' Only)
15680



2 Slot Filler (1'x8' Only)
15787




CEILING TYPE

- 1" T-Bar** (C1)
- 9/16" T-Bar** (C2)
- Standard Screw Slot** (C3)
- Hard Ceiling** (C4)

SUSPENSION LENGTHS

Configurations



1'x2', 2'x2'

15" **18" Standard**

24" Custom


1'x4', 1'x8', 2'x3', 2'x4', 3'x3', 3'x4', 4'x4'

18" **24" Standard**


36" Custom

INTEGRATED SENSOR & EMERGENCY BACKUP BATTERY TEST BUTTON


Integrated Occupancy Sensor
15740




Integrated Occupancy Sensor & Emergency Backup Battery Test Button
15742




Emergency Backup Battery Test Button
15741




Dual Feed Integrated Occupancy Sensor
15681



Dual Feed Integrated Occupancy Sensor & Emergency Backup Battery Test Button
15683




Dual Feed Emergency Backup Battery Test Button
15682




E2 Indirect/Direct Configuration Mounting and Feed Guide

Top Glow




Flush




FINELITE[®]
Better Lighting

MOUNTING HARDWARE¹


- Caddy 512 HD T-Bar Support and Caddy Clip²**
94077



- Caddy/Erico T-Bar Supports²**
64218

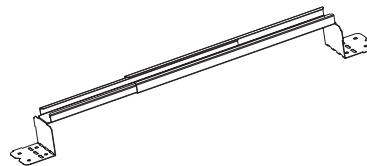


- Bar Hanger Channel²**
68250




ELECTRICAL BOX OPTIONS

- Low Profile T-Bar Power Supply Box (P01)**
89005



- T-Bar only
- Two driver maximum per box (illuminates up to 8')
- Includes easy leveling system from below ceiling
- Access drivers from above ceiling for simple maintenance
- (7) ½" feed knockouts available to connect building power
- Optional occupancy sensor located in canopy for a clean aesthetic


- Large Capacity Power Supply Box (P02)**
89008



- T-Bar or Drywall ceiling compatible*
- Four driver maximum per box (illuminates up to 16') or two drivers (illuminates up to 8') and one EM battery pack for egress (illuminates 4' only)
- Includes easy leveling system from below the ceiling
- Access to drivers from below ceiling to reduce maintenance time
- (4) ½" feed knockouts available to connect building power
- Optional Occupancy sensor located in canopy for a clean aesthetic


*Contact Factory for open ceiling applications.

- Retrofit Angled Power Supply Box (P03)**
89006




- T-Bar or Drywall ceiling compatible
- Two driver maximum per box (illuminates up to 8')
- Includes easy leveling system from below ceiling
- Access to drivers from below ceiling to reduce maintenance time
- (4) ½" feed knockouts available to connect building power
- Optional Occupancy sensor located in canopy for a clean aesthetic

- Support Bracket**
15736



- Splice Box (S01)**
89007




- T-Bar or Drywall ceiling compatible
- Includes easy leveling system from below ceiling

- Power Supply Box Electrical Cover**
15710





- Dual Feed Power Supply Box Electrical Cover**
15787



¹ E2-ID does not mount directly in alignment to T-Bar Grid / On-Grid.

² Contact factory for pricing

E2 Indirect/Direct Configuration Mounting and Feed Guide




FINELITE[®]
Better Lighting


EASY LEVELING SYSTEM ON ALL BOXES

E2-ID Configuration includes a patent pending leveling system for simple individual suspension adjustment for a consistent luminaire sightline.

2 Leveling Screws (1'x8' Only)



4 Leveling Screws (Standard)

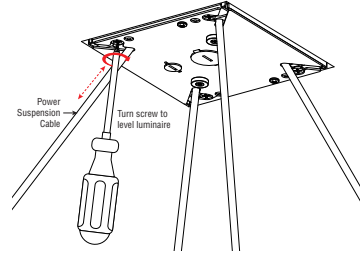

Watch Video




Scan this QR code with your mobile phone or tablet

ELECTRICAL SPECIFICATION (For more details, refer to www.finelite.com for the Electrical Box Specification Guide.)


**LOW PROFILE T-BAR
POWER SUPPLY BOXES (P01)**
(T-Bar Ceiling)

(Max 2 Drivers)
1'x2', 1'x8', 2'x2'




**RETROFIT
POWER SUPPLY BOXES (P03)**
(Drywall or T-Bar Ceiling)

(Max 2 Drivers)
1'x2', 2'x2'



**LARGE CAPACITY
POWER SUPPLY BOXES (P02)**
(Drywall or T-Bar Ceiling)

(Max 4 Drivers or 2 Drivers and 1 EM)
1'x2', 1'x4', 1'x8', 2'x2', 2'x3',
2'x4', 3'x3', 3'x4', 4'x4'



STANDARD CONFIGURATION DIMENSIONS (Drywall or T-Bar Ceiling)


To find actual dimensions for all configurations, add 1-1/8" to each section length.



1'X2'

1'X4'

1'X8'

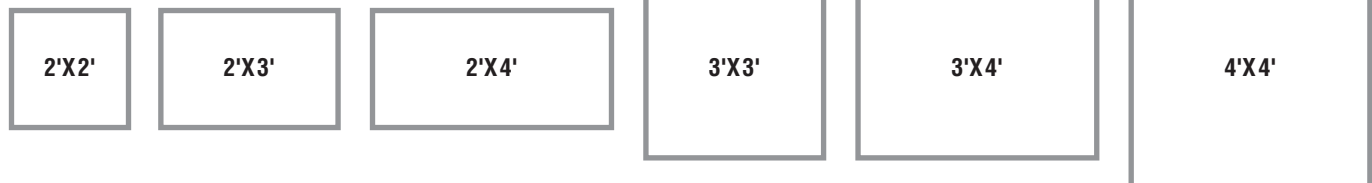

2'X2'

2'X3'

2'X4'

3'X3'

3'X4'

4'X4'

1'x8' is installed using two power supply boxes (one at each end of the luminaire).