



Date

Project

Type


Comments



**DESCRIPTION**


The Series 11 LED Micro Profile Cove is a high performance luminaire with an optional telescoping light engine to achieve a custom fit with continuous, uniform illumination. It is available in three color temperatures - 3000K, 3500K, and 4000K and comes in 2', 3', 4', and 8' lengths.

This Product is enrolled in the International Living Future Institute (ILFI) Declare 2.0 Program and is third-party verified with options achieving Red List Approved and Declared status.

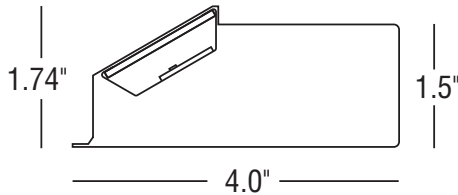

**DIMENSIONS AND LIGHT ENGINE**


The LED light engine uses mid-power LEDs positioned to provide excellent distribution and long life.

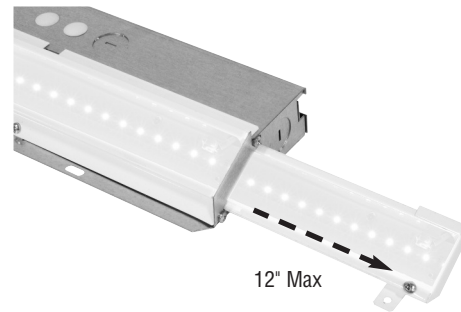

**TELESCOPING OPTION**

The Series 11 LED Micro Profile Cove has a telescoping light engine option, typically used at the end of a run, to provide up to 12 additional inches of luminaire. This ensures an accurate fit with uniform illumination. The telescoping option adds 1" to minimum length of luminaires.

**ORDERING GUIDE – Sample Number: S11-LED-MP - 32' - S - 835 - SC - 96W - 120V - TXL - RLA**

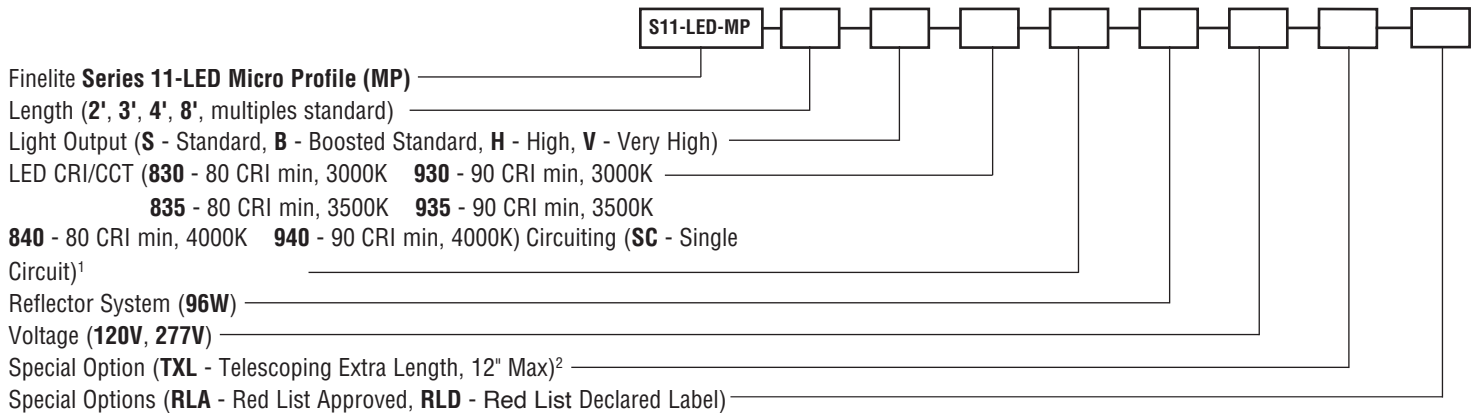

Finelite **Series 11-LED Micro Profile (MP)**  
 Length (2', 3', 4', 8', multiples standard)  
 Light Output (**S** - Standard, **B** - Boosted Standard, **H** - High, **V** - Very High)  
 LED CRI/CCT (**830** - 80 CRI min, 3000K **930** - 90 CRI min, 3000K  
**835** - 80 CRI min, 3500K **935** - 90 CRI min, 3500K  
**840** - 80 CRI min, 4000K **940** - 90 CRI min, 4000K) Circuiting (**SC** - Single Circuit)<sup>1</sup>  
 Reflector System (**96W**)  
 Voltage (**120V**, **277V**)  
 Special Option (**TXL** - Telescoping Extra Length, 12" Max)<sup>2</sup>  
 Special Options (**RLA** - Red List Approved, **RLD** - Red List Declared Label)

<sup>1</sup> Contact factory for switching options.

<sup>2</sup> Leave blank if telescoping section is not required. The last segment in runs with "TXL" will include the adjustable section, unless otherwise specified.

## PHOTOMETRY – 4' Luminaire

Very High Output


Efficacy: 120 lumens per watt

Total Luminaire Output: 2355 lumens (588.8 lumens/foot)  
19.6 watts (4.9 watts/foot)

Peak Candela Value: 925 @ 145°

CCT: 3500K

ITL LM79 Report: 85172



CANDELA DISTRIBUTION						
	0	45.0	90.0	135.0	180.0	Flux
90	318	155	0	0	0	
95	407	266	24	0	0	136
105	592	417	99	0	0	213
115	740	567	203	4	0	283
125	839	692	327	48	13	335
135	898	781	459	154	49	361
145	925	835	580	292	140	353
155	923	860	677	451	261	302
165	889	852	739	604	397	205
175	823	809	769	727	523	73
180	773	773	773	773	773	

Total Light Output, 3500K, 80 CRI (Lumens) - 4' Luminaire			
S*	B*	H*	V**
964	1212	1832	2356

Lumen Adjustment Factors - 80 CRI	
3000K	0.985
3500K	1.000
4000K	1.032

Light Output, 3500K, 80 CRI (Lumens Per Foot)			
S*	B*	H*	V**
241	303	458	589

Lumen Adjustment Factors - 90 CRI	
3000K	0.746
3500K	0.760
4000K	0.789

Power, 3500K, 80 CRI (Watts Per Foot)			
S*	B*	H*	V**
2.0	2.5	3.8	4.9

Apply a lumen adjustment factor to calculate lumens for the desired CCT and CRI.

Efficacy, 3500K, 80 CRI (Lumens Per Watt)			
S*	B*	H*	V**
120	120	121	120

### SAMPLE LUMEN ADJUSTMENT CALCULATION

High Output (H) 4000K, 90 CRI

Lumen Adjustment Factor = 0.789

$$\text{Total Light Output} = 1832 \text{ lm} \times 0.789 = 1445 \text{ lm}$$

$$\text{Total Light Output per Foot} = 458 \text{ lm/ft} \times 0.789 = 361.4 \text{ lm/ft}$$

$$\text{watts/foot} = 3.8 \text{ W/ft}$$


$$\text{Efficacy} = \frac{361.4 \frac{\text{lm}}{\text{ft}}}{3.8 \frac{\text{W}}{\text{ft}}} = 95 \text{ lm/W}$$

S - Standard Output, B - Boosted Standard Output, H - High Output, V - Very High Output


\* Family Correlation based on 4' luminaire 3500K Very High Output (V) test - 120V.

\*\* Based on ITL report: 85172


## MOUNTING



Mounting without removing reflector makes installation fast and easy. Mounts directly to architectural cove with two screws per 4' section.



Designed to fit into an architectural cove with a suggested cross section of 12" x 6" or larger.

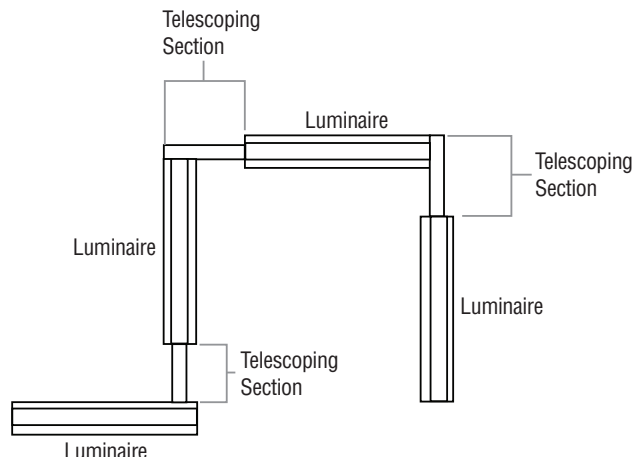

Example of how the runs would look with telescoping option.

## SPECIFICATIONS

**CONSTRUCTION:** Body is formed from 20-gauge sheet steel. All components are hard-tooled to a tolerance of +/-0.010".

**CORNER:** Optional corner harness, 1/2" diameter flex conduit, 14" long. Contact factory.

**REFLECTORS:** Die-formed 24-gauge cold-rolled steel reflectors finished in 96LG High Reflectance white powder coat paint.

**DIFFUSER:** Frosted virgin acrylic, 0.08" thick, provides a smooth distribution of light.

**LIGHT OUTPUT:** Four lumen packages available, Standard (S), Boosted Standard (B), High (H), and Very High (V). A separate chart summarizes lumen distribution and wattage. Light engines are replaceable.

**LUMEN MAINTENANCE:** 90% of initial light output (L90) at 100,000+ hours; 70% of initial light output (L70) at 200,000+ hours.

**DRIVER:** Replaceable 120V/277V Constant Current Reduction dimming driver standard. Can be wired dimming or non-dimming. 0-10V dimming controls with a range of 10%-100%. Dimming to 1% available; consult factory. Driver is fully accessible from below

the ceiling. Power Factor:  $\geq 0.90$ . Total Harmonic Distortion (THD):  $< 20\%$ . Expected driver lifetime: 100,000 hours.

**LUTRON DRIVER OPTIONS:** LUTES1 (Hi-lume 1% EcoSystem with Soft-On, Fade to Black dimming (LDE1 series)); LUTES5 (5-Series 5% EcoSystem (LDE5 Series)); Contact factory for availability of discontinued Lutron drivers, L3DA-3-wire and L3DA EcoSystem.

**ELECTRICAL:** Optional emergency to generator/inverter wiring, internal generator transfer switch, nightlight wiring, step-dimming driver, backup battery. Factory-choice low-profile backup battery available. Optional GLR/HLR fuse. 8' minimum luminaire length for low profile battery pack. Backup batteries deliver 2356 lumens. Half of a 4' section will be illuminated in emergency mode.

**MOUNTING:** Luminaire mounts directly to architectural cove.

**FEED:** A standard 18-gauge wire feed extends from the back of each driver segment.

**LENGTHS:** Standard 2', 3', 4', and 8' section lengths can be combined to make longer runs. The telescoping option adds 1" to the minimum length of the luminaire.

**LABELS:** Luminaire and electrical components are ETL-listed conforming to UL 1598 in the U.S.A. and CAN/CSA C22.2 No. 250.0 in Canada. In accordance with NEC Code 410.73 (G), this luminaire contains an internal driver disconnect. Damp Location. Finelite products use electronic components that are RoHS compliant, and the mechanical components of the luminaire have been verified to not knowingly contain any restricted substances listed per RoHS Directive 2011/65/EU. Finelite makes the specification process easy when putting healthier products on your projects. Simply add – RLA (Red List Approved) or – RLD (Red List Declared) to your part number.

**WEIGHT:** 1.5 lb/ft.

**WARRANTY:** 10-year performance-based warranty on all standard components. Optional accessories such as emergency battery packs are covered by their individual manufacturer warranties.