


Submitted by:		Date:
Type:	Project:	
Ordering Info:		

High Performance 4" Aperture (HP-4) Recessed

Recessed Flush Diffuser - Hard Ceiling Shown

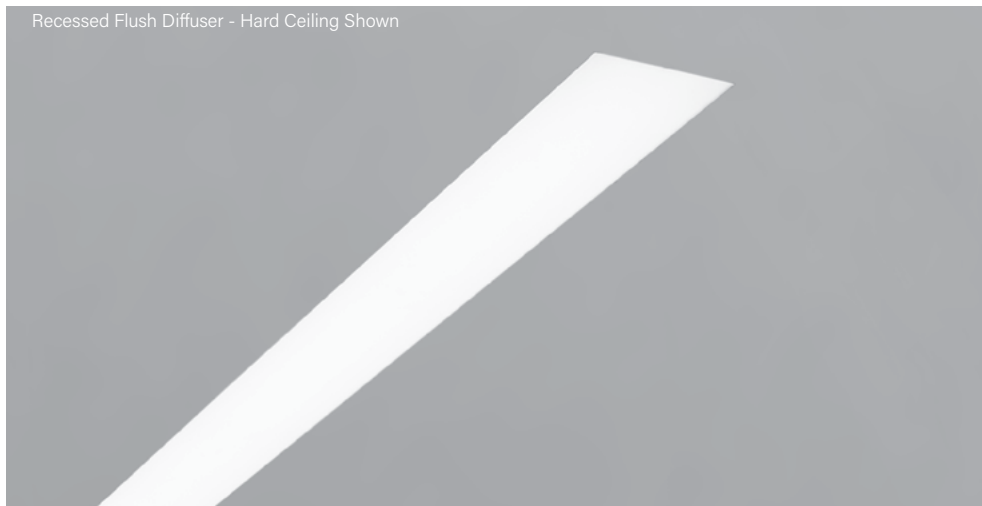


High Performance 4" Aperture is a patented, linear LED luminaire family. HP-4 delivers excellent performance using an advanced optical design and mid-power LEDs. Achieving 90% of initial light output at 100,000+ hours and backed by a 10-year performance-based warranty on all standard components.


This product is enrolled in the International Living Future Institute (ILFI) Declare 2.0 Program and is third-party verified with options achieving **Red List Approved** and **Red List Declared** status.

Note: see page 6 for all aesthetic options


CROSS SECTIONS

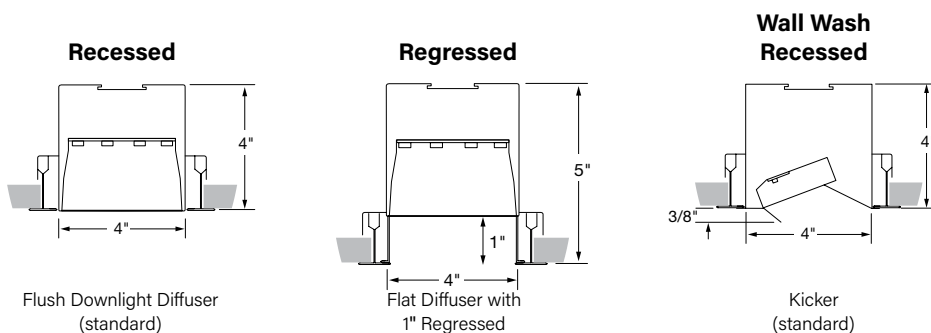

OPTIC OPTIONS

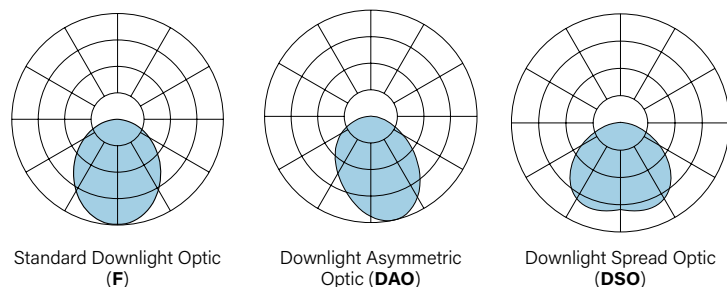

ALSO AVAILABLE IN

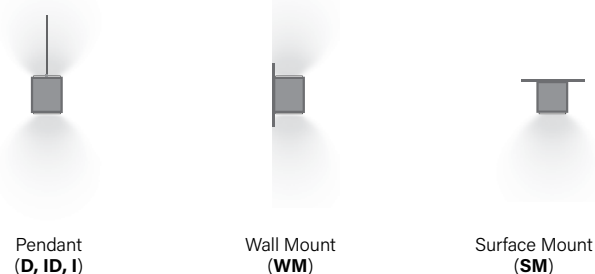

Submitted by:		Date:
Type:	Project:	
Ordering Info:		

High Performance 4" Aperture (HP-4) Recessed

Ordering Guide Example: HP - 4 - R - D - 36' - S - 835 - F - 96LG - 120 - SC - FC-10% - C1 - FE - SW - LGD18W - OBO - CP

BODY TYPE				OUTPUT and LED TYPE		
Platform	Series Name	Luminaire Type	Luminaire Distribution	Total Length of Run	Downlight Output (Flush)	LED CRI/CCT
HP - High Performance	4	R - Recessed R RG - Recessed Regressed (Wall Wash not available)	D - Direct WW-D - Wall Wash Direct	Minimum 2' section length. Increments accurate to 1/16" (±1/32"), standard. 12' maximum section length.	S - Standard (381 lm/ft) B - Boosted (479 lm/ft) H - High (725 lm/ft) V - Very High (932 lm/ft) TL - Tailored: _____ lm/ft*	830 - 80 CRI, 3000K 835 - 80 CRI, 3500K 840 - 80 CRI, 4000K 930 - 90 CRI, 3000K 935 - 90 CRI, 3500K 940 - 90 CRI, 4000K 8TW - 80 CRI, Tunable White 9TW - 90 CRI, Tunable White

Lumen provided above are for Flush lens only, see pg. 11 for WW lumens. * Specify Tailored lm/ft of outputs between Standard (S) and Very High (V). Consult factory for tailored lumen output outside of this range.

MECHANICAL/OPTICAL OPTIONS			ELECTRICAL OPTIONS		
Downlight	Reflector System	Voltage	Circuiting ⁴	Driver Selection	
F - Flush (standard) DL - 1" Drop Down Lens DSO - Downlight Spread Optic ^{2,8} DAO-L - Downlight Asymmetric Optic Left ^{2,8} DAO-R - Downlight Asymmetric Optic Right ^{2,8} FO - Fully Open for Wall Wash only K - Kicker for Wall Wash only ³ RG-D - Flat Diffuser with 1" Regress ¹ RG-WCB - White Cross Blade Baffle ¹ RG-LHE - Hollowed Ellipse Louver ¹ RG-LHC - Hex Louver ¹	96LG - 96 Low Gloss White SSA - Semi-Specular Aluminum for Wall Wash only	120 - 120 Voltage 277 - 277 Voltage 347 - 347 Voltage (OTi only)	SC - Single Circuit* * Battery, Night Light, and Emergency to Generator circuits are in addition to the normal luminaire circuit(s)	0-10V Driver Options FC-10% - 0-10V 10% (standard) FC-1% - 0-10V 1% OTI-10% - EldoLED OTi, 0-10V 10% ⁵ OTI-1% - EldoLED OTi, 0-10V 1% ⁵ ELD-10V-0% - EldoLED SOLOdrive, 0-10V 0.1% 10V-TW-10% - EldoLED OTi, 0-10V 10% (Tunable White) ⁵ DALI Driver Options FC-DALI-1% - DALI 1% DXL-DALI-1% - EldoLED Dexas, 1% ELD-DALI-0% - EldoLED SOLOdrive, 0.1% ELD-DALI-TW - EldoLED DUALdrive LightShape, 0.1% (Tunable White)	

ELECTRICAL OPTIONS		MOUNTING OPTIONS		OTHER OPTIONS			
Driver Selection		Ceiling Hardware Type		Emergency Style (Optional) <small>See page 5 Backup Battery table</small>			
DMX Driver Options ELD-DMX - EldoLED POWERdrive, 0.1% ELD-DMX-TW - EldoLED POWERdrive, 0.1% (Tunable White) Lutron Driver Options LUT-ES1 - Lutron, Ecosystem 1% LUT-TW - Lutron LD2 Dali-2 1% (Tunable White)		C1 - 15/16" T-Bar C1T - 15/16" Tegular C2 - 9/16" T-Bar C2T - 9/16" Tegular C3 - Screw Slot C3F - Flush Screw Slot SF - Spackle Flange VF - Visible Flange TZ6 - Tech Zone 6" <small>(C1, C2, C2T, C3, C3F)</small> See page 8 for flange information		FE - Flat Endcap (standard) Finish SW - Signal White (standard) FB - Finelite Black SA - Satin Aluminum ##### - RAL Color Code ⁷		LGD18W - Legrand 18W Brand Battery Back-up LGD10W - Legrand 10W Brand Battery Back-up EM/GEN - Emergency to Generator NL - Night Light BSL722 - Bodine Battery Back up BSL310LP - Bodine Battery Back up Low Profile GTD - Generator Transfer Device ALCR - Automatic Load Control Relay <small>See Backup Battery table on page 5 for fitment limitations</small>	

See Page 3 for additional driver options and details

OTHER OPTIONS		
Integrated Sensor (Optional)		Special Options (Optional)
OBO - Occupancy ⁸	AOCC-W - Lutron Athena Sensor ¹² (Device Color White)	CP - Chicago Plenum ¹⁴
OBD - Daylight ⁸	AOCC-B - Lutron Athena Sensor ¹² (Device Color Black)	FLX - Flex Whip
W601 - Wattstopper Sensor ¹⁰	ARF-W - Lutron Athena RF ¹² (Device Color White)	RLA - Red List Approved
OBE - Enlighted Sensor ⁹	ARF-B - Lutron Athena RF ¹² (Device Color Black)	RLD - Red List Declared
REE - Remote Enlighted ¹¹	VOCC - Lutron Vive Sensor ¹³	
CLM - Encelium RF	VRF - Lutron Vive RF ¹³	
SLM - Encelium Sensor		

¹ Recessed Regressed only
² Not available with Regressed or Curves
³ Kicker standard in Signal White. Customer Custom color kickers have a surcharge
⁴ Contact factory for switching options
⁵ Add DTO to gain "Dim to Off" functionality (FC-10% - DTO, FC-1% - DTO)
⁶ B & V outputs only
⁷ 20 business days lead time for color
⁸ Not available with Wall Wash
⁹ Enlighted components installed by Finelite, provided by others
¹⁰ LMFS-601 w/ 0-10V driver(s) and LMFI-111, up to 6 drivers may be connected.
 LMFS-601 w/ Dali driver, only 1 driver can be connected
¹¹ Enlighted for Wall Wash fixtures. Enlighted Control Unit & Sensor Cable installed for Remote mounting sensor.
¹² 0-10V Drivers - AOCC up to 10 drivers may be connected; ARF up to 40 driver may be connected. DALI Drivers - AOCC & ARF up to 4 drivers can be connected
¹³ Lutron Vive Inrgated Sensors require a DALI driver
¹⁴ Only available with C1, C2, and C3 mounting hardware with Finelite Gridbox



Submitted by:		Date:
Type:	Project:	
Ordering Info:		

High Performance 4" Aperture (HP-4) Recessed

SUPPLEMENTARY DRIVER PAGE

0-10V Driver Options

FC-10%	Factory Choice, 0-10V 10% Dimming (Linear)
FC-10%-DTO	Factory Choice, 0-10V 10% Dimming, Dim-to-Off (Linear)
FC-1%	Factory Choice, 0-10V 1% Dimming (Linear)
FC-1%-DTO	Factory Choice, 0-10V 1% Dimming, Dim-to-Off (Linear)
ELD-10V-0%	EldoLED SOLOdrive, 0-10V 0.1% Dimming (Linear)
ELD-10V-1%	EldoLED ECOdrive, 0-10V 1% Dimming (Linear)
10V-TW-10%	EldoLED OTi, 0-10V 10% Dimming, Tunable White (Linear)
10V-TW-10%-DTO	EldoLED OTi, 0-10V 10% Dimming, Dim-to-Off, Tunable White (Linear)
OTi-10%	EldoLED OTi, 0-10V 10% Dimming (Linear)
OTi-10%-DTO	EldoLED OTi, 0-10V 10% Dimming, Dim-to-Off (Linear)
OTi-1%	EldoLED OTi, 0-10V 1% Dimming (Linear)
OTi-1%-DTO	EldoLED OTi, 0-10V 1% Dimming, Dim-to-Off (Linear)

DALI Driver Options

FC-DALI-1%	Factory Choice, DALI 1% Dimming (Logarithmic)
ODXL-DALI-1%	EldoLED Dexal, DALI 1% Dimming (Logarithmic)
ELD-DALI-0%	EldoLED SOLOdrive, DALI 0.1% Dimming (Logarithmic)
ELD-DALI-1%	EldoLED ECOdrive, DALI 1% Dimming (Logarithmic)
ELD-DALI-TW	EldoLED DUALdrive Light Shape, DALI 0.1% Dimming, Tunable White (Logarithmic Dimming, Linear CCT Control)

DMX Driver Options

ELD-DMX	EldoLED POWERdrive, DMX 0.1% Dimming (8 Bit, 1CH) (Linear)
ELD-DMX-16	EldoLED POWERdrive, DMX 0.1% Dimming (16 Bit, 2CH) (Linear)
ELD-DMX-TW	EldoLED POWERdrive, DMX 0.1% Dimming, Tunable White (8 Bit, 2CH - CH1 Warm / CH2 Cool) (Linear)
ELD-DMX-TW16	EldoLED POWERdrive, DMX 0.1% Dimming, Tunable White (16 Bit, 4CH - CH1, 2 Warm / CH3, 4 Cool) (Linear)

Lutron Driver Options

LUT-ES1	Lutron, Ecosystem 1% Dimming
LUT-TW	Lutron LD2 Dali-2 1%, Tunable White

Submitted by:		Date:
Type:	Project:	
Ordering Info:		

High Performance 4" Aperture (HP-4) Recessed

SPECIFICATIONS

BODY TYPE

CONSTRUCTION: Precision-cut 6063-T6 extruded aluminum body. Internal joiner system, plug-together wiring, standard.

LENGTHS: Any length, 2' minimum, in increments down to 1/16" ($\pm 1/32"$). 12' maximum section length. Hollowed Ellipse Louver (**LHE**), Hex Louver (**LHC**), and White Cross Blade Baffle (**WCB**) are available in 1' increments.

MITERED CORNERS¹: Illuminated corners of greater than 60° and less than 180° in a single plane, available with Flush Diffuser, Bottom Glow Diffuser, Regressed Diffuser, White Cross Blade Baffle² or Wall Wash. Corners not available with Wall Wash (**WW-D**), Hollowed Ellipse Louver (**LHE**), Hex Louver (**LHC**) or 1" Drop Down Lens. Consult factory for tailored lighting options.

OUTPUT AND LED TYPE

LIGHT OUTPUT: Four lumen packages available, Standard (**S**), Boosted Standard (**B**), High (**H**), and Very High (**V**). For lengths 3' and greater, the uplight and downlight can be specified with different lumen packages and dual controls. For Tailored Outputs outside of range from Standard (**S**) to Very High (**V**), consult factory. Light engines are replaceable.

MECHANICAL/OPTICAL OPTIONS

DOWNLIGHT OPTION: 12' maximum diffuser length. Flush frost white snap-in diffuser standard, 73% transmissive, 99% diffusion. Internal secondary diffusers at corners ensure visually seamless, uniform, continuous illumination. Available with Flush (**F**), 1" Drop Down Lens (**DL**), White Cross Blade Baffle (**WCB**)^{3,4}, Ellipse Louver (**LHE**)³, Hex Louver (**LHC**)³, Downlight Spread Optic (**DSO**), Downlight Asymmetric Optic Left and Right (**DAO-L**, **DAO-R**), and Regressed downlight diffusers (**RG**)³. 1" Drop Down Lens made of acrylic. Available with a solid endcap or an endcap with a diffuser filler to continue the luminous aesthetic. Downlight Spread Optic (**DSO**) & Downlight Asymmetric Optic (**DAO**) are an extruded lenses with a subtle ribbed appearance providing desired improved optical performance. Consult factory for more tailored lumen outputs.

LUMEN MAINTENANCE: 90% of initial light output (L90) at 100,000+ hours; 70% of initial light output (L70) at 200,000+ hours.

REFLECTORS: Die-formed 20-gauge cold-rolled steel reflectors finished in 96LG High Reflectance white powder coat paint. The standard Semi-Specular Aluminum (**SSA**) Kicker (**K**) reflector delivers light high on the vertical surface. The Kicker reflector can be easily removed for open distribution (**FO**).

ELECTRICAL OPTIONS

STATIC WHITE FEED: Standard with one 18-gauge/5-conductor single-circuit feed wire controlling uplight and downlight together

(power and dimming). Specify dual feed wires for independent control of uplight and downlight. 14-gauge feed wire used when luminaire current exceeds 5 amps.

TUNABLE WHITE FEED: Standard with one 18-gauge/5-conductor single-circuit feed. 14-gauge feed used when luminaire current exceeds 5 amps. DMX and power feed at same location (standard). DMX feeds cannot be cut or spliced. DMX feeds should be ordered based on fixed lengths.

0-10V:

- One 18-gauge / 3-conductor power
- One 18-gauge / 4-conductor for dimming and controls

Dali:

- One 18-gauge / 5-conductor power and controls

DMX:

- One 18-gauge / 3-conductor power
- One DMX feed

STATIC WHITE DRIVER: Replaceable 120V, 277V, and 347V constant current reduction dimming driver standard. Can be wired dimming or non-dimming. 0-10V dimming controls with a range of 10%- 100% standard. Dimming to 1% available. Separate dimming for uplight and downlight available. Driver is fully accessible from below the ceiling.

- **Power Factor:** ≥ 0.9

- **Total Harmonic Distortion (THD):** <20%

- **Expected driver lifetime:** 100,000 hours

LUTRON DRIVER OPTIONS:

LUT-ES1 - Hi-lume 1% EcoSystem with Soft-On, Fade-to- Black dimming (LDE1 series)

TUNABLE WHITE DRIVER: Replaceable LED driver. Driver is accessible from below the ceiling. 120V and 277V.

- **Power factor:** ≥ 0.90

- **Total Harmonic Distortion (THD):** <20%

- **Dimming Range:** 100%-10%

- **Expected driver lifetime:** 100,000 hours

LUTRON TUNABLE WHITE DRIVER OPTION:

LUT-TW - Lutron LD2 Dali-2 1% Tunable White.

MOUNTING OPTIONS

HANGING HARDWARE:

- **Recessed T-Bar:** Standard bracket design works with most lay-in ceiling types. Brackets secure luminaire to the ceiling grid from above. Tie-in T-Bar brackets connect the luminaire to the T-Bar for securing to structure. Consult local codes for tie-wire recommendations.

- **Recessed Spackle Flange:** Drywall surfaces (walls or ceilings): 1/4" - 20 stud and nut (provided by others). Mounted with three equidistant suspension points.

¹ Not available with Wall Wash

² White Cross Blade (WCB) baffles not available with custom angles. Available in 90 degrees only

³ Recessed-Regressed only

⁴ White Cross Blade Baffle (WCB) currently not advisable for drywall

Submitted by:		Date:
Type:	Project:	
Ordering Info:		

High Performance 4" Aperture (HP-4) Recessed

SPECIFICATIONS

TUNABLE WHITE DMX HANGING HARDWARE: For grid ceiling applications the dual GridBox™ mounting is supplied (standard). For hard ceiling applications the ceiling mounting box is supplied (standard). DMX feeds cannot be cut or spliced. DMX feeds should be ordered based on fixed lengths. Available DMX pendant feed lengths are 5', 12', and 30' (5' standard).

TUNABLE WHITE DMX INTERCONNECTION CABLES: Luminaires are prewired with plug-and-play interconnected cables to support easy plug-together joining of fixture runs. DMX to RJ45 adapters and an RJ45 terminator for every 32 DMX drivers are included.

OTHER OPTIONS

ENDCAPS: Flat endcaps (**FE**) at each end of run add 1/16" to each end of luminaire. Drop Down Lens Illuminated Endcap (**DE**) includes diffuse element to continue luminance of drop lens.

EMERGENCY STYLE: Optional emergency to generator/inverter wiring, internal generator transfer switch, nightlight wiring, step-dimming driver, backup battery.

Backup Battery		
	Legrand 18W	Legrand 10W/ Bodine BSL310LP
HP4-R-D		
Min. Housing Length	8'	4'
EM Lumen Output	1854	1102
EM Section Illum.	2'	2' or 4'
HP4-R-WW-D		
Min. Housing Length	8'*	4'*
EM Lumen Output	2000	1189
EM Section Illum.	4'	4'

* Minimum fixture housing length for battery pack approved without sensor.
The lumens are based on 835. For other CCT/CRI, refer to the Lumen Adjustment Factor table on page 11.

Bodine GTD and Legrand ALCR Min. Length	
Configuration	Min Length
Generator	D-2'
Generator + OCC	D-2'
Daylight	D-2'
Generator + Daylight	D-2'

TUNABLE WHITE ELECTRICAL OPTIONS⁶:

TW Driver Options

- **0-10V:** EM/GEN, GTD or Battery Back Up
- **DMX:** Battery Back Up
- **DALI:** EM/GEN, GTD or Battery Back Up
- **LUTRON:** EM/GEN, GTD or Battery Back Up

INTEGRATED SENSORS: Integrated PIR (Passive Infrared) Occupancy (**OBO**) or Daylight Sensors (**OBD**) available with Flush and Bottom Glow downlight diffusers. PIR sensors not recommended for stairwell applications. Refer to Occupancy Sensor & Daylight Sensor tech sheet and the Embedded Intelligence landing page for more information and additional sensor options.

FINISHES: Finelite Signal White (**SW**) powder coat, Finelite Black (RAL 9005) with semi gloss fine texture (**FB**), and Satin Aluminum (**SA**) are standard. Optional Adder: 179 RAL colors⁷ are available.

LABELS: Luminaire and electrical components are ETL-listed conforming to UL 1598 in the U.S.A. and CAN/CSA C22.2 No. 250.0 in Canada. In accordance with NEC Code 410.130 (G), this luminaire contains an internal driver disconnect. UL 924 and UL 2108 - PoE options available on request. These fixtures are rated for Damp Location. IC Rated. Finelite products use electronic components that are RoHS compliant, and the mechanical components of the luminaire have been verified to not knowingly contain any restricted substances listed per RoHS Directive 2015/863. Consult factory for tailored lighting options. Finelite makes the specification process easy when putting healthier products on your projects. Simply add - **RLA** (Red List Approved) or - **RLD** (Red List Declared) to your part number.

WEIGHT⁸: R - 2.8 lb/ft; WW-R - 2.9 lb/ft

WARRANTY: 10-year performance-based warranty on all standard components. Optional accessories such as emergency battery packs are covered by their individual manufacturer warranties.

⁶ Consult Finelite for Generator Transfer Device and Battery Backup fit


⁷ 20 business days lead time for color

⁸ Excludes Battery Backup and Generator Transfer Device weight


Submitted by:		Date:
Type:	Project:	
Ordering Info:		

High Performance 4" Aperture (HP-4) Recessed


AESTHETIC OPTIONS




Flush Diffuser (**F**)




1" Drop Down Lens (**DL**)



Flat Diffuser with 1" Regressed (**RG-D**)

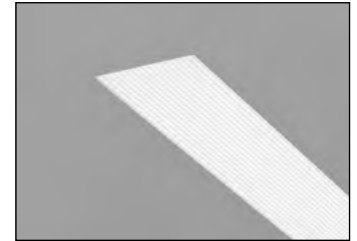


Downlight Spread Optic (**DSO**)
Externally flush




Downlight Asymmetric Optic (**DAO**)
Externally flush




White Cross Blade Baffle¹ (**RG-WCB**)



Hex Louver¹ (**RG-LHC**)

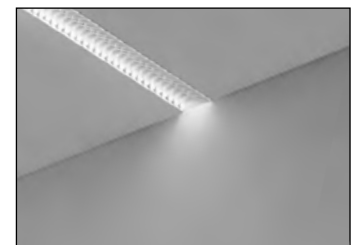

Hollowed Ellipse Louver¹ (**RG-LHE**)



Kicker (**K**) - Wall Wash only

¹ Regressed only



Submitted by:		Date:
Type:	Project:	
Ordering Info:		

High Performance 4" Aperture (HP-4) Recessed



DOWNLIGHT ASYMMETRIC OPTIONS

The diagrams below show a linear run from power feed to ender. Specifying DAO-L distributes light to the left or DAO-R distributes light to the right. For proper orientation: view luminaire from starter end when specifying the direction of the Downlight Asymmetric optic.

Downlight Asymmetric Optic Left (DAO-L)

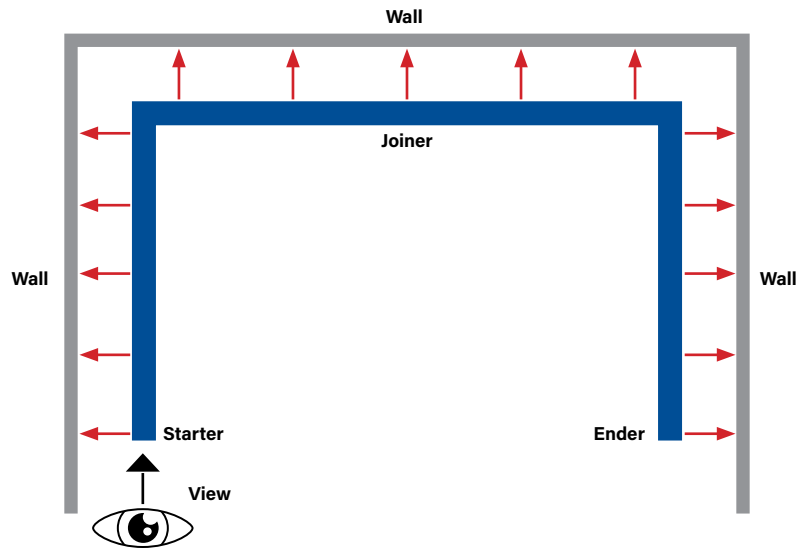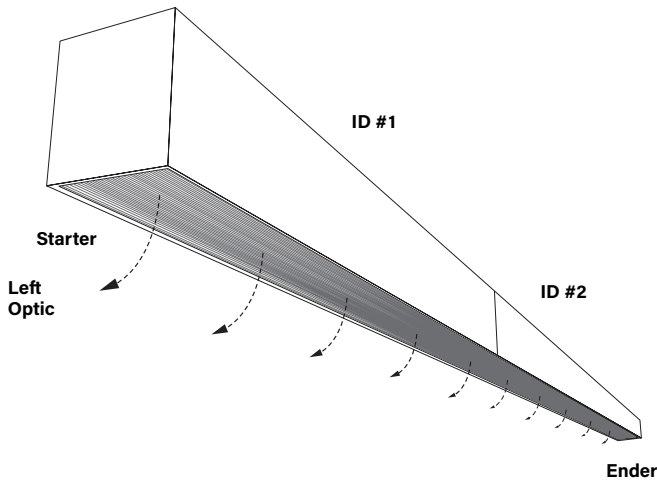

Downlight Asymmetric Optic Right (DAO-R)

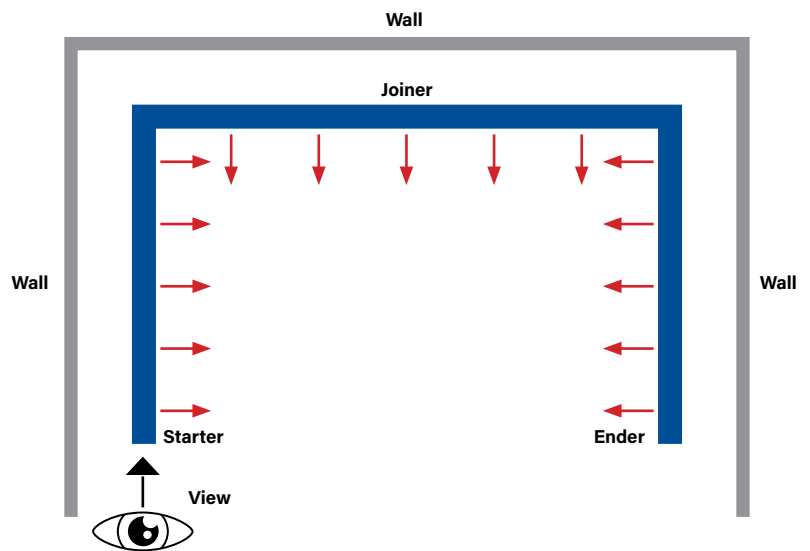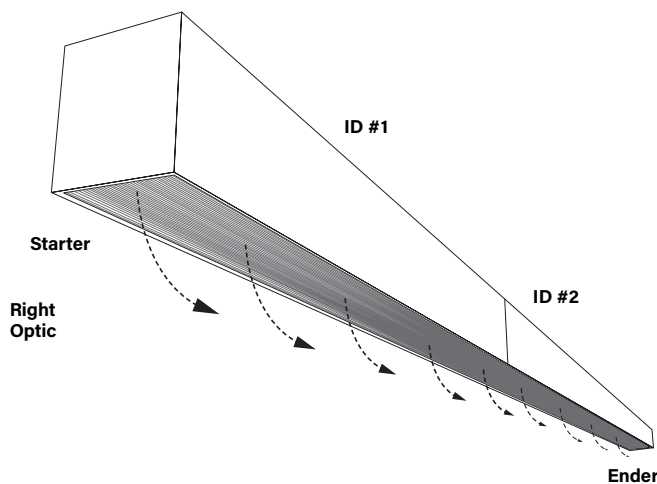

PREINSTALLED LABEL




For DAO, Preinstalled label on diffuser shows direction of light. Remove after installation.

Submitted by:		Date:
Type:	Project:	
Ordering Info:		


High Performance 4" Aperture (HP-4) Recessed

HARD CEILING MOUNTING OPTIONS



Threaded Rod Option



Screw Mount Option




Mounting Location for Securing to Structure



Two mounting options: threaded rod and screw mounting options. Mounting locations are located on each end of the luminaire. Mounting location is 6" away from each end of luminaire.


T-BAR INSTALLATION

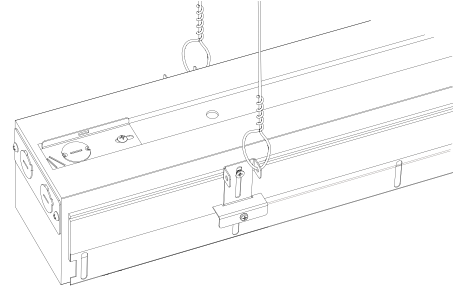


HP-4 R for T-Bar installations comes standard with a splice plate at the end of the luminaire. Mounting brackets (supplied) secure the luminaire to T-Bar and provide support to structure location. All even foot length (2, 4, 6, ...) luminaire runs are reduced in length by an appropriate amount to fit within typical 2x2 and 2x4 T-Bar grid systems. For uncommon T-Bar systems please consult factory.

GRID LENGTH DETAIL - 4' EXAMPLE


15/16" T-Bar

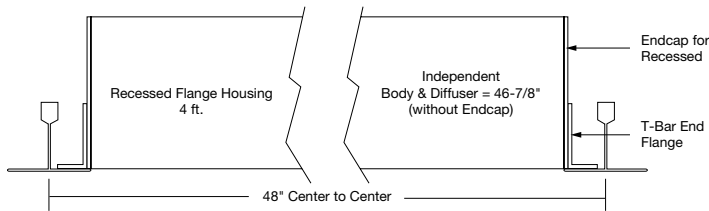

9/16" T-Bar

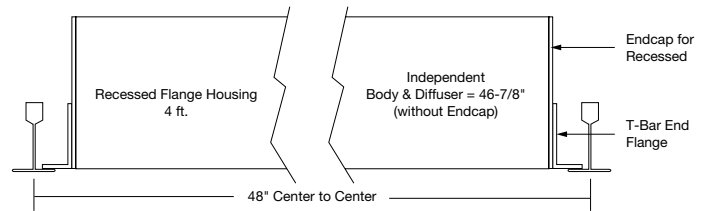


9/16" Screw Slot

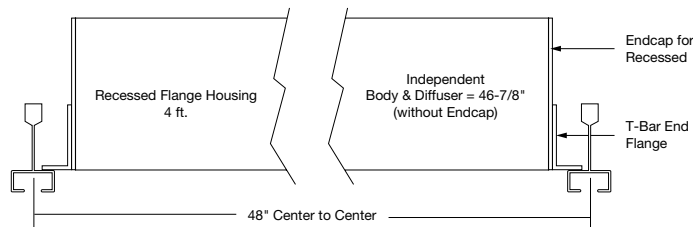


HARD CEILING LENGTH DETAIL - 4' EXAMPLE

Spackle Flange

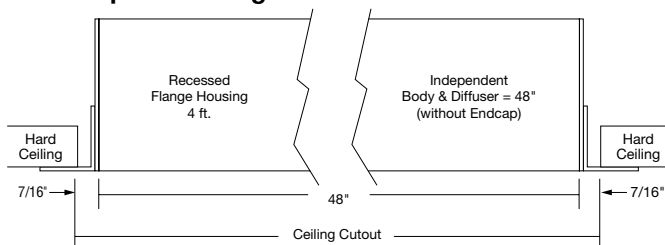

Visible Flange

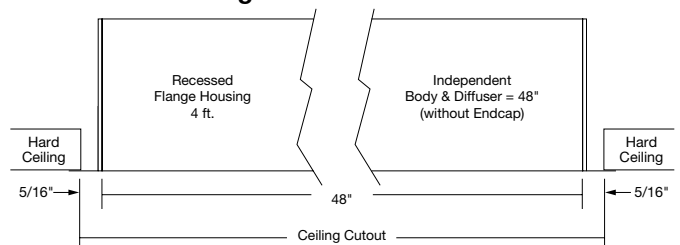


Submitted by:		Date:
Type:	Project:	
Ordering Info:		


High Performance 4" Aperture (HP-4) Recessed

RECESSED MOUNTING TYPES - T-BAR


Rough-In Dimensions




15/16" T-Bar (C1)




9/16" T-Bar (C2)




Standard Screw Slot (C3)




Flush Screw Slot (C3F)




15/16" Tegular (C1T)




9/16" Tegular (C2T)

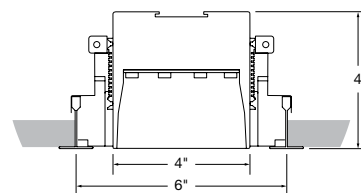


Tech Zone 6" (TZ6)
15/16" T-Bar (C1)

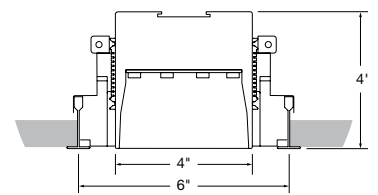


Tech Zone 6" (TZ6)
9/16" T-Bar (C2)

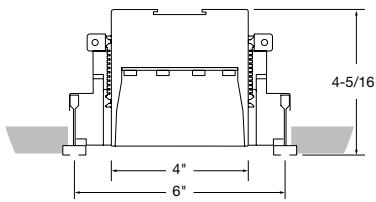

Tech Zone 6" (TZ6)
Standard Screw Slot (C3)

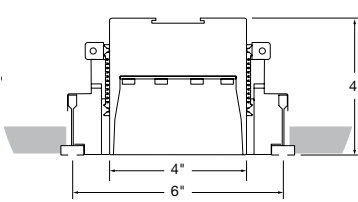


Tech Zone 6" (TZ6)
Flush Screw Slot (C3F)

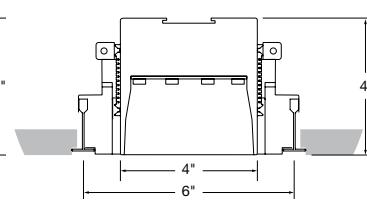


Tech Zone 6" (TZ6)
9/16" Tegular (C2T)

RECESSED MOUNTING TYPES - CUTOUT DIMENSIONS

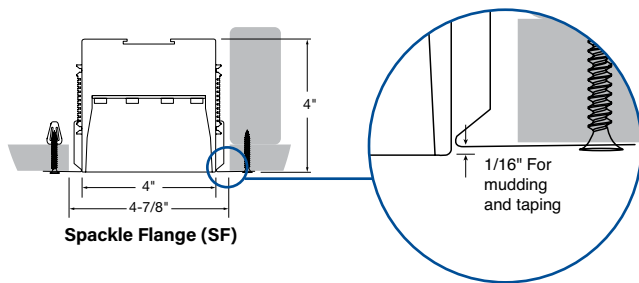


Spackle Flange (SF)

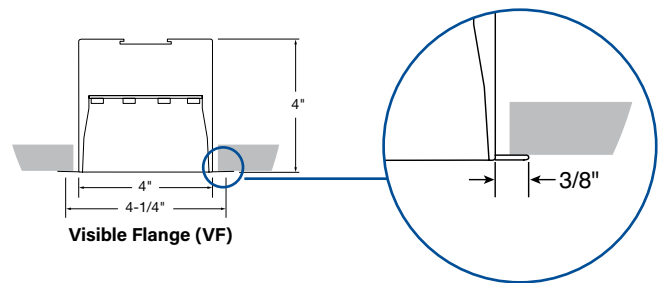

Visible Flange (VF)

HOUSING


Version 1 (V1)



Ceiling Option VF

No modification on flange


Version 2 (V2)



Ceiling Options
C1T, C2T, C3F, SF, TZ6

Flange can be modified individually on each side of the housing

Version 3 (V3)



Ceiling Options
C1, C2, C3

No modification on flange


Note: +/- 1/16"

Submitted by:		Date:
Type:	Project:	
Ordering Info:		


High Performance 4" Aperture (HP-4) Recessed

REGRESSED MOUNTING TYPES - T-BAR


Rough-In Dimensions




15/16" T-Bar (C1)




9/16" T-Bar (C2)




Standard Screw Slot (C3)




Flush Screw Slot (C3F)




15/16" Tegular (C1T)




9/16" Tegular (C2T)




Tech Zone 6" (TZ6)
15/16" T-Bar (C1)




Tech Zone 6" (TZ6)
9/16" T-Bar (C2)



Tech Zone 6" (TZ6)
Standard Screw Slot (C3)




Tech Zone 6" (TZ6)
Flush Screw Slot (C3F)




Tech Zone 6" (TZ6)
9/16" Tegular (C2T)

REGRESSED MOUNTING TYPES - CUTOUT DIMENSIONS

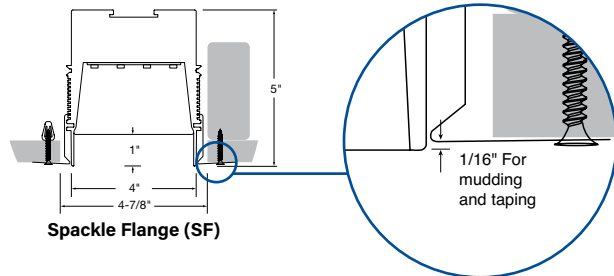

Spackle Flange (SF)

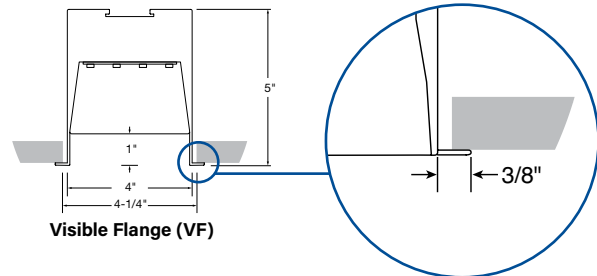


Visible Flange (VF)

Regressed Lens: Regressed lens version is 5" tall with a lens that is regressed 1" from ceiling line.

HOUSING


Version 1 (V1)



Ceiling Option VF

No modification on flange


Version 2 (V2)



Ceiling Options

C1T, C2T, C3F, SF, TZ6
Flange can be modify individually on each side of the housing

Version 3 (V3)



Ceiling Options

C1, C2, C3
No modification on flange

Note: +/- 1/16"

Submitted by:		Date:
Type:	Project:	
Ordering Info:		

High Performance 4" Aperture (HP-4) Recessed

Recessed Photometry - 4' Luminaire 3500K

HP4-R-D-4'-V-835

Downlight: Flush Diffuser


Efficacy: 101 lm/W

Total luminaire output: 3726 lumens (932 lm/ft)
37 watts (9.3 W/ft)

Peak Candela Value: 1442 @ 0°

CRI: 80 / CCT: 3500K

ITL LM79 Report 85128



HP4-R-D-4'-V-835-DAO

Downlight: Downlight Asymmetric Optic


Efficacy: 109 lm/W

Total luminaire output: 3884 lumens (971 lm/ft)
35.6 watts (8.9 W/ft)

Peak Candela Value: 1645 @ 12.5°

CRI: 80 / CCT: 3500K

ITL LM79 Report 94331



Total Light Output, 3500K, 80 CRI (Lumens) - 4' Luminaire

S ¹	B ¹	H ¹	V ²
1525	1917	2898	3726

Total Light Output, 3500K, 80 CRI (Lumens) - 4' Luminaire

S ¹	B ¹	H ¹	V ²
1590	1999	3021	3884

Light Output, 3500K, 80 CRI (Lumens Per Foot)

S ¹	B ¹	H ¹	V ²
381	479	725	932

Light Output, 3500K, 80 CRI (Lumens Per Foot)

S ¹	B ¹	H ¹	V ²
397	500	755	971

Power, 3500K (Watts Per Foot)

S ¹	B ¹	H ¹	V ²
3.6	4.6	7.1	9.3

Power, 3500K (Watts Per Foot)

S ¹	B ¹	H ¹	V ²
3.5	4.4	6.8	8.9

Efficacy, 3500K, 80 CRI (Lumens Per Watt)

S ¹	B ¹	H ¹	V ²
105	104	102	101

Efficacy, 3500K, 80 CRI (Lumens Per Watt)

S ¹	B ¹	H ¹	V ²
114	113	111	109

S - Standard Output, B - Boosted Standard Output, H - High Output, V - Very High Output

¹ Family Correlation based on 4' luminaire 3500K Very High Output (V) test - 120V.

² Based on ITL reports: 85128

S - Standard Output, B - Boosted Standard Output, H - High Output, V - Very High Output

¹ Family Correlation based on 4' luminaire 3500K Very High Output (V) test - 120V.

² Based on ITL reports: 94331

Wattage is Real Power. If you would like additional details to calculate Apparent Power, please contact your local Finelite representative.

Sample Lumen Adjustment Calculation

Lumen Adjustment Factors 80 CRI	
3000K	0.985
3500K	1.000
4000K	1.032

Lumen Adjustment Factors 90 CRI	
3000K	0.746
3500K	0.760
4000K	0.789

High Output (H), 4000K, 90 CRI
Lumen Adjustment Factor: 0.789

Total Light Output: 3021 lm x 0.789 = 2384 lm

Total Light Output per Foot: 755 lm/ft x 0.789 = 596 lm/ft.
watts/foot: 6.8 W/ft.

$$\text{Efficacy} = \frac{596 \frac{\text{lm}}{\text{ft.}}}{6.8 \frac{\text{W}}{\text{ft.}}} = 88 \text{ lm/W}$$

Submitted by:		Date:
Type:	Project:	
Ordering Info:		

High Performance 4" Aperture (HP-4) Recessed

Recessed Photometry - 4' Luminaire 3500K

HP4-R-WW-D-K-4'-V-835

Downlight: With Kicker


Efficacy: 92 lm/W

Total luminaire output: 1816 lumens (454 lm/ft)
21.5 watts (5.4 W/ft)

Peak Candela Value: 1072 @ 35°

CRI: 80 / CCT: 3500K

ITL LM79 Report 85130



Total Light Output, 3500K, 80 CRI (Lumens) - 4' Luminaire

S ¹	B ¹	H ¹	V ²
743	935	1412	1816

Light Output, 3500K, 80 CRI (Lumens Per Foot)

S ¹	B ¹	H ¹	V ²
186	234	353	454

Power, 3500K (Watts Per Foot)

S ¹	B ¹	H ¹	V ²
2.0	2.5	3.8	5.0

Efficacy, 3500K, 80 CRI (Lumens Per Watt)

S ¹	B ¹	H ¹	V ²
91	92	92	92

S - Standard Output, B - Boosted Standard Output, H - High Output, V - Very High Output

¹ Family Correlation based on 4' luminaire 3500K Very High Output (V) test - 120V.

² Based on ITL reports: 85130

Wattage is Real Power. If you would like additional details to calculate Apparent Power, please contact your local Finelite representative.

Sample Lumen Adjustment Calculation

Lumen Adjustment Factors 80 CRI	
3000K	0.985
3500K	1.000
4000K	1.032

Lumen Adjustment Factors 90 CRI	
3000K	0.746
3500K	0.760
4000K	0.789

High Output (H), 4000K, 90 CRI
Lumen Adjustment Factor: 0.789
Total Light Output: 1412 lm x 0.789 = 1114 lm
Total Light Output per Foot: 353 lm/ft x 0.789 = 279 lm/ft.
watts/foot: 3.8 W/ft.

$$\text{Efficacy} = \frac{279 \frac{\text{lm}}{\text{ft.}}}{3.8 \frac{\text{W}}{\text{ft.}}} = 73 \text{ lm/W}$$

Submitted by:		Date:
Type:	Project:	
Ordering Info:		

High Performance 4" Aperture (HP-4) Recessed


WALL WASH RECESSED - SETBACK INFO AND APPLICATION DATA

HP4-R-WW-D-K-4'-V-835


Downlight: With Kicker

Total luminaire output: 1450 lumens (363 lm/ft)
19.1 watts (4.8 W/ft)

CRI: 80 / CCT: 3500K

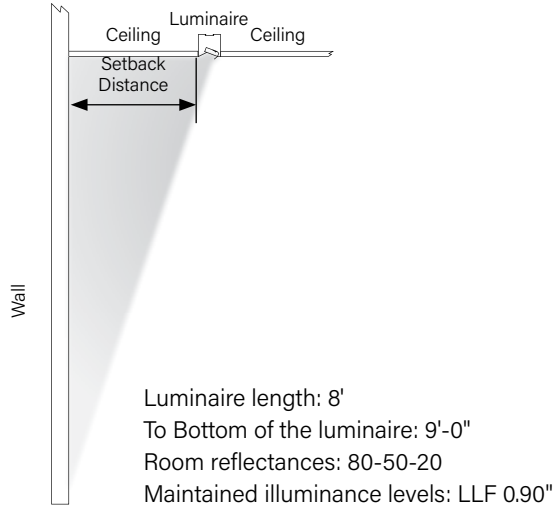

Setback Distance - 2'

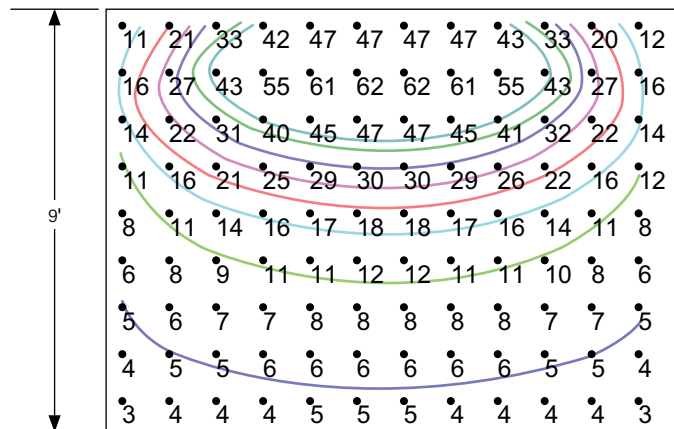


DOWNLIGHT ASYMMETRIC OPTIC - SETBACK INFO AND APPLICATION DATA

HP4-R-D-4ft-V-835-DAO


Downlight: DAO

Total luminaire output: 3884 lumens (971 lm/ft)
35.6 watts (8.9 W/ft)

CRI: 80 / CCT: 3500K

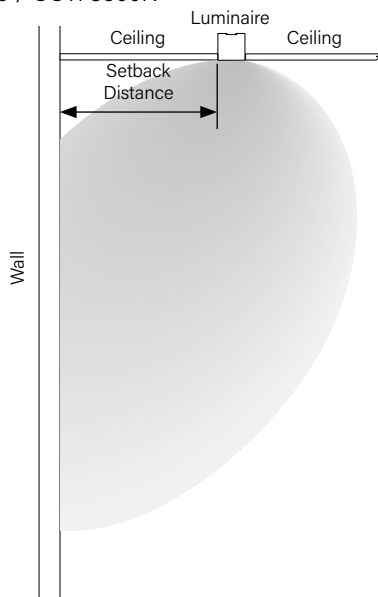

Setback Distance - 2'

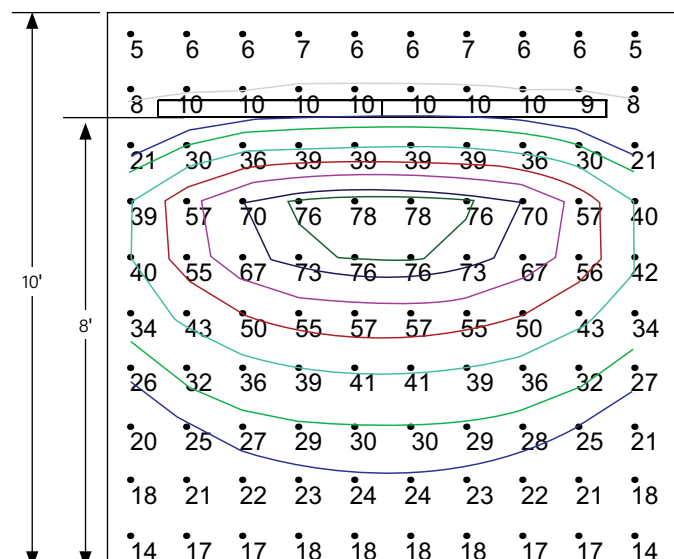

Submitted by:		Date:
Type:	Project:	
Ordering Info:		

0-10V Tunable White

Finelite's award-winning, contractor friendly Tunable White luminaires are available at low cost, with powerful and simple 0-10V tuning and intensity controls.

TUNABLE WHITE FEATURES

- CCT range: 2700K - 6500K
- Dimming Range: 100% to 10%
- CRI Options: 80 CRI or 90 CRI

LUMINAIRE FAMILY MODIFICATIONS/RESTRICTIONS

Recessed Direct	Section Lengths											
	2'	3'	4'	5'	6'	7'	8'	9'	10'	11'	12'	
Output S,B,H,V Single Circuit	Rows can be comprised of 2'-12' sections. Tailored lengths available.											
Integral Battery Backup (BSL310LP)							✓		✓		✓	


PHOTOMETRY

Apply a power adjustment factor to calculate wattage usage

POWER	CONVERSION FACTOR
	1.1X

(Example: a 50 watt luminaire in static white would draw 55 watts using 0-10V Tunable White)

WIRING DIAGRAM - DIMMABLE TO 10%

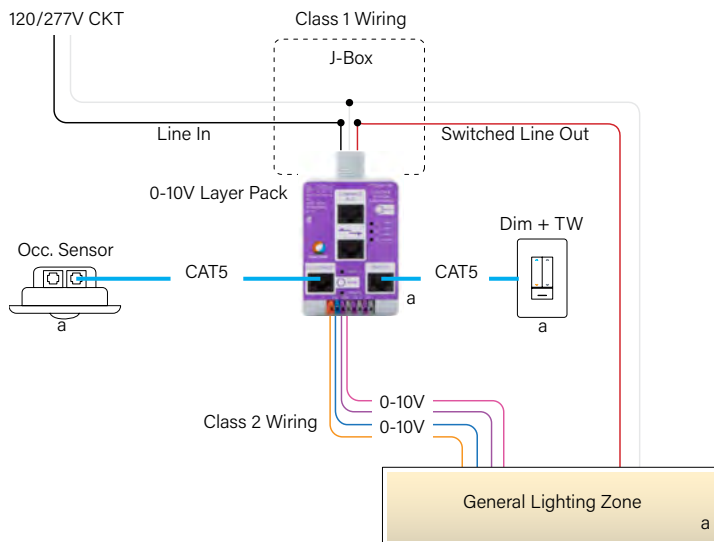


Luminaire Wiring

- **Purple (+) / Pink (-)** control wires are for intensity control
- **Orange (+) / Blue (-)** control wires are for Tunable White control


Note:

Load or Dim to Off options available.

DUAL FEED DETAIL



WIRING LEGEND		
Black	Hot	Line Voltage
White	Neutral	Line Voltage
Green	Ground	



WIRING LEGEND		
Pink	Dimming	0-10V DC
Purple	Dimming	0-10V DC
Orange	TW	0-10V DC
Blue	TW	0-10V DC

