



# HP-4 WL


High Performance 4" Aperture Wet Location

# High Performance 4" Wet Location (HP-4 WL)

HP-4 Wet Location was designed to be a robust linear lighting solution for variable environments without sacrificing the time tested clean line aesthetic of the standard HP-4 product.

Approved with a dust and water rating of IP65 and an impact rating of IK10, the HP-4 WL is built to withstand the challenges of outdoors.

This product is enrolled in the International Living Future Institute (ILFI) Declare2.0Program and is third-party verified.

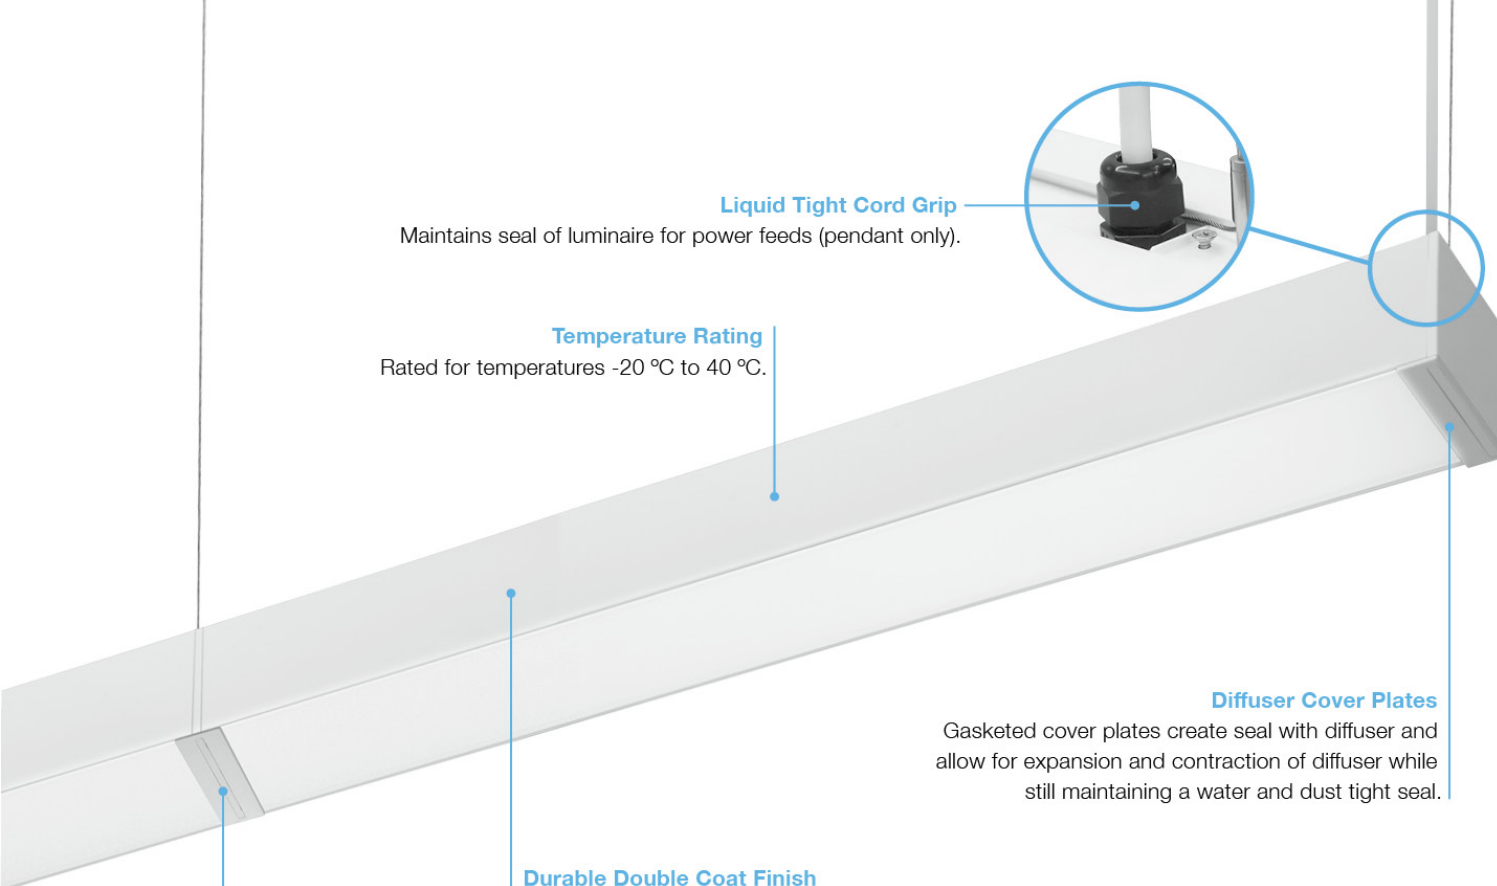

**Liquid Tight Cord Grip**

Maintains seal of luminaire for power feeds (pendant only).

**Temperature Rating**

Rated for temperatures -20 °C to 40 °C.

**Diffuser Cover Plates**

Gasketed cover plates create seal with diffuser and allow for expansion and contraction of diffuser while still maintaining a water and dust tight seal.


**Durable Double Coat Finish**

Extruded aluminum housings are powder coated with two coats to withstand harsh environments.

**Continuous Rows With Feed Through Wiring**

State-of-the-art joining architecture provides water-tight joints. Following the same joining method as standard HP-4 products, installing contractors can repeatedly produce clean tight joints both indoors and out.



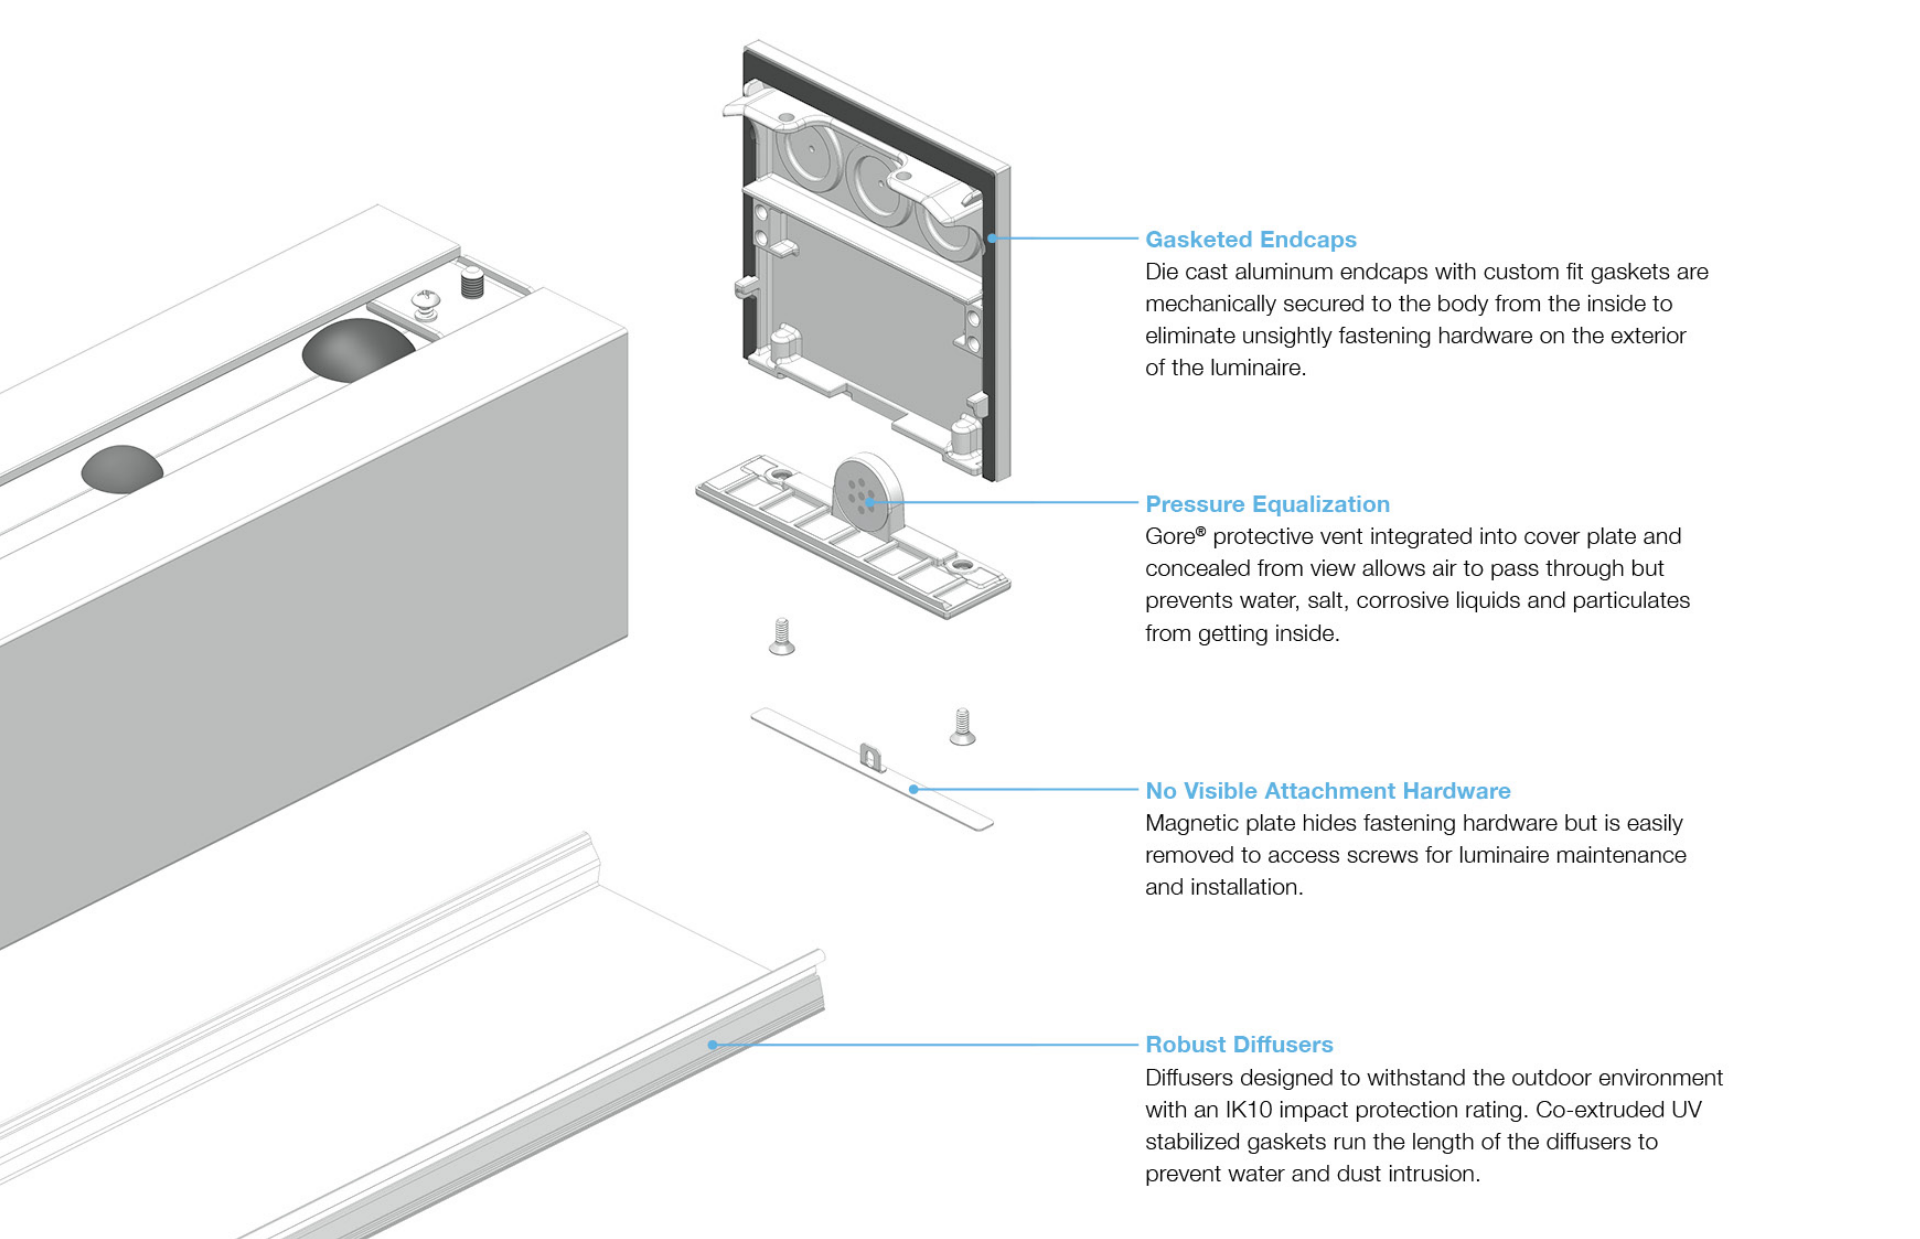

**Gasketed Endcaps**

Die cast aluminum endcaps with custom fit gaskets are mechanically secured to the body from the inside to eliminate unsightly fastening hardware on the exterior of the luminaire.

**Pressure Equalization**

Gore® protective vent integrated into cover plate and concealed from view allows air to pass through but prevents water, salt, corrosive liquids and particulates from getting inside.

**No Visible Attachment Hardware**

Magnetic plate hides fastening hardware but is easily removed to access screws for luminaire maintenance and installation.

**Robust Diffusers**

Diffusers designed to withstand the outdoor environment with an IK10 impact protection rating. Co-extruded UV stabilized gaskets run the length of the diffusers to prevent water and dust intrusion.

# Performance

## HP-4 Direct Wet Location

HP-4-WL-D-4'-V-835

Very High Output – 4' Luminaire

Efficacy: 94 lumens per watt


Total Luminaire Output: 3456lumens (864lumens/foot)

36.9 watts (9.2 watts/foot)

CCT: 3500K

CRI: 80

ITL LM79 Report 90390

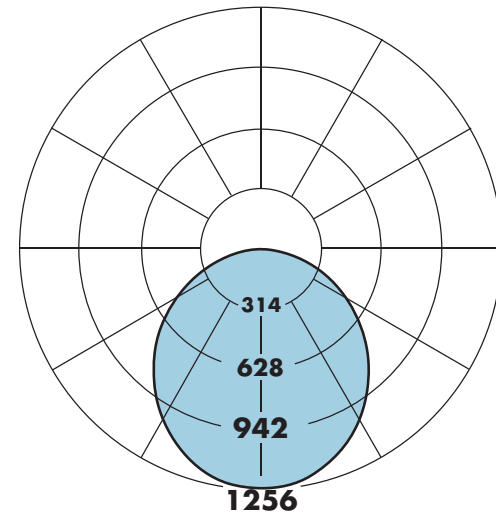


### Note

- For complete photometric data please see technical sheet.
- For Tunable White data please see Tunable White technical sheet.


# Outdoor Overhang Application Data

	HP-4-WL-SM-4'-S-835-F
Average Light Level (Footcandles)	15
Energy Consumption (Lighting Power Density)	0.37 W/ft <sup>2</sup>
Outdoor Overhang Size (Area)	12' x 39-1/2'


- Ceiling Height: 12'6" AFF
- Reflectances: 50/50/20
- Light levels are initial

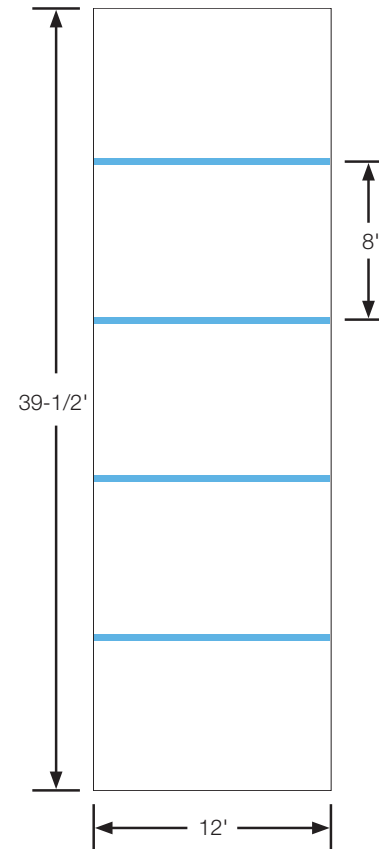


# Cross Sections




HP-4 WL D  
Fully Adjustable<sup>1</sup>




HP-4 WL D  
Rigid Stem<sup>2</sup>




HP-4 WL SM<sup>3</sup>



HP-4 WL SF



HP-4 WL VF



HP-4 WL WM

<sup>1</sup> Fully adjustable aircraft cable made of 316 Stainless Steel to withstand corrosion.

<sup>2</sup> 1/2" IPS Rigid Stem available in 12", 18", 24", or 36" overall length.

<sup>3</sup> Available in ceiling and horizontal only.

# Lengths


2', 3', 4', 5', 6', 7', and 8' section lengths. Independent and continuous rows available.

For **independent luminaires**, add 1/4" for each endcap to overall length.

Example: 4' = 4'-1/2"



Example: 8' = 8'-1/2"



For **continuous rows**, add 1/4" for each endcap and 1/4" for each joint to overall length.

Example: 24' = 24'-1"







# Finelite LED Difference




5-year performance-based warranty



90% of initial light output at 100,000+ hours



Dimming Standard



Replaceable LED light arrays

# Finelite Commitment To You



10-working-day shipping on standard orders



Focus on sustainability



Buy American Act of 2009 Compliant