


Submitted by:		Date:
Type:	Project:	
Ordering Info:		

# High Performance 2" Aperture (HP-2) Wall Mount and Arm Mount

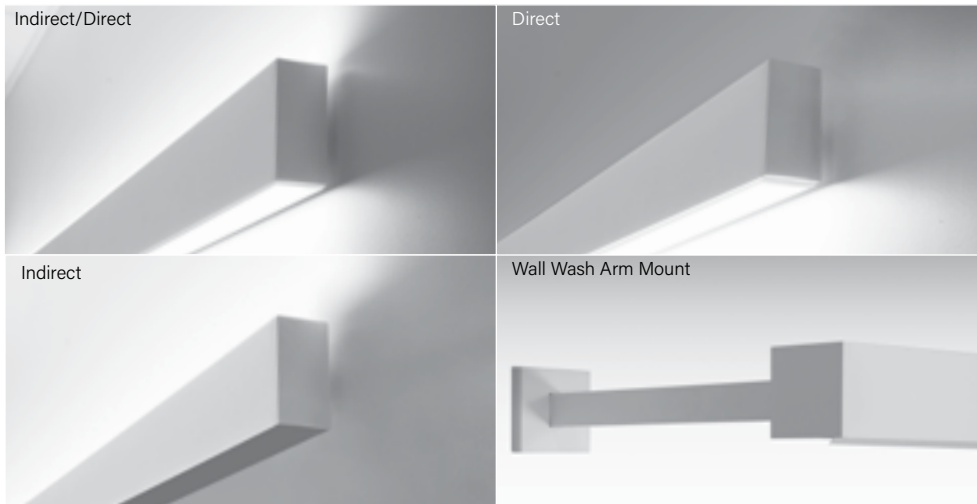


High Performance 2" Aperture is a patented, linear LED luminaire family. HP-2 delivers excellent performance using an advanced optical design and mid-power LEDs. Achieving 90% of initial light output at 100,000+ hours and backed by a 10-year performance-based warranty on all standard components.

This product is enrolled in the International Living Future Institute (ILFI) Declare 2.0 Program and is third-party verified with options achieving **Red List Approved** and **Red List Declared** status.


Signal White is standard finish

**Note:** see page 6 for all aesthetic options


## CROSS SECTIONS

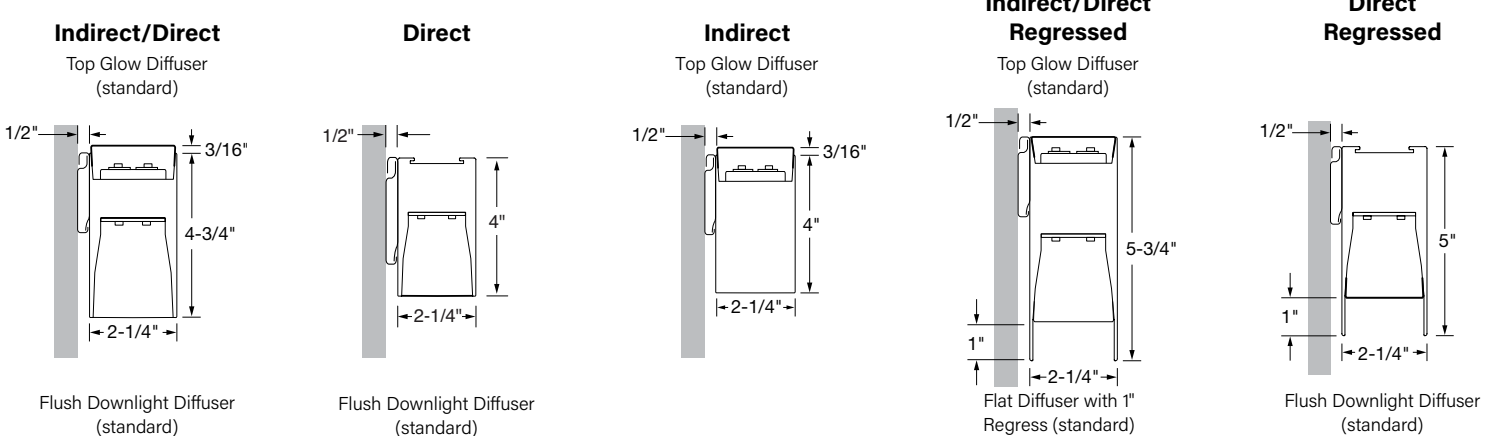

## Wall Wash Arm Mount

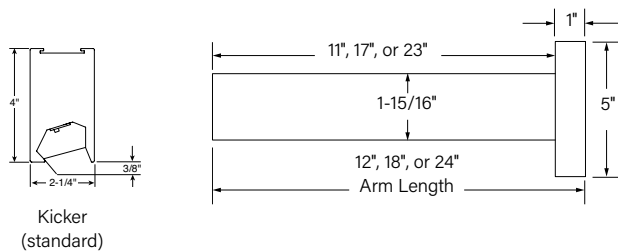

## ALSO AVAILABLE IN

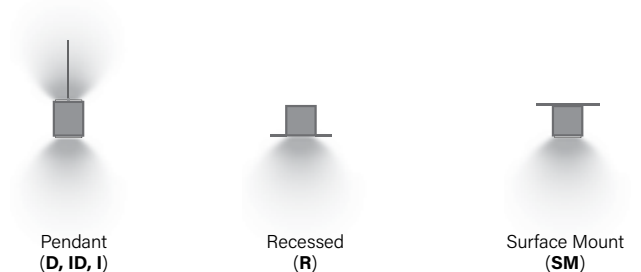

Submitted by:		Date:
Type:	Project:	
Ordering Info:		

# High Performance 2" Aperture (HP-2) Wall Mount and Arm Mount

Ordering Guide Example: HP - 2 - WM - ID - 36' - S - S - 835 - F - BG - 96LG - 120 - DC - FC-10% - MB - C1 - FE - SW - LGD18W - OBO - RLD

## BODY TYPE

## OUTPUT AND LED TYPE

Platform	Series Name	Luminaire Type	Luminaire Distribution	Total Length of Run	Uplight Output ID & I Only (Flush)	Downlight Output ID & D Only (Flush)
HP - High Performance	2	<b>WM</b> - Wall Mount <sup>1</sup> <b>WM RG</b> - Wall Mount Regressed <sup>1</sup> <b>AM</b> - Arm Mount <b>AM RG</b> - Arm Mount Regressed	<b>Wall Mount</b> <b>D</b> - Direct <b>ID</b> - Indirect/Direct <b>I</b> - Indirect  <b>Arm Mount</b> <b>D</b> - Direct <b>ID</b> - Indirect/Direct <b>I</b> - Indirect (Not available for <b>AM RG</b> ) <b>WW-D</b> - Wall Wash Direct (Not available for <b>AM RG</b> )	Minimum 2' section length. Increments accurate to 1/16" (±1/32"), standard. 12' maximum section length.	<b>S</b> - Standard (393 lm/ft) <b>B</b> - Boosted (494 lm/ft) <b>H</b> - High (747 lm/ft) <b>V</b> - Very High (961 lm/ft) <b>TL</b> - Tailored: _____lm/ft*	<b>S</b> - Standard (322 lm/ft) <b>B</b> - Boosted (405 lm/ft) <b>H</b> - High (612 lm/ft) <b>V</b> - Very High (786 lm/ft) <b>TL</b> - Tailored: _____lm/ft*

Lumen provided above are for Flush lens only, see pg. 13 for WW lumens. 2ft. luminaires can only have one output only, **S** or **B**. No dual circuit or separate uplight/downlight. Uplight and downlight can be specified with different outputs and dual circuit on luminaires 3ft and longer. \* Specify Tailored lm/ft of outputs between Standard (**S**) and Very High (**V**). Consult factory for tailored lumen output outside of this range.

## OUTPUT AND LED TYPE

## MECHANICAL/OPTICAL OPTIONS

LED CRI/CCT	Uplight	Downlight	Reflector System
<b>830</b> - 80 CRI, 3000K <b>835</b> - 80 CRI, 3500K <b>840</b> - 80 CRI, 4000K <b>930</b> - 90 CRI, 3000K <b>935</b> - 90 CRI, 3500K <b>940</b> - 90 CRI, 4000K <b>8TW</b> - 80 CRI, Tunable White <b>9TW</b> - 90 CRI, Tunable White	<b>TG</b> - Top Glow (standard) <b>F</b> - Flush <b>ASY-L</b> - Asymmetric Left Optic <b>ASY-R</b> - Asymmetric Right Optic <b>ASYTG-L</b> - Asymmetric Left Optic with Top Glow <b>ASYTG-R</b> - Asymmetric Right Optic with Top Glow <b>WSO</b> - Widespread Optic <b>WSOTG</b> - Widespread Optic with Top Glow	<b>F</b> - Flush (standard) <sup>1</sup> <b>BG</b> - Bottom Glow <sup>1</sup> <b>DL</b> - 1" Drop Down Lens <sup>1</sup> <b>RG-D</b> - Flat Diffuser with 1" Regress <sup>1,2</sup> <b>RG-WCB</b> - White Cross Blade Baffle <sup>1,2</sup> <b>RG-LHE</b> - Hollowed Ellipse Louver <sup>1,2</sup> <b>RG-LHC</b> - Hex Louver <sup>1,2</sup> <b>DAO-L</b> - Downlight Asymmetric Optic Left <sup>3</sup> <b>DAO-R</b> - Downlight Asymmetric Optic Right <sup>3</sup> <b>K</b> - Kicker for Wall Wash only (standard) <sup>4</sup> <b>FO</b> - Fully Open for Wall Wash only	<b>96LG</b> - 96 Low Gloss White <b>SW</b> - Signal White for Wall Wash only

## ELECTRICAL OPTIONS

## MOUNTING OPTIONS

Voltage	Circuiting <sup>5</sup>	Driver Selection	Mounting Method	
<b>120</b> - 120 Voltage <b>277</b> - 277 Voltage <b>347</b> - 347 Voltage	<b>SC</b> - Single Circuit* One single circuit in a run <b>DC</b> - Dual Circuit* <sup>6</sup> Independent control of up and down separately in an I/D style fixture <b>MC</b> - Multi-Circuit* More than one switch leg or zone. Factory shop drawings required  * Battery, Night Light, and Emergency to Generator circuits are in addition to the normal luminaire circuit(s)	<b>0-10V Driver Options</b> <b>FC-10%</b> - 0-10V 10% (standard) <b>FC-1%</b> - 0-10V 1% <b>OTI-10%</b> - EldoLED OTI, 0-10V 10% <sup>7</sup> <b>OTI-1%</b> - EldoLED OTI, 0-10V 1% <sup>7</sup> <b>ELD-10V-0%</b> - EldoLED SOLOdrive, 0-10V 0.1% <b>10V-TW-10%</b> - EldoLED OTI, 0-10V 10% (Tunable White) <sup>7</sup>  <b>DALI Driver Options</b> <b>FC-DALI-1%</b> - DALI 1% <b>DXL-DALI-1%</b> - EldoLED Dexal, 1% <b>ELD-DALI-0%</b> - EldoLED SOLOdrive, 0.1% <b>ELD-DALI-TW</b> - EldoLED DUALdrive LightShape, 0.1% (Tunable White)	<b>Lutron Driver Options</b> <b>LUT-ES1</b> - Lutron, Ecosystem 1% <b>LUT-TW</b> - Lutron T-Series, EcoSystem 0.1% (Tunable White)  See Page 3 for additional driver options and details	<b>MB</b> - Mounting Bracket <sup>9</sup> <b>AM12</b> - 12" <sup>10</sup> <b>AM18</b> - 18" <sup>10</sup> <b>AM24</b> - 24" <sup>10</sup>

## OTHER OPTIONS

Endcap Style	Finish	Emergency Style (Optional) <small>See page 5 Backup Battery table</small>	Integrated Sensor (Optional) <sup>14</sup>	Special Options (Optional)
<b>FE</b> - Flat Endcap (standard) <b>DE</b> - 1" Drop Endcap <sup>11</sup> <b>OE</b> - Open Endcap <sup>12</sup>	<b>SW</b> - Signal White (standard) <b>FB</b> - Finelite Black <b>SA</b> - Satin Aluminum <b>####</b> - RAL Color Code <sup>13</sup>	<b>LGD18W</b> - Legrand 18W Brand Battery Back-up <b>LGD10W</b> - Legrand 10W Brand Battery Back-up <b>EM/GEN</b> - Emergency to Generator <b>NL</b> - Night Light <b>BSL310LP</b> - Bodine Battery Back up Low Profile <b>GTD</b> - Generator Transfer Device <b>ALCR</b> - Automatic Load Control Relay	<b>OBO</b> - Occupancy <sup>1</sup> (Not available with Indirect) <b>OBD</b> - Daylight <sup>1</sup> <b>W601</b> - Wattstopper Wireless Sensor <sup>15</sup> <b>OBE</b> - Enlighted <sup>1,16</sup> <b>REE</b> - Remote Enlighted <sup>17</sup> <b>CLM-99</b> - Encelium RF <b>SLM-99</b> - Encelium Sensor <b>AOCC-W</b> - Lutron Athena Sensor (Device Color White) <sup>18</sup> <b>AOCC-B</b> - Lutron Athena Sensor (Device Color Black) <sup>18</sup> <b>ARF-W</b> - Lutron Athena RF (Device Color White) <sup>18</sup> <b>ARF-B</b> - Lutron Athena RF (Device Color Black) <sup>18</sup> <b>VOCC</b> - Lutron Vive Wireless Sensor (VDO) <sup>19</sup> <b>VRF</b> - Lutron Vive Radio Only <sup>19</sup>	<b>RLA</b> - Red List Approved <b>RLD</b> - Red List Declared

<sup>1</sup> Not available for Wall Wash

<sup>2</sup> D & ID Regressed only

<sup>3</sup> Not available with regressed

<sup>4</sup> Kicker standard in Signal White. Customer Custom color kickers have a surcharge

<sup>5</sup> Contact factory for switching options

<sup>6</sup> Indirect/Direct only

<sup>7</sup> Add DTO to gain "Dim to Off" functionality (FC-10% - DTO, FC-1% - DTO)

<sup>8</sup> B & V outputs only

<sup>9</sup> Wall Mount only

<sup>10</sup> Arm Mount only

<sup>11</sup> 1" Drop Down Lens downlight only

<sup>12</sup> Available with Hollowed Ellipse Louver (LHE) only

<sup>13</sup> 20 business days lead time for color

<sup>14</sup> Minimum fixture length: Direct and Indirect with a sensor is 3ft. Indirect/Direct with a sensor is 4ft.

<sup>15</sup> LMFS-601 w/ 0-10V driver(s) and LMFI-111, up to 6 drivers may be connected.

<sup>16</sup> B & V outputs only

<sup>17</sup> Enlighted components installed by Finelite, provided by others.

<sup>18</sup> Enlighted for Wall Wash fixtures. Enlighted Control Unit & Sensor Cable installed for Remote mounting sensor.

<sup>19</sup> 0-10V Drivers - **AOCC** up to 10 drivers may be connected; **ARF** up to 40 drivers may be connected

<sup>20</sup> DALI Drivers - **AOCC** & **ARF** up to 4 drivers can be connected.

<sup>21</sup> Lutron Vive Integrated Sensors require a DALI driver. Not available with Indirect.

Submitted by:		Date:
Type:	Project:	
Ordering Info:		

# High Performance 2" Aperture (HP-2) Wall Mount and Arm Mount

## SUPPLEMENTARY DRIVER PAGE

### 0-10V Driver Options

<b>FC-10%</b>	Factory Choice, 0-10V 10% Dimming (Linear)
<b>FC-10%-DTO</b>	Factory Choice, 0-10V 10% Dimming, Dim-to-Off (Linear)
<b>FC-1%</b>	Factory Choice, 0-10V 1% Dimming (Linear)
<b>FC-1%-DTO</b>	Factory Choice, 0-10V 1% Dimming, Dim-to-Off (Linear)
<b>ELD-10V-0%</b>	EldoLED SOLOdrive, 0-10V 0.1% Dimming (Linear)
<b>ELD-10V-1%</b>	EldoLED ECOdrive, 0-10V 1% Dimming (Linear)
<b>10V-TW-10%</b>	EldoLED OTi, 0-10V 10% Dimming, Tunable White (Linear)
<b>10V-TW-10%-DTO</b>	EldoLED OTi, 0-10V 10% Dimming, Dim-to-Off, Tunable White (Linear)
<b>OTi-10%</b>	EldoLED OTi, 0-10V 10% Dimming (Linear)
<b>OTi-10%-DTO</b>	EldoLED OTi, 0-10V 10% Dimming, Dim-to-Off (Linear)
<b>OTi-1%</b>	EldoLED OTi, 0-10V 1% Dimming (Linear)
<b>OTi-1%-DTO</b>	EldoLED OTi, 0-10V 1% Dimming, Dim-to-Off (Linear)

### DALI Driver Options

<b>FC-DALI-1%</b>	Factory Choice, DALI 1% Dimming (Logarithmic)
<b>DXL-DALI-1%</b>	EldoLED Dexal, DALI 1% Dimming (Logarithmic)
<b>ELD-DALI-0%</b>	EldoLED SOLOdrive, DALI 0.1% Dimming (Logarithmic)
<b>ELD-DALI-1%</b>	EldoLED ECOdrive, DALI 1% Dimming (Logarithmic)
<b>ELD-DALI-TW</b>	EldoLED DUALdrive Light Shape, DALI 0.1% Dimming, Tunable White (Logarithmic Dimming, Linear CCT Control)

### Lutron Driver Options

<b>LUT-ES1</b>	Lutron, Ecosystem 1% Dimming
<b>LUT-TW</b>	Lutron T-Series, EcoSystem 0.1% Dimming, Tunable White

Submitted by:		Date:
Type:	Project:	
Ordering Info:		

# High Performance 2" Aperture (HP-2) Wall Mount and Arm Mount

## SPECIFICATIONS

### BODY TYPE

**CONSTRUCTION:** Precision-cut 6063-T6 extruded aluminum body. Internal joiner system and plug-together wiring are standard.

**LENGTHS:** Any length, 2' minimum, in increments down to 1/16th" ( $\pm 1/32"$ ). 12' maximum section length. Hollowed Ellipse Louver (**LHE**), Hex Louver (**LHC**), and White Cross Blade Baffle (**WCB**) are available in 1' increments.

**MITERED CORNERS<sup>1</sup>:** Illuminated corners of greater than 60° and less than 180° in a single plane, available with Flush Diffuser, Bottom Glow Diffuser, Regressed Diffuser, or White Cross Blade Baffle<sup>3</sup>. Corners not available with Wall Wash (**WW-D**), Hollowed Ellipse Louver (**LHE**), Hex Louver (**LHC**), 1" Drop Down Lens. Contact factory for Double miters using the White Cross Blade Baffle. Consult factory for tailored lighting options.

### OUTPUT AND LED TYPE

**LIGHT OUTPUT:** Four lumen packages available, Standard (**S**), Boosted Standard (**B**), High (**H**), and Very High (**V**). 2' can only have one driver. 2' cannot have different lumen packages for uplight and downlight, cannot be dual circuit, and cannot be H or V output. For lengths 3' and greater, the uplight and downlight can be specified with different lumen packages and dual controls. For Tailored Outputs outside of range from Standard (**S**) to Very High (**V**), consult factory. Light engines are replaceable.

### MECHANICAL/OPTICAL OPTIONS

**UPLIGHT OPTION<sup>4</sup>:** Patented Top Glow frost white diffuser standard. 12' maximum diffuser length. 73% transmissive, 99% diffusion. Internal secondary diffusers at corners ensure visually seamless, uniform, continuous illumination. Optional: Flush frost white snap-in diffuser, 73% transmissive, 99% diffusion; Widespread Optic (**WSO**) and Widespread Optic with Top Glow (WSOTG); WSO enables increased luminaire spacing with improved ceiling uniformity. Asymmetric optic directs light in a specific direction. **ASY-L** distributes light to the left, **ASY-R** distributed light to the right of the luminaire. Consult factory for more tailored lumen outputs.

**DOWNLIGHT OPTION<sup>5</sup>:** 12' maximum diffuser length. Flush frost white snap-in diffuser standard, 73% transmissive, 99% diffusion. Internal secondary diffusers at corners ensure visually seamless, uniform, continuous illumination. Available with Flush (**F**), Bottom Glow (**BG**), 1" Drop Down Lens (**DL**), White Cross Blade Baffle (**WCB**)<sup>6</sup>, Hollowed Ellipse Louver (**LHE**)<sup>6</sup>, Hex Louver (**LHC**)<sup>6</sup>, Downlight Asymmetric Optic (**DAO**)<sup>7</sup>, and Regressed downlight diffusers (**RG**). 1" Drop Down Lens made of highly efficient acrylic. Available with a solid endcap or an endcap with a diffuse filler to continue the luminous aesthetic. Downlight Asymmetric Optic is an extruded lens with a subtle ribbed appearance providing an asymmetric distribution for improved optical performance. Consult factory for more tailored lumen outputs.

**LUMEN MAINTENANCE:** 90% of initial light output (L90) at 100,000+ hours; 70% of initial light output (L70) at 200,000+ hours.

**REFLECTORS: Wall Mount:** Die-formed 20-gauge cold-rolled steel reflectors finished in 96LG High Reflectance white power coat paint. **Arm Mount:** The standard Signal White (**SW**) Kicker (**K**) reflector delivers light high on the vertical surface. The Kicker reflector can be easily removed for open distribution (**FO**).

### ELECTRICAL FEATURES

**STATIC WHITE FEED:** Standard with one 18-gauge/5-conductor single-circuit feed controlling uplight and downlight together (power and dimming). Specify dual feeds for independent control of uplight and downlight. 14-gauge feed used when luminaire current exceeds 5 amps.

**TUNABLE WHITE FEED:** Standard with one 18-gauge/5-conductor single-circuit feed. 14-gauge feed used when luminaire current exceeds 5 amps. DMX and power feed at same location (standard). DMX feeds cannot be cut or spliced. DMX feeds should be ordered based on fixed lengths.

**STATIC WHITE DRIVER:** Replaceable 120V, 277V, and 347V Constant Current Reduction dimming driver standard. Can be wired dimming or non-dimming. 0-10V dimming controls with a range of 10%- 100% standard. Dimming to 1% available. Separate dimming for uplight and downlight available. Driver is fully accessible from below the ceiling.

- **Power Factor:**  $\geq 0.9$
- **Total Harmonic Distortion (THD):** <20%
- **Expected driver lifetime:** 100,000 hours

### LUTRON DRIVER OPTIONS:

- **LUT-ES1 (LDE1)** - (Hi-lume 1% EcoSystem with Soft-On, Fade-to-Black dimming (LDE1 series))

**TUNABLE WHITE DRIVER:** Replaceable LED driver. Driver is accessible from below the ceiling. 120V, 277V, and 347V.

- **Power factor:**  $\geq 0.90$
- **Total Harmonic Distortion (THD):** <20%
- **Dimming Range:** 100%-10%
- **Expected driver lifetime.:** 100,000 hours

**LUTRON TUNABLE WHITE DRIVER OPTION: LUT-TW** (1% T-Series 2-Channel Digital Tunable White (PSQ Series)).

### MOUNTING OPTIONS

**HANGING HARDWARE: Wall Mount:** Luminaire hangs securely from mounting brackets fastened directly to the wall for easy installation. Luminaire stands 1/2" off the wall. The mounting bracket is concealed behind the luminaire. **Arm Mount:** bracket mounts directly to wall j-box, extends luminaire 12", 18", or 24" from wall. Other lengths available. Consult factory.

<sup>1</sup> Not available with Wall Wash

<sup>2</sup> Indirect/Direct and Direct only

<sup>3</sup> White Cross Blade (WCB) baffles not available with custom angles. Available in 90 degrees only

<sup>4</sup> Wall Mount Indirect/Direct, Wall Mount Regressed Indirect/Direct, and Wall Mount Indirect only

<sup>5</sup> Wall Mount Indirect/Direct, Wall Mount Regressed Indirect/Direct, Wall Mount Direct, and Wall Mount Regressed Direct only

<sup>6</sup> Wall Mount Regressed Indirect/Direct & Wall Mount Regressed Direct only

<sup>7</sup> Not available with Regressed

Submitted by:		Date:
Type:	Project:	
Ordering Info:		

# High Performance 2" Aperture (HP-2) Wall Mount and Arm Mount

## SPECIFICATIONS

**TUNABLE WHITE DMX HANGING HARDWARE:** For grid ceiling applications the dual GridBox™ mounting is supplied (standard). For hard ceiling applications the ceiling mounting box is supplied (standard).

**TUNABLE WHITE INTERCONNECTION CABLES:** Luminaires are pre-wired with plug-and-play interconnection cables to support easy plug-together joining of luminaire runs.

## OTHER OPTIONS

**ENDCAPS:** Flat diecast aluminum endcaps (**FE**) add 1/4" to each end of luminaire. 1" Drop Down Lens Endcap (**DE**)<sup>8</sup> includes diffuse element to continue luminance of drop lens. Open Endcap (**OE**) is for use with the Hollowed Ellipse Louver (**LHE**); following the curve of the louver.

**EMERGENCY STYLE:** Optional emergency to generator/inverter wiring, internal generator transfer switch, nightlight wiring, step-dimming driver, backup battery. Factory choice low-profile backup battery available. 8' minimum luminaire length for low profile battery pack.

Backup Battery		
	Legrand 18W	Legrand 10W/ Bodine BSL310LP
<b>HP2-WM-D</b>		
Min. Housing Length	8*	4'*, **
EM Lumen Output	1608	956
EM Section Illuminated	2'	2' or 4'
<b>HP2-WM-WW-D</b>		
Min. Housing Length	8*	4*
EM Lumen Output	1500	891
EM Section Illuminated	4'	4'

\* Minimum fixture housing length for battery pack approved without sensor. \*\* Exception: 5' not available, 6'+ okay. The lumens are based on 835. For other CCT/CRI, refer to the Lumen Adjustment Factor table on page 10.

Backup Battery		
	Legrand 18W	Legrand 10W/ Bodine BSL310LP
<b>HP2-WM-ID</b>		
Min. Housing Length	12'	8'
EM Lumen Output	1608	956
EM Section Illuminated	2'	2' or 4'
<b>HP2-WM-I</b>		
Min. Housing Length	8*	4*
EM Lumen Output	1874	956
EM Section Illuminated	2'	2' or 4'

\* Minimum fixture housing length for battery pack approved without sensor. The lumens are based on 835. For other CCT/CRI, refer to the Lumen Adjustment Factor table on page 9.

Bodine GTD and Legrand ALCR Min. Length	
Configuration	Min Length
Generator	D-4'; I-4'; ID-6'
Generator + OCC	D-6'; I-6'; ID-8'
Daylight	D-4'; I-4'; ID-6'
Generator + Daylight	D-6'; I-6'; ID-8'

**Indirect/Direct:** backup batteries deliver 1608 lumens. 12' minimum luminaire length. 2' illuminated (downlight standard).

- **Direct:** backup batteries deliver 1608 lumens. 8' minimum luminaire length. 2' illuminated.
- **Indirect:** backup batteries deliver 1874 lumens. 8' minimum luminaire length. 2' illuminated.
- **Wall Wash:** backup batteries deliver 1500 lumens. 8' minimum luminaire length. 2' illuminated.

## Tunable White ELECTRICAL OPTIONS<sup>9</sup>:

- **TW Driver Options 0-10V:** EM/GEN, GTD or Battery Back up
- **DALI:** EM/GEN, GTD or Battery Back up
- **LUTRON:** EM/GEN, GTD or Battery Back up

**INTEGRATED SENSORS:** Integrated PIR (Passive Infrared) Occupancy (**OBO**) or Daylight Sensors (**OBD**) available with Flush and Bottom Glow downlight diffusers. PIR sensors not recommended for stairwell applications. Refer to Occupancy Sensor & Daylight Sensor tech sheet and the Embedded Intelligence landing page for more information and additional sensor options. Minimum fixture length: Direct and Indirect with a sensor is 3ft. Indirect/Direct with a sensor is 4ft..

**FINISHES:** Finelite Signal White (**SW**) powder coat, Finelite Black (RAL 9005) with semi gloss fine texture (**FB**), and Satin Aluminum (**SA**) are standard. Optional Adder: 179 RAL colors<sup>10</sup> are available.

**LABELS:** Luminaire and electrical components are ETL-listed conforming to UL 1598 in the U.S.A. and CAN/CSA C22.2 No. 250.0 in Canada. In accordance with NEC Code 410.130 (G), this luminaire contains an internal driver disconnect. UL 924 and UL 2108 - PoE options available on request. These fixtures are rated for Damp Location. HP-2 can be used to comply with 2016 Title 24, Part 6 (JA8); high efficacy LED light source requirements. Finelite products use electronic components that are RoHS compliant, and the mechanical components of the luminaire have been verified to not knowingly contain any restricted substances listed per RoHS Directive 2015/863. Consult factory for tailored lighting options. Finelite makes the specification process easy when putting healthier products on your projects. Simply add - **RLA** (Red List Approved) or - **RLD** (Red List Declared) to your part number.

**WEIGHT<sup>11</sup>:** ID - 2.9 lb/ft; D - 2.3 lb/ft; I - 2.3 lb/ft; AM - 2.9 lb/ft (luminaire only)

**WARRANTY:** 10-year performance-based warranty on all standard components. Optional accessories such as emergency battery packs are covered by their individual manufacturer warranties.

<sup>8</sup> Available in Indirect/Direct Regressed & Direct Regressed only  
<sup>9</sup> Consult Finelite for Generator Transfer Device and Battery Back up fit  
<sup>10</sup> 20 business days lead time for color  
<sup>11</sup> Excludes Battery Back up and Generator Transfer Device weight

Submitted by:		Date:
Type:	Project:	
Ordering Info:		

# High Performance 2" Aperture (HP-2) Wall Mount and Arm Mount


## AESTHETIC OPTIONS



Flush Diffuser (**F**)



Bottom Glow Diffuser (**BG**)

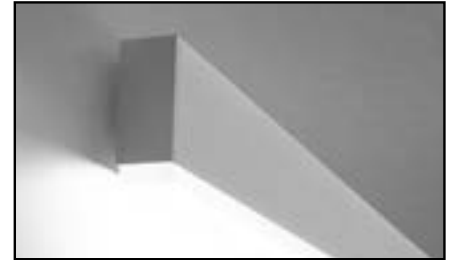


1" Drop Down Lens (**DL**)



Downlight Asymmetric Optic (**DAO**)<sup>1</sup>  
Externally flush



Flat Diffuser with 1" Regressed (**RG-D**)

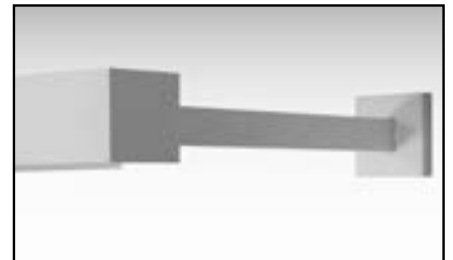

Kicker (**K**) - Wall Wash Arm Mount only



White Cross Blade Baffle<sup>2</sup> (**RG-WCB**)



Hex Louver<sup>2</sup> (**RG-LHC**)



Hollowed Ellipse Louver<sup>2</sup> (**RG-LHE**)

<sup>1</sup> With a subtle ribbed appearance providing an asymmetric distribution

<sup>2</sup> Regressed only



Submitted by:		Date:
Type:	Project:	
Ordering Info:		

# High Performance 2" Aperture (HP-2) Wall Mount and Arm Mount



## ASYMMETRIC OPTIONS

The diagrams below show a linear run from power feed to ender. Specifying ASY-L distributes light to the left or ASY-R distributes light to the right. For proper orientation: view luminaire from starter end when specifying the direction of the Asymmetric optic.

**Asymmetric Left Optic (ASY-L)**

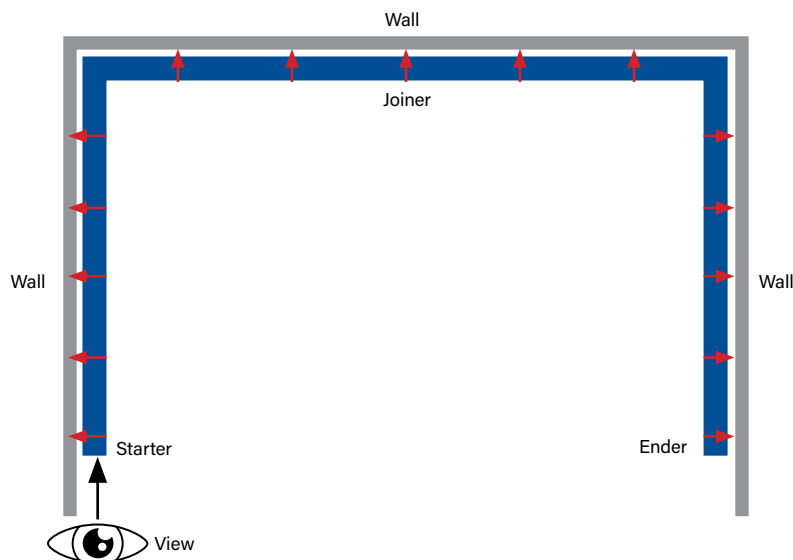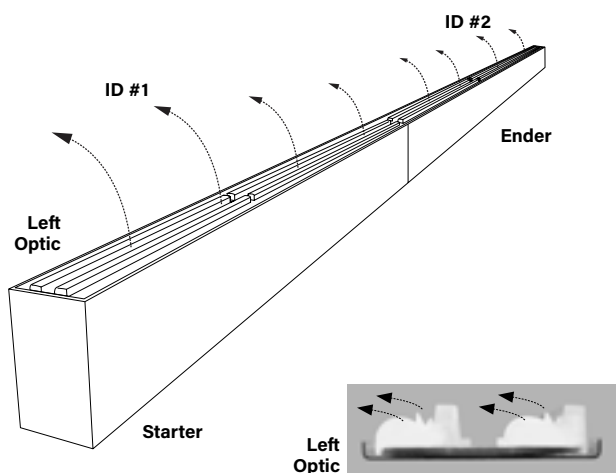

**Asymmetric Right Optic (ASY-R)**

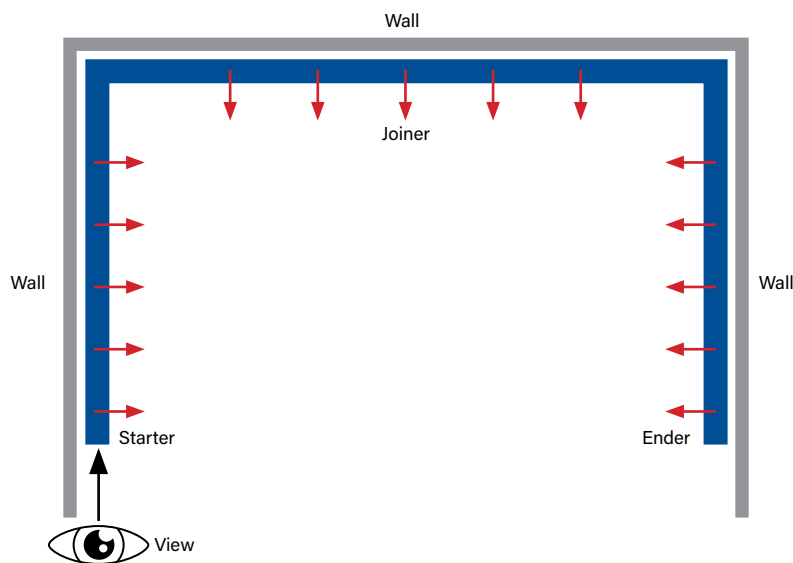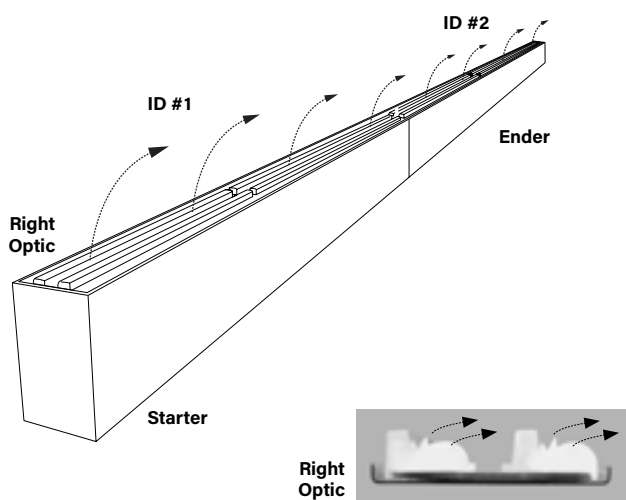


Submitted by:		Date:
Type:	Project:	
Ordering Info:		

# High Performance 2" Aperture (HP-2) Wall Mount and Arm Mount


## DOWNLIGHT ASYMMETRIC OPTIONS

The diagrams below show a linear run from power feed to ender. Specifying DAO-L distributes light to the left or DAO-R distributes light to the right. For proper orientation: view luminaire from starter end when specifying the direction of the Downlight Asymmetric optic.

### Downlight Asymmetric Optic Left (DAO-L)

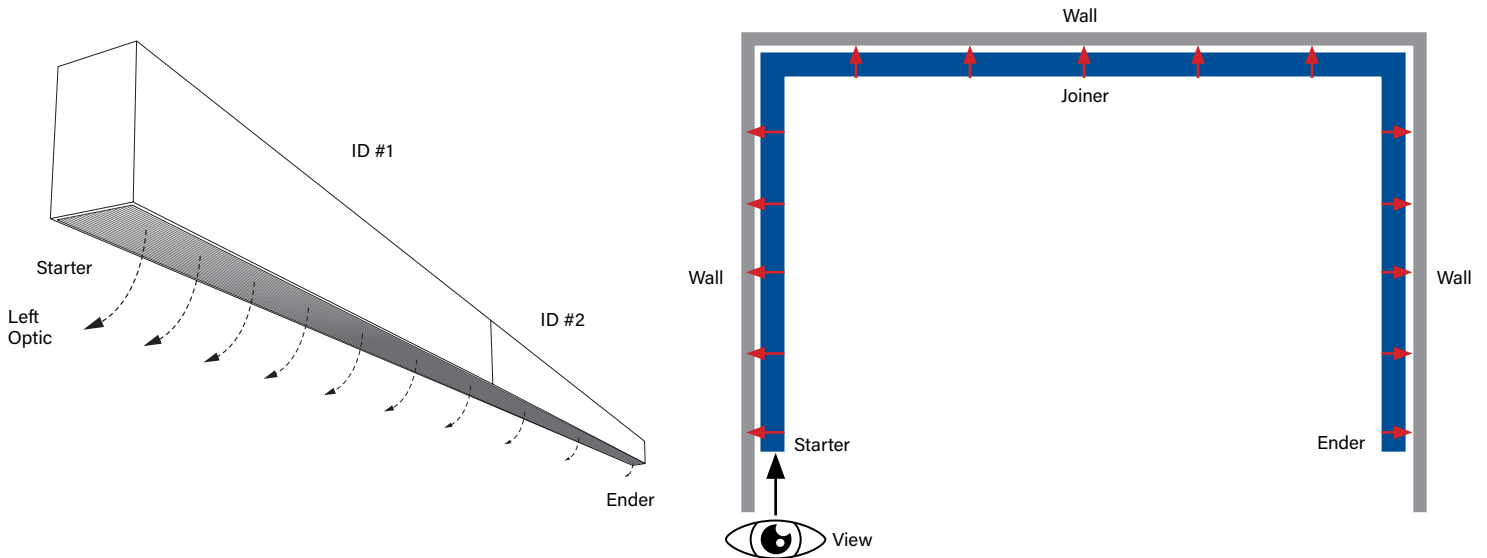

### Downlight Asymmetric Optic Right (DAO-R)

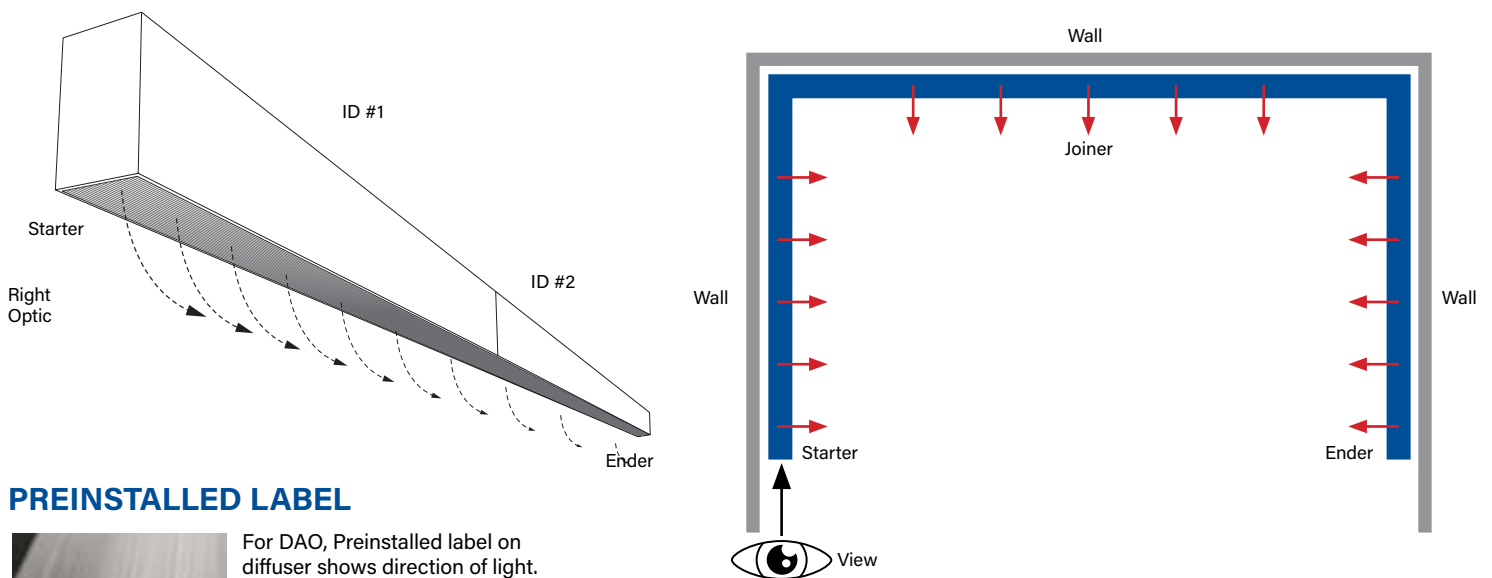

## PREINSTALLED LABEL



For DAO, Preinstalled label on diffuser shows direction of light. Remove after installation.








Submitted by:		Date:
Type:	Project:	
Ordering Info:		

# High Performance 2" Aperture (HP-2) Wall Mount and Arm Mount


## WALL WASH ARM MOUNT - Run Lengths & Mounting Location Examples

Tailored Lengths Available Down To 1/16" (±1/32")



### Endcaps Information

The **Flat Endcap** adds 1/4" per endcap to the section length.

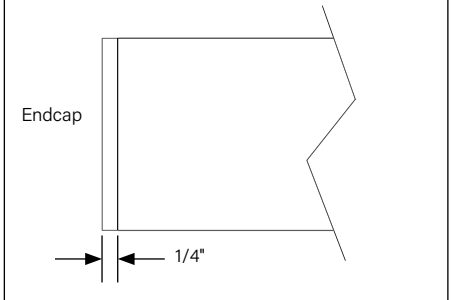

• = Bracket Location

\* = 12' Maximum spacing for two Arm Mount supports

Submitted by:		Date:
Type:	Project:	
Ordering Info:		

# High Performance 2" Aperture (HP-2) Wall Mount and Arm Mount

## Indirect/Direct Photometry - 4' Luminaire 3500K

### HP2-P-ID-4'-V-V-835-ASY-R-DAO-R

**Uplight:** Asymmetric Right Optic  
**Downlight:** Downlight Asymmetric Optic - Right

**Distribution:** 53% Up (V) / 47% Down (V)

**Efficacy:** 112 lm/W

**Uplight:** 4301 lumens (1075 lumens/foot)


**Downlight:** 3742 lumens (936 lumens/foot)

**Total luminaire output:** 8043 lumens (2011 lm/ft)  
72 watts (18 W/ft)

**Peak Candela Value:** 1829 @ 127.5°

CRI: 80 / CCT: 3500K

ITL LM79 Report REP-051921-01



### HP2-P-ID-V-V-835-F-F

**Uplight:** Flush Diffuser  
**Downlight:** Flush Diffuser

**Distribution:** 55% Up (V) / 45% Down (V)

**Efficacy:** 95 lm/W

**Uplight:** 3813 lumens (953 lumens/foot)


**Downlight:** 3175 lumens (794 lumens/foot)

**Total luminaire output:** 6988 lumens (1747 lm/ft)  
73.8 watts (18.5 W/ft)

**Peak Candela Value:** 1492 @ 180°

CRI: 80 / CCT: 3500K

ITL LM79 Report 85132



Total Light Output, 3500K, 80 CRI (Lumens) - 4' Luminaire

	1S <sup>1</sup>	1B <sup>1</sup>	1H <sup>1</sup>	1V <sup>2</sup>
1S <sup>1</sup>	3292 [153%   47%↓]	3745 [159%   41%↓]	4877 [169%   31%↓]	5833 [174%   26%↓]
1B <sup>1</sup>	3686 [148%   52%↓]	4139 [153%   47%↓]	5271 [163%   36%↓]	6227 [169%   31%↓]
1H <sup>1</sup>	4671 [138%   62%↓]	5124 [143%   57%↓]	6256 [154%   46%↓]	7211 [160%   40%↓]
1V <sup>2</sup>	5503 [132%   68%↓]	5955 [137%   63%↓]	7087 [147%   53%↓]	8043 [153%   47%↓]

Light Output, 3500K, 80 CRI (Lumens Per Foot)

	1S <sup>1</sup>	1B <sup>1</sup>	1H <sup>1</sup>	1V <sup>2</sup>
1S <sup>1</sup>	823	936	1219	1458
1B <sup>1</sup>	922	1035	1318	1557
1H <sup>1</sup>	1168	1281	1564	1803
1V <sup>2</sup>	1376	1489	1772	2011

Power, 3500K (Watts Per Foot)

	1S <sup>1</sup>	1B <sup>1</sup>	1H <sup>1</sup>	1V <sup>2</sup>
1S <sup>1</sup>	7.0	8.0	10.4	12.5
1B <sup>1</sup>	8.0	9.0	11.4	13.5
1H <sup>1</sup>	10.4	11.4	13.8	15.9
1V <sup>2</sup>	12.5	13.5	15.9	18.0

Efficacy, 3500K, 80 CRI (Lumens Per Watt)

	1S <sup>1</sup>	1B <sup>1</sup>	1H <sup>1</sup>	1V <sup>2</sup>
1S <sup>1</sup>	117	117	117	116
1B <sup>1</sup>	115	116	116	116
1H <sup>1</sup>	112	113	113	113
1V <sup>2</sup>	110	111	111	112

S - Standard Output, B - Boosted Standard Output, H - High Output, V - Very High Output

<sup>1</sup> Family Correlation based on 4' luminaire 3500K Very High Output (V) test - 120V.

<sup>2</sup> Based on ITL reports: 89456, 94139

Total Light Output, 3500K, 80 CRI (Lumens) - 4' Luminaire

	1S <sup>1</sup>	1B <sup>1</sup>	1H <sup>1</sup>	1V <sup>2</sup>
1S <sup>1</sup>	2861 (155%   45%↓)	3262 (160%   40%↓)	4265 (170%   30%↓)	5113 (175%   25%↓)
1B <sup>1</sup>	3195 (149%   51%↓)	3596 (155%   45%↓)	4600 (165%   35%↓)	5447 (170%   30%↓)
1H <sup>1</sup>	4030 (139%   61%↓)	4432 (144%   56%↓)	5435 (155%   45%↓)	6282 (161%   39%↓)
1V <sup>2</sup>	4736 (133%   67%↓)	5137 (138%   62%↓)	6141 (148%   52%↓)	6988 (155%   45%↓)

Light Output, 3500K, 80 CRI (Lumens Per Foot)

	1S <sup>1</sup>	1B <sup>1</sup>	1H <sup>1</sup>	1V <sup>2</sup>
1S <sup>1</sup>	715	815	1066	1278
1B <sup>1</sup>	799	899	1150	1362
1H <sup>1</sup>	1008	1108	1359	1571
1V <sup>2</sup>	1184	1284	1535	1747

Power, 3500K (Watts Per Foot)

	1S <sup>1</sup>	1B <sup>1</sup>	1H <sup>1</sup>	1V <sup>2</sup>
1S <sup>1</sup>	7.2	8.2	10.7	12.8
1B <sup>1</sup>	8.2	9.2	11.7	13.8
1H <sup>1</sup>	10.7	11.7	14.2	16.3
1V <sup>2</sup>	12.8	13.8	16.3	18.5

Efficacy, 3500K, 80 CRI (Lumens Per Watt)

	1S <sup>1</sup>	1B <sup>1</sup>	1H <sup>1</sup>	1V <sup>2</sup>
1S <sup>1</sup>	99	99	100	100
1B <sup>1</sup>	97	98	99	99
1H <sup>1</sup>	94	95	96	96
1V <sup>2</sup>	92	93	94	95

S - Standard Output, B - Boosted Standard Output, H - High Output, V - Very High Output

<sup>1</sup> Family Correlation based on 4' luminaire 3500K Very High Output (V) test - 120V.

<sup>2</sup> Based on ITL report: 89132

Wattage is Real Power. If you would like additional details to calculate Apparent Power, please contact your local Finelite representative.

### Sample Lumen Adjustment Calculation

Lumen Adjustment Factors 80 CRI		Lumen Adjustment Factors 90 CRI	
3000K	0.985	3000K	0.746
3500K	1.000	3500K	0.760
4000K	1.032	4000K	0.789

High Output (H) / Standard Output (S), 4000K, 90 CRI  
**Lumen Adjustment Factor:** 0.789

**Total Light Output:** 4265 lm x 0.789 = 3365 lm

**Total Light Output per Foot:** 1066 lm/ft x 0.789 = 841 lm/ft.  
**watts/foot:** 10.5 W/ft.

$$\text{Efficacy} = \frac{841 \frac{\text{lm}}{\text{ft.}}}{10.7 \frac{\text{W}}{\text{ft.}}} = 79 \text{ lm/W}$$

Submitted by:		Date:
Type:	Project:	
Ordering Info:		

# High Performance 2" Aperture (HP-2) Wall Mount and Arm Mount

Indirect/Direct Photometry - 4' Luminaire 3500K

## HP2-P RG-ID-V-V-835-F

**Uplight:** Flush Diffuser / **Downlight:** Regressed Diffuser

**Distribution:** 59% Up (V) / 41% Down (V)

**Efficacy:** 99 lm/W

**Uplight:** 4304 lumens (1076 lumens/foot)


**Downlight:** 2928 lumens (732 lumens/foot)

**Total luminaire output:** 7232 lumens (1808 lm/ft)  
73.2 watts (18.3 W/ft)

**Peak Candela Value:** 1722 @ 180°

CRI: 80 / CCT: 3500K

ITL LM79 Report 90352



## HP2-P-ID-V-V-835-WSO-F

**Uplight:** Widespread Optic / **Downlight:** Fluse Diffuser

**Distribution:** 55% Up (V) / 45% Down (V)

**Efficacy:** 101 lm/W

**Uplight:** 4018 lumens (1005 lumens/foot)


**Downlight:** 3312 lumens (828 lumens/foot)

**Total luminaire output:** 7330 lumens (1833 lm/ft)  
74.5 watts (18.6 W/ft)

**Peak Candela Value:** 1461 @ 0°

CRI: 80 / CCT: 3500K

ITL LM79 Report 89456



### Total Light Output, 3500K, 80 CRI (Lumens) - 4' Luminaire

	↑S <sup>1</sup>	↑B <sup>1</sup>	↑H <sup>1</sup>	↑V <sup>2</sup>
↓S <sup>1</sup>	2960 (160%   40%↓)	3414 (165%   35%↓)	4546 (174%   26%↓)	5503 (178%   22%↓)
↓B <sup>1</sup>	3269 (154%   46%↓)	3722 (160%   40%↓)	4854 (169%   31%↓)	5811 (174%   26%↓)
↓H <sup>1</sup>	4039 (144%   56%↓)	4492 (149%   51%↓)	5625 (160%   40%↓)	6581 (165%   35%↓)
↓V <sup>2</sup>	4690 (138%   62%↓)	5143 (143%   57%↓)	6276 (153%   47%↓)	7232 (159%   41%↓)

### Light Output, 3500K, 80 CRI (Lumens Per Foot)

	↑S <sup>1</sup>	↑B <sup>1</sup>	↑H <sup>1</sup>	↑V <sup>2</sup>
↓S <sup>1</sup>	740	853	1137	1376
↓B <sup>1</sup>	817	930	1214	1453
↓H <sup>1</sup>	1123	1406	1645	1645
↓V <sup>2</sup>	1172	1286	1569	1808

### Power, 3500K (Watts Per Foot)

	↑S <sup>1</sup>	↑B <sup>1</sup>	↑H <sup>1</sup>	↑V <sup>2</sup>
↓S <sup>1</sup>	7.2	8.1	10.6	12.7
↓B <sup>1</sup>	8.1	9.1	11.6	13.7
↓H <sup>1</sup>	10.6	11.6	14.0	16.2
↓V <sup>2</sup>	12.7	13.7	16.2	18.3

### Efficacy, 3500K, 80 CRI (Lumens Per Watt)

	↑S <sup>1</sup>	↑B <sup>1</sup>	↑H <sup>1</sup>	↑V <sup>2</sup>
↓S <sup>1</sup>	103	105	107	108
↓B <sup>1</sup>	100	102	105	106
↓H <sup>1</sup>	95	97	100	102
↓V <sup>2</sup>	92	94	97	99

S - Standard Output, B - Boosted Standard Output, H - High Output, V - Very High Output

<sup>1</sup> Family Correlation based on 4' luminaire 3500K Very High Output (V) test - 120V.

<sup>2</sup> Based on ITL report: 90352

### Total Light Output, 3500K, 80 CRI (Lumens) - 4' Luminaire

	↑S <sup>1</sup>	↑B <sup>1</sup>	↑H <sup>1</sup>	↑V <sup>2</sup>
↓S <sup>1</sup>	3001 (155%   45%↓)	3424 (160%   40%↓)	4481 (170%   30%↓)	5374 (175%   25%↓)
↓B <sup>1</sup>	3349 (149%   51%↓)	3772 (155%   45%↓)	4830 (165%   35%↓)	5722 (170%   30%↓)
↓H <sup>1</sup>	4221 (139%   61%↓)	4644 (144%   56%↓)	5701 (155%   45%↓)	6594 (161%   39%↓)
↓V <sup>2</sup>	4957 (133%   67%↓)	5380 (138%   62%↓)	6437 (148%   52%↓)	7330 (155%   45%↓)

### Light Output, 3500K, 80 CRI (Lumens Per Foot)

	↑S <sup>1</sup>	↑B <sup>1</sup>	↑H <sup>1</sup>	↑V <sup>2</sup>
↓S <sup>1</sup>	750	856	1120	1343
↓B <sup>1</sup>	837	943	1207	1431
↓H <sup>1</sup>	1055	1161	1425	1649
↓V <sup>2</sup>	1239	1345	1609	1833

### Power, 3500K (Watts Per Foot)

	↑S <sup>1</sup>	↑B <sup>1</sup>	↑H <sup>1</sup>	↑V <sup>2</sup>
↓S <sup>1</sup>	7.1	8.1	10.5	12.6
↓B <sup>1</sup>	8.1	9.0	11.5	13.6
↓H <sup>1</sup>	10.5	11.5	13.9	16.0
↓V <sup>2</sup>	12.6	13.6	16.0	18.1

### Efficacy, 3500K, 80 CRI (Lumens Per Watt)

	↑S <sup>1</sup>	↑B <sup>1</sup>	↑H <sup>1</sup>	↑V <sup>2</sup>
↓S <sup>1</sup>	106	106	107	107
↓B <sup>1</sup>	104	105	105	105
↓H <sup>1</sup>	100	101	102	103
↓V <sup>2</sup>	98	99	100	101

S - Standard Output, B - Boosted Standard Output, H - High Output, V - Very High Output

<sup>1</sup> Family Correlation based on 4' luminaire 3500K Very High Output (V) test - 120V.

<sup>2</sup> Based on ITL report: 89456

Wattage is Real Power. If you would like additional details to calculate Apparent Power, please contact your local Finelite representative.

### Sample Lumen Adjustment Calculation

Lumen Adjustment Factors 80 CRI		Lumen Adjustment Factors 90 CRI	
3000K	0.985	3000K	0.746
3500K	1.000	3500K	0.760
4000K	1.032	4000K	0.789

High Output (H) / Standard Output (S), 4000K, 90 CRI  
**Lumen Adjustment Factor:** 0.789  
**Total Light Output:** 4265 lm x 0.789 = 3365 lm  
**Total Light Output per Foot:** 1066 lm/ft x 0.789 = 841 lm/ft.  
**watts/foot:** 10.7 W/ft.

$$\text{Efficacy} = \frac{841 \frac{\text{lm}}{\text{ft.}}}{10.57 \frac{\text{W}}{\text{ft.}}} = 78.6 \text{ lm/W}$$


Submitted by:		Date:
Type:	Project:	
Ordering Info:		

# High Performance 2" Aperture (HP-2) Wall Mount and Arm Mount

## Direct Photometry - 4' Luminaire 3500K


**HP2-P-D-V-835-F**  
**Downlight:** Flush Diffuser

**Efficacy:** 87 lm/W  
**Total luminaire output:** 3215 lumens (804 lm/ft)  
36.9 watts (9.2 W/ft)  
**Peak Candela Value:** 1334 @ 0°  
CRI: 80 / CCT: 3500K  
ITL LM79 Report 85136



**HP2-P RG-D-V-835-RG**  
**Downlight:** Regressed Diffuser

**Efficacy:** 79 lm/W  
**Total luminaire output:** 2887 lumens (722 lm/ft)  
36.7 watts (9.2 W/ft)  
**Peak Candela Value:** 1529 @ 0°  
CRI: 80 / CCT: 3500K  
ITL LM79 Report 90350



### Total Light Output, 3500K, 80 CRI (Lumens) - 4' Luminaire

S <sup>1</sup>	B <sup>1</sup>	H <sup>1</sup>	V <sup>2</sup>
1316	1655	2501	3215

### Light Output, 3500K, 80 CRI (Lumens Per Foot)

S <sup>1</sup>	B <sup>1</sup>	H <sup>1</sup>	V <sup>2</sup>
329	414	625	804

### Power, 3500K (Watts Per Foot)

S <sup>1</sup>	B <sup>1</sup>	H <sup>1</sup>	V <sup>2</sup>
3.6	4.6	7.1	9.2

### Efficacy, 3500K, 80 CRI (Lumens Per Watt)

S <sup>1</sup>	B <sup>1</sup>	H <sup>1</sup>	V <sup>2</sup>
91	90	88	87

S - Standard Output, B - Boosted Standard Output, H - High Output, V - Very High Output

<sup>1</sup> Family Correlation based on 4' luminaire 3500K Very High Output (V) test - 120V.

<sup>2</sup> Based on ITL report: 85136

### Total Light Output, 3500K, 80 CRI (Lumens) - 4' Luminaire

S <sup>1</sup>	B <sup>1</sup>	H <sup>1</sup>	V <sup>2</sup>
1182	1486	2245	2887

### Light Output, 3500K, 80 CRI (Lumens Per Foot)

S <sup>1</sup>	B <sup>1</sup>	H <sup>1</sup>	V <sup>2</sup>
295	371	561	722

### Power, 3500K (Watts Per Foot)

S <sup>1</sup>	B <sup>1</sup>	H <sup>1</sup>	V <sup>2</sup>
3.6	4.6	7.0	9.2

### Efficacy, 3500K, 80 CRI (Lumens Per Watt)

S <sup>1</sup>	B <sup>1</sup>	H <sup>1</sup>	V <sup>2</sup>
82	81	80	79

S - Standard Output, B - Boosted Standard Output, H - High Output, V - Very High Output

<sup>1</sup> Family Correlation based on 4' luminaire 3500K Very High Output (V) test - 120V.

<sup>2</sup> Based on ITL report: 90350

Wattage is Real Power. If you would like additional details to calculate Apparent Power, please contact your local Finelite representative.

### Sample Lumen Adjustment Calculation

Lumen Adjustment Factors 80 CRI	
3000K	0.985
3500K	1.000
4000K	1.032

Lumen Adjustment Factors 90 CRI	
3000K	0.746
3500K	0.760
4000K	0.789

High Output (H) / Standard Output (S), 4000K, 90 CRI  
**Lumen Adjustment Factor:** 0.789  
**Total Light Output:** 2546 lm x 0.789 = 2009 lm  
**Total Light Output per Foot:** 636 lm/ft x 0.789 = 502 lm/ft.  
**watts/foot:** 6.8 W/ft.

$$\text{Efficacy} = \frac{502 \frac{\text{lm}}{\text{ft.}}}{6.8 \frac{\text{W}}{\text{ft.}}} = 74 \text{ lm/W}$$


Submitted by:		Date:
Type:	Project:	
Ordering Info:		

# High Performance 2" Aperture (HP-2) Wall Mount and Arm Mount

## Indirect Photometry - 4' Luminaire 3500K


**HP2-P-I-V-835-F**  
**Uplight:** Flush Diffuser

**Efficacy:** 102 lm/W  
**Total luminaire output:** 3749 lumens (937 lm/ft)  
36.7 watts (9.2 W/ft)  
**Peak Candela Value:** 1448 @ 180°  
CRI: 80 / CCT: 3500K  
ITL LM79 Report 85134



**HP2-AM-WW-D-K-V-835**  
**Uplight:** Flush Diffuser

**Efficacy:** 77 lm/W  
**Total luminaire output:** 1500 lumens (375 lm/ft)  
19.6 watts (4.9 W/ft)  
**Peak Candela Value:** 882 @ 25°  
CRI: 80 / CCT: 3500K  
ITL LM79 Report 85137



### Total Light Output, 3500K, 80 CRI (Lumens) - 4' Luminaire

S <sup>1</sup>	B <sup>1</sup>	H <sup>1</sup>	V <sup>2</sup>
1535	1929	2916	3749

### Light Output, 3500K, 80 CRI (Lumens Per Foot)

S <sup>1</sup>	B <sup>1</sup>	H <sup>1</sup>	V <sup>2</sup>
384	482	729	937

### Power, 3500K (Watts Per Foot)

S <sup>1</sup>	B <sup>1</sup>	H <sup>1</sup>	V <sup>2</sup>
3.6	4.6	7.0	9.2

### Efficacy, 3500K, 80 CRI (Lumens Per Watt)

S <sup>1</sup>	B <sup>1</sup>	H <sup>1</sup>	V <sup>2</sup>
107	106	104	102

S - Standard Output, B - Boosted Standard Output, H - High Output, V - Very High Output

<sup>1</sup> Family Correlation based on 4' luminaire 3500K Very High Output (V) test - 120V.

<sup>2</sup> Based on ITL report: 85134

### Total Light Output, 3500K, 80 CRI (Lumens) - 4' Luminaire

S <sup>1</sup>	B <sup>1</sup>	H <sup>1</sup>	V <sup>2</sup>
614	772	1167	1500

### Light Output, 3500K, 80 CRI (Lumens Per Foot)

S <sup>1</sup>	B <sup>1</sup>	H <sup>1</sup>	V <sup>2</sup>
154	193	292	375

### Power, 3500K (Watts Per Foot)

S <sup>1</sup>	B <sup>1</sup>	H <sup>1</sup>	V <sup>2</sup>
2.0	2.5	3.8	4.9

### Efficacy, 3500K, 80 CRI (Lumens Per Watt)

S <sup>1</sup>	B <sup>1</sup>	H <sup>1</sup>	V <sup>2</sup>
76	77	77	77

S - Standard Output, B - Boosted Standard Output, H - High Output, V - Very High Output

<sup>1</sup> Family Correlation based on 4' luminaire 3500K Very High Output (V) test - 120V.

<sup>2</sup> Based on ITL report: 85137

Wattage is Real Power. If you would like additional details to calculate Apparent Power, please contact your local Finelite representative.

### Sample Lumen Adjustment Calculation

Lumen Adjustment Factors 80 CRI	
3000K	0.985
3500K	1.000
4000K	1.032

Lumen Adjustment Factors 90 CRI	
3000K	0.746
3500K	0.760
4000K	0.789

High Output (H) / Standard Output (S), 4000K, 90 CRI  
**Lumen Adjustment Factor:** 0.789  
**Total Light Output:** 2245 lm x 0.789 = 1771 lm  
**Total Light Output per Foot:** 561 lm/ft x 0.789 = 443 lm/ft.  
**watts/foot:** 7.0 W/ft.

$$\text{Efficacy} = \frac{443 \frac{\text{lm}}{\text{ft.}}}{7.0 \frac{\text{W}}{\text{ft.}}} = 63 \text{ lm/W}$$

Submitted by:		Date:
Type:	Project:	
Ordering Info:		

# High Performance 2" Aperture (HP-2) Wall Mount and Arm Mount



## Wall Wash Direct - Setback Info and Application Data

**HP2-AM-WW-D-K-4'-V-835**

**Downlight:** With Kicker

**Total luminaire output:** 935 lumens (234 lm/ft)  
10.2 watts (2.6 W/ft)

CRI: 80 / CCT: 3500K

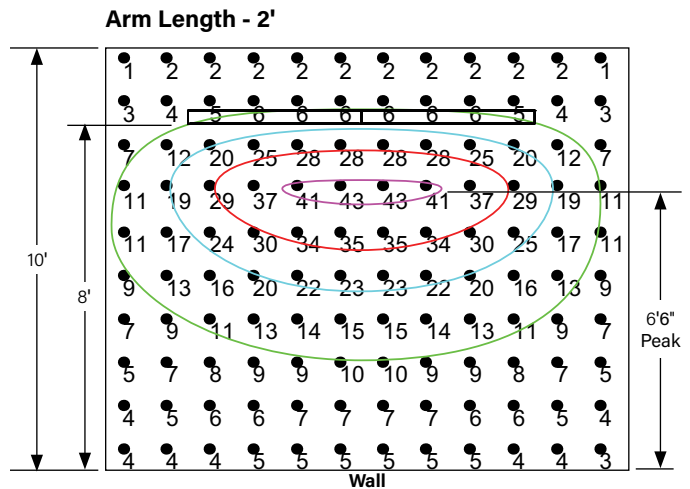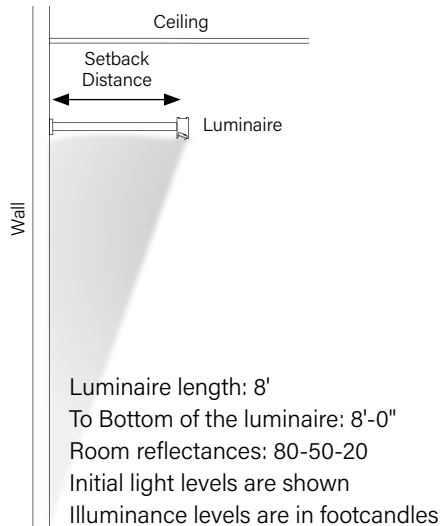



## Downlight Asymmetric Optic - Setback Info and Application Data

**HP2-AM-D-4ft-V-835-DAO**

**Downlight:** DAO

**Total luminaire output:** 3742 lumens (936 lm/ft)  
35.6 watts (8.9 W/ft)

CRI: 80 / CCT: 3500K

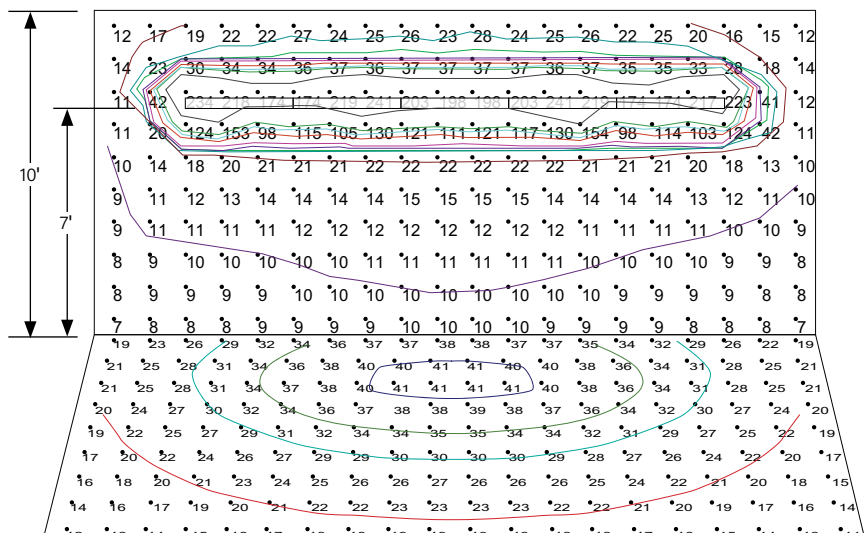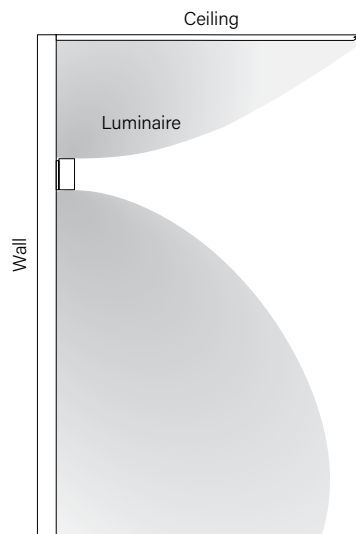

Submitted by:		Date:
Type:	Project:	
Ordering Info:		

# 0-10V Tunable White

Finelite's award-winning, contractor friendly Tunable White luminaires are available at low cost, with powerful and simple 0-10V tuning and intensity controls.

## TUNABLE WHITE FEATURES

- CCT range: 2700K - 6500K
- Dimming Range: 100% to 10%
- CRI Options: 80 CRI or 90 CRI

## PHOTOMETRY

Apply a power adjustment factor to calculate wattage usage


POWER	CONVERSION FACTOR
	<b>1.1X</b>

(Example: a 50 watt luminaire in static white would draw 55 watts using 0-10V Tunable White)

## LUMINAIRE FAMILY MODIFICATIONS/RESTRICTIONS

Wall Mount Direct	Section Lengths											
	2'	3'	4'	5'	6'	7'	8'	9'	10'	11'	12'	
Output S,B,H,V Single Circuit	Rows can be comprised of 2'-12' sections. Tailored lengths available.											
Integral Battery Backup (BSL310LP)							✓		✓		✓	
Wall Mount Indirect/Direct												
Output S,B Single Circuit	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Integral Battery Backup (BSL310LP)							✓		✓		✓	
Output H,V Single Circuit			✓				✓				✓	
Integral Battery Not Available	Remote Battery backup solution available. Consult factory for tailored lighting options.											
Output S,B,H,V Dual Circuit			✓				✓				✓	
Integral Battery Not Available	Remote Battery backup solution available. Consult factory for tailored lighting options.											

## WIRING DIAGRAM - DIMMABLE TO 10%

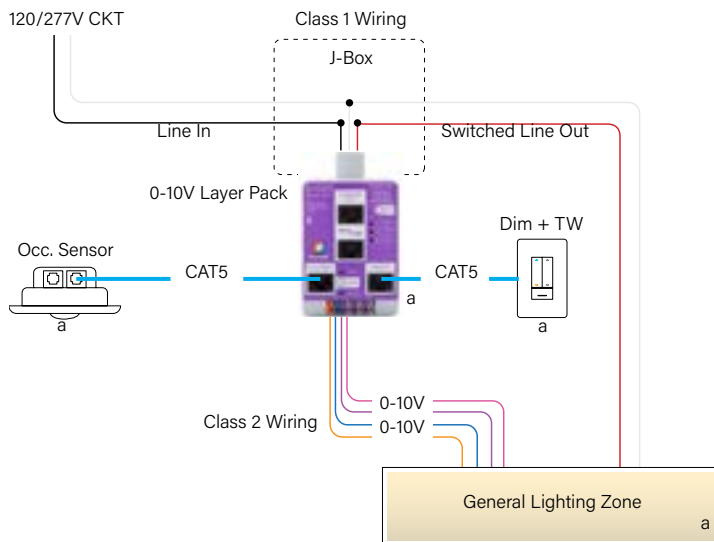


Luminaire Wiring

- **Purple (+) / Pink (-)** control wires are for intensity control
- **Orange (+) / Blue (-)** control wires are for Tunable White control


**Note:**

Load or Dim to Off options available.

## DUAL FEED DETAIL



WIRING LEGEND		
<b>Black</b>	Hot	Line Voltage
<b>White</b>	Neutral	Line Voltage
<b>Green</b>	Ground	



WIRING LEGEND		
<b>Pink</b>	Dimming	0-10V DC
<b>Purple</b>	Dimming	0-10V DC
<b>Orange</b>	TW	0-10V DC
<b>Blue</b>	TW	0-10V DC

