



# E3

## Elements of Design

Slim Accent Luminaire


# E3

A slim LED accent luminaire delivering excellent illumination of vertical surfaces for interior applications. Advanced LED module design makes E3 a powerful solution for highlighting your best vertical features efficiently. Distribution and efficiency make E3 a strong luminaire selection for use in Task Vertical Ambient design schemes.


This product is enrolled in the International Living Future Institute (ILFI) Declare 2.0 Program and is third-party verified with options achieving Red List Approved and Declared status.




# Features




**Two Mounting Styles**  
Pendant and arm mount

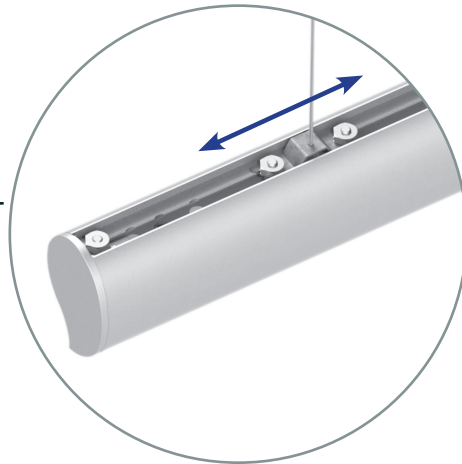


**Adjustable Mounting**  
Mounting points are adjustable along the length of the luminaire making it easy to mount where desired

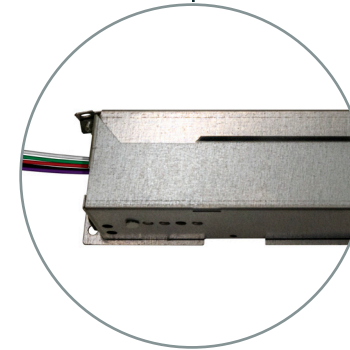


**Remote Power Source**  
Allows for narrow extrusion and greater wall illumination

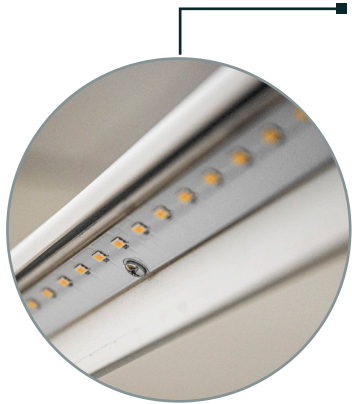

**LED Array**  
LED array provides consistent wall wash light

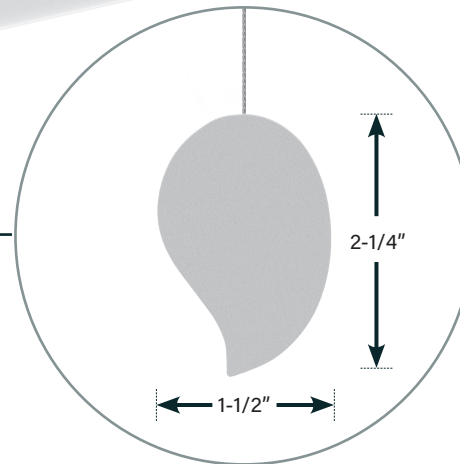

**Teardrop Aesthetic**  
Elegant inverted teardrop shape adds character to the environment

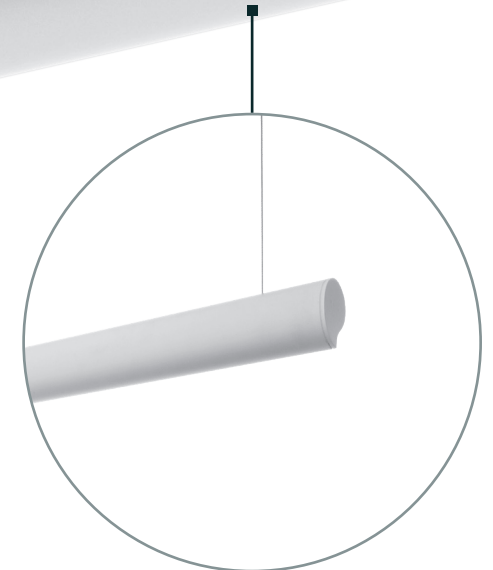

**Standard Length Options**  
Highlight wall and vertical features with 2', 4', 6', and 8' luminaire lengths

## Vertical Lighting




*E3 is a sleek elegant luminaire – it creates visual interest and is an integral part of a Task, Vertical, Ambient (TVA) design scheme. TVA uses 3 distinct layers of light to:*

- Create a balance of task appropriate illumination
- Light vertical elements to provide interest and comfort
- Provide a proper amount of ambient illumination to maximize lighting efficiency

# Performance


## Cross Section

### Direct Pendant



Flush Downlight Diffuser (standard)

### Direct Arm Mount



Flush Downlight Diffuser (standard)

## Photometry

### Wall Wash Photometry - 4' Luminaire 3500K

#### E3-P-WW-D-4'-V-835


**Efficacy:** 109 lm/W

**Total luminaire output:** 2129 lumens  
19.5 watts

**Peak Candela Value:** 898 @ 45°

CRI: 80 / CCT: 3500K

ITL LM79 Report 93801



CANDELA DISTRIBUTION						
	0.0	45.0	90.0	135.0	180.0	FLUX
0	264	264	264	264	264	
5	376	340	265	196	169	26
15	611	497	258	86	47	84
25	795	627	243	29	4	150
35	887	699	217	2	1	213
45	898	703	179	0	0	256
55	870	655	133	0	0	272
65	813	579	85	0	0	266
75	730	491	42	0	0	239
85	619	398	12	0	0	200
90	559	354	0	0	0	
95	494	309	0	0	0	155
105	376	231	0	0	0	112
115	284	165	0	0	0	76
125	204	109	0	0	0	47
135	132	51	0	0	0	24
145	59	21	0	0	0	9
155	22	9	0	0	0	2
165	7	1	0	0	0	0
175	0	0	0	0	0	0
180	0	0	0	0	0	

Total Light Output, 3500K, 80 CRI (Lumens) - 4' Luminaire				
S <sup>1</sup>	B <sup>1</sup>	H <sup>1</sup>	V <sup>2</sup>	
872	1096	1656	2129	

Light Output, 3500K, 80 CRI (Lumens Per Foot)				
S <sup>1</sup>	B <sup>1</sup>	H <sup>1</sup>	V <sup>2</sup>	
218	274	414	532	

Power, 3500K, 80 CRI (Watts Per Foot)				
S <sup>1</sup>	B <sup>1</sup>	H <sup>1</sup>	V <sup>2</sup>	
1.9	2.4	3.7	4.9	

Efficacy, 3500K, 80 CRI (Lumens Per Watt)				
S <sup>1</sup>	B <sup>1</sup>	H <sup>1</sup>	V <sup>2</sup>	
114	113	111	109	



S - Standard Output, B - Boosted Standard Output, H - High Output, V - Very High Output

<sup>1</sup> Based on 4' luminaire 3500K Very High Output (V) test - 120V

<sup>2</sup> Based on ITL report: 93801

## Application

Average	Max	Min	Avg/Min	Max/Min
27.9	123	5	5.59	24.60

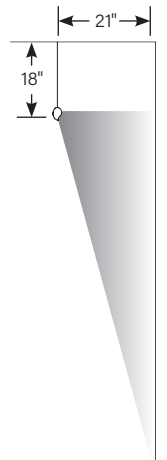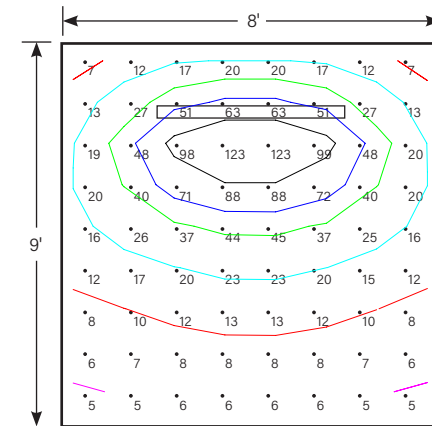

# **FINELITE<sup>®</sup>**

---

## *Better Lighting*

### **The Finelite LED Difference**



10-year performance-based warranty



Dimming standard



Replaceable LED light arrays

### **Finelite Commitment To You**



Ships in 10 working days for standard orders



Focus on sustainability