



E3

Elements of Design

Slim Accent Luminaire



A Slim LED Accent Luminaire

A slim LED accent luminaire delivering excellent illumination of vertical surfaces for interior applications. Advanced LED module design makes E3 a powerful solution for highlighting your best vertical features efficiently. Distribution and efficiency make E3 a strong luminaire selection for use in Task Vertical Ambient design schemes.

This product is enrolled in the International Living Future Institute (ILFI) Declare 2.0 Program and is third-party verified with options achieving Red List Approved and Declared status.



Lengths

2', 4', 6', and 8' independent luminaires

Note: Runs not available

Tailored Control

Dimming from 100% to 10% standard;
1% available at no charge*

Industry-leading, pre-qualified drivers and
controls tailored to meet project needs

* 0-10v

Tailored Color

Static White light options at 3000K, 3500K,
and 4000K CCT

80+ and 90+ CRI available

Tailored Output

Static and 0-10V

- Standard (S)
- Boosted Standard (B)
- High (H)
- Very High (V)


Note: Specify lm/ft of outputs between Standard (S) and Very High (V). Consult factory for tailored lumen output outside of this range.

Performance

105.9 Lumens per watt at 277V


109.2 Lumens per watt at 120V

E3

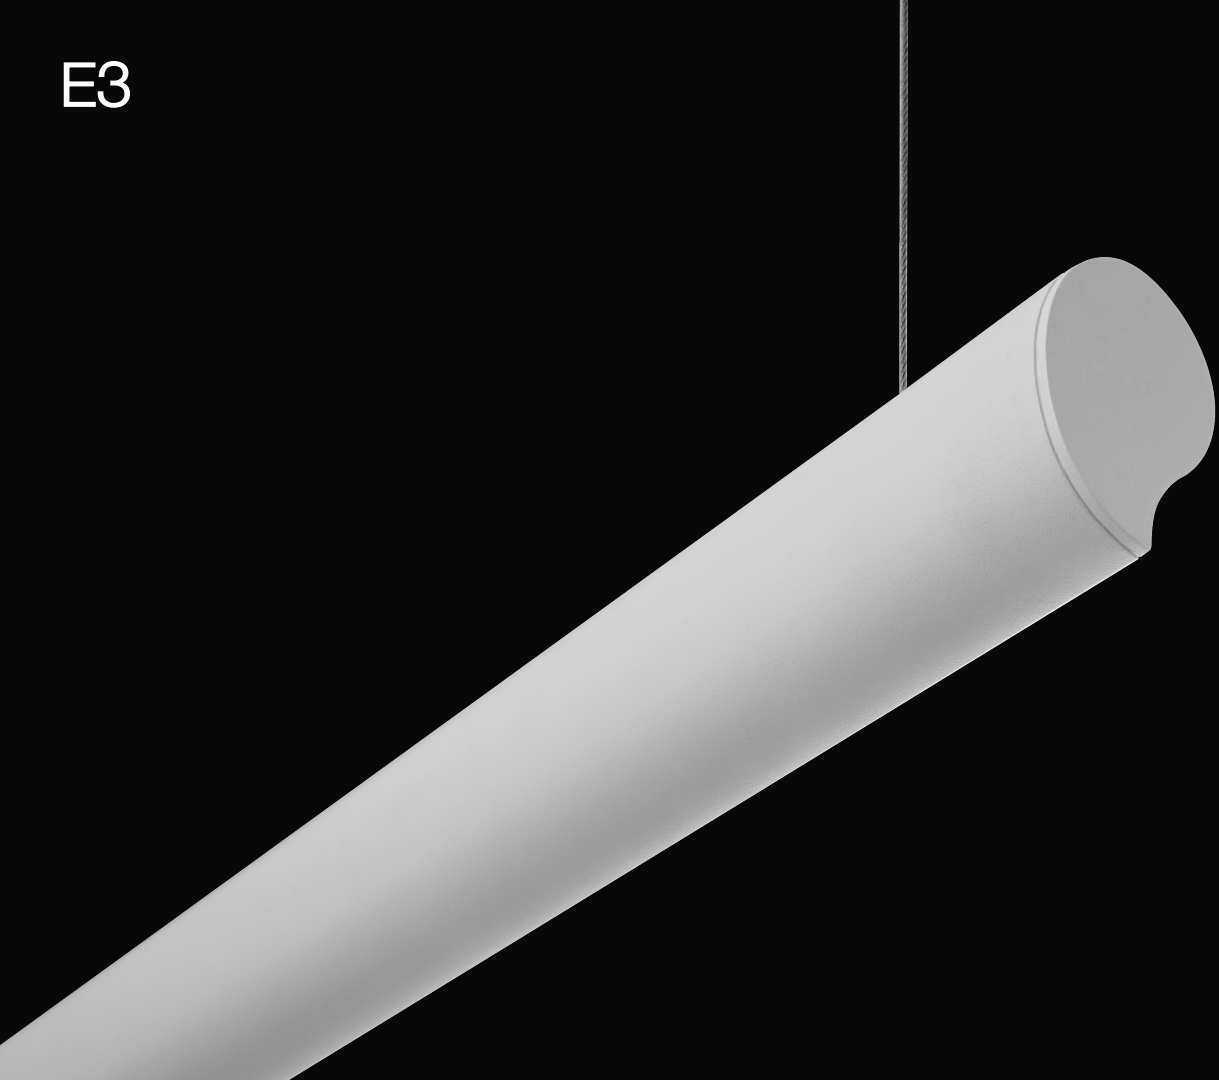

Pendant shown

Features

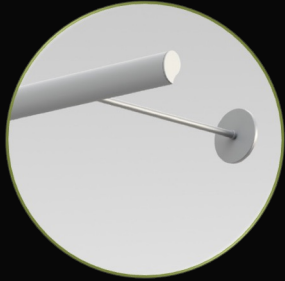


Two Mounting Styles
Pendant and arm mount.




Teardrop Aesthetic
Elegant inverted teardrop shape adds character to the environment.



Adjustable Mounting
Mounting points are adjustable along the length of the luminaire making it easy to mount where desired.



LED Array
LED array provides consistent wall wash light.



Remote Power Source
Allows for narrow extrusion and greater wall illumination.

Performance

Wall Wash Photometry

4' Luminaire 3500k

E3-P-WW-D-4'-V-835


Efficacy: 109 lm/W

Total luminaire output: 872 lumens
19.5 watts

Peak Candela Value: 898 @ 45°

CRI: 80 / CCT: 3500K

ITL LM79 Report 93801

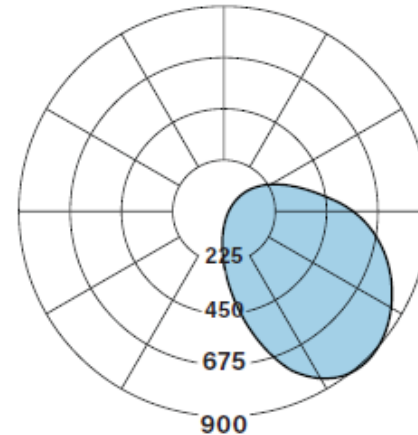

Application

Application

4' Luminaire 3500k


Total luminaire output: 2129 lumens

Luminaire length: 4'

To bottom of the luminaire: 7'-6"


Room reflectances: 80-50-20

Maintained illuminance levels: LLF 1.00"

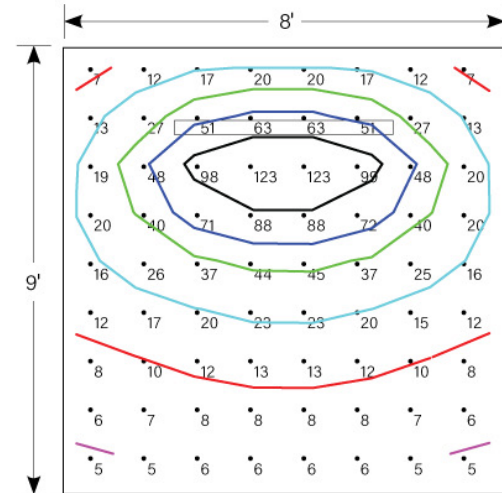


Cross Sections

Direct Pendant

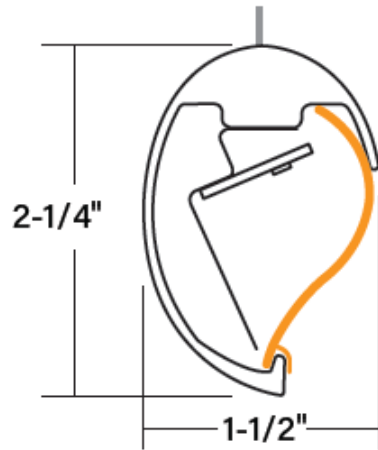

Flush Downlight Diffuser
(standard)

Direct Arm Mount

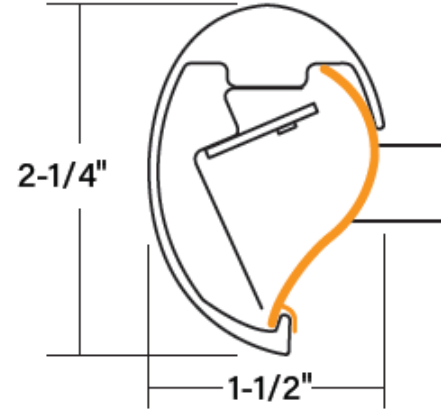

Flush Downlight Diffuser
(standard)

The Finelite LED Difference & Commitment to You



10-Year performance-based warranty



10-Day Shipping



Dimming 100%-10% standard



Replaceable LEDs



Focus on sustainability