



HPR-SL

High Performance Recessed
Streamline

FINELITE[®]
Better Lighting

Finelite, Inc. • 30500 Whipple Road • Union City • CA 94587-1530 • P: 510-441-1100 • www.finelite.com © 2024 FINELITE, INC. ALL RIGHTS RESERVED.
Due to continuing product improvements, Finelite reserves the right to change specifications without notice. Please visit www.finelite.com for the most current data.

A brand of **legrand**

High Performance Recessed - Streamline (HPR-SL) LED Collection

HPR-SL is a recessed luminaire delivering excellent visual comfort and outstanding performance. Advanced optical design makes this luminaire a compelling solution for any application.

Features

Tailored Output

Optimizing lighting levels to accommodate architectural design elements and code requirements.

- Standard (**S**)
- Boosted Standard (**B**)
- High (**H**)
- Very High (**V**)

Features

Tailored Color

Adjust intensity to the preferences of the people in the space.

- Static White options at 3000K, 3500K, and 4000K CCT
- 80+ and 90+ CRI options available

Features

Tailored Control

Dim and tune the lighting to fit user preference.

- Dimming from 100% to 10%, standard; 1% available
- Industry-leading pre-qualified drivers and controls options available
- Integrated or networked daylight and occupancy sensors options available




HPR-SL

Sizes



2' x 2'

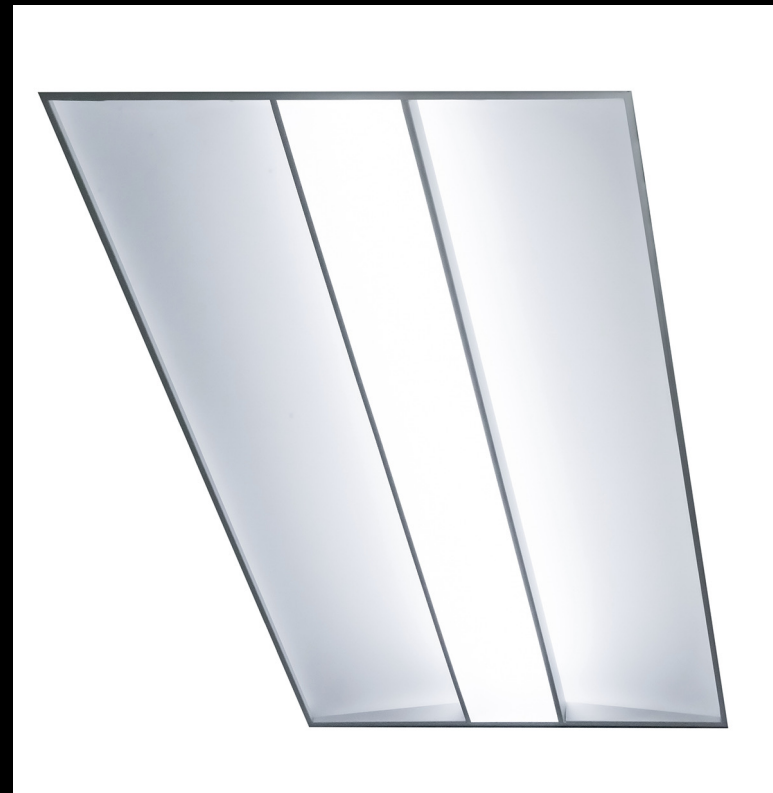

2' x 4'



1' x 4'

Performance

HPR-SL

Recessed

HPR-SL-2x4-V-835

Efficacy: 155 lm/W

Total luminaire output: 6832 lumens
45.7 watts



Peak Candela Value: 2366 @ 0°

CRI: 80 / CCT: 3500K

LM79 Report 5155




Note

- For complete photometric data please see technical sheet.
- For Tunable White data please see Tunable White technical sheet.

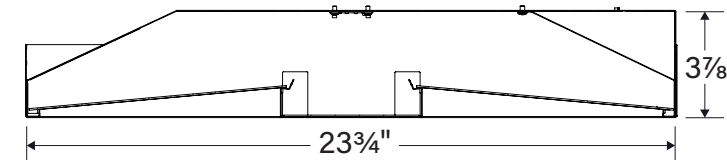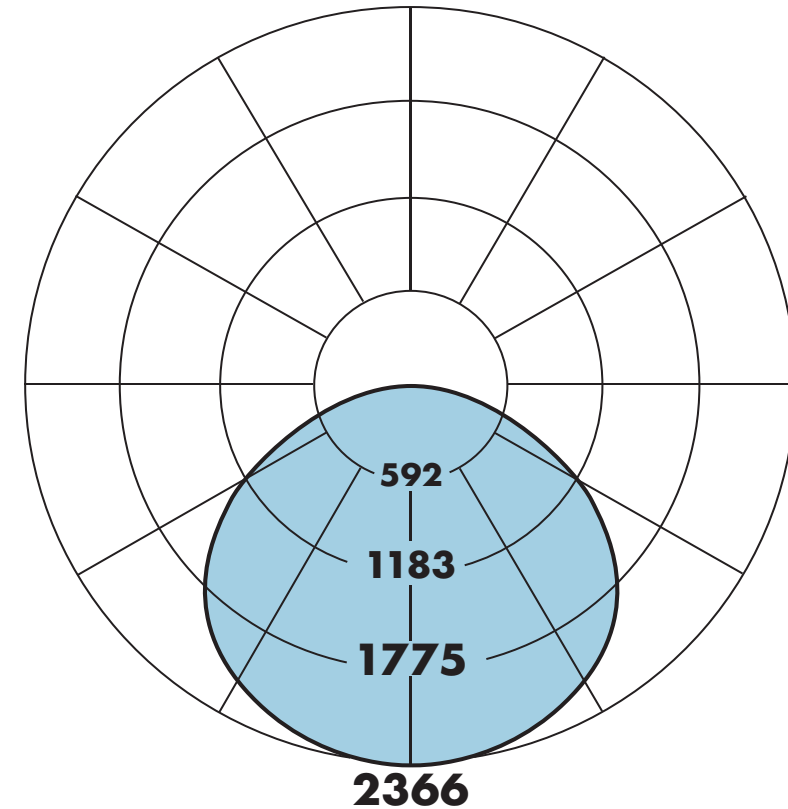

Cross Sections

C1 C2 Ceiling Types

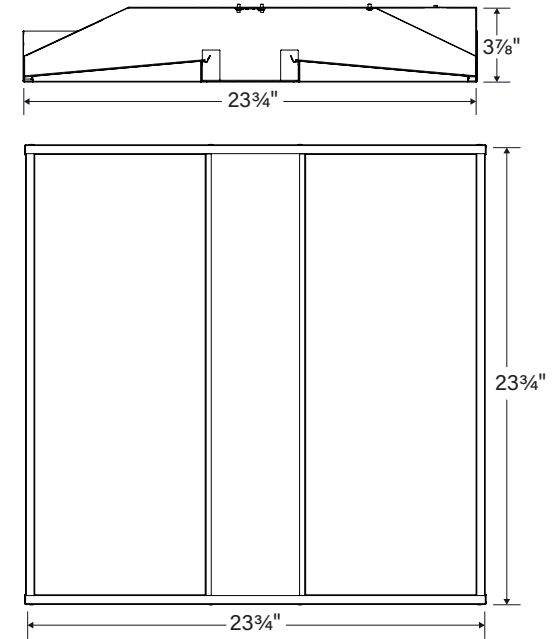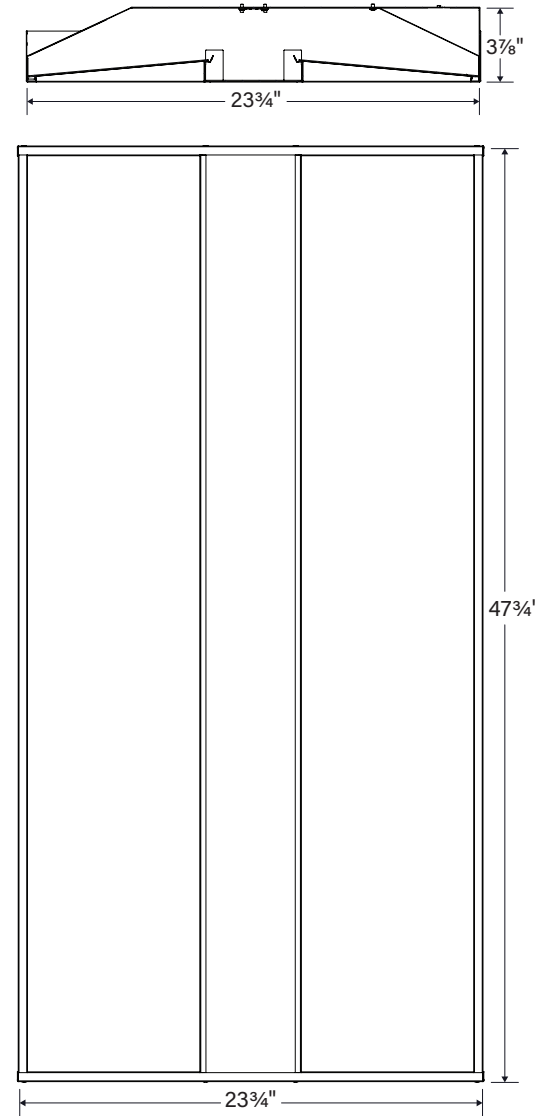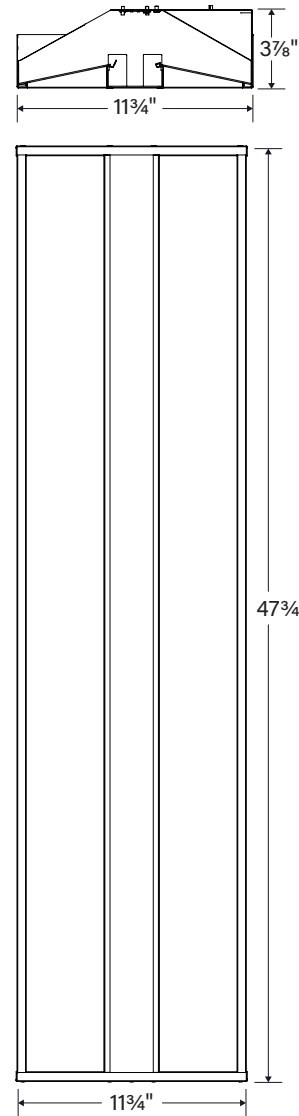

Cross Sections

C2T C3 DW Ceiling Types

