



Product Photometry and ies files are also available online at [www.finelite.com](http://www.finelite.com).  
For layouts or additional photometry, contact your local representative or the factory.

### S17 - ACF - P - 1T8 - OPEN - 96W LSI REPORT 24221



72% Uplight  
28% Downlight

EFFICIENCY = 75.5%



CANDELA DISTRIBUTION					FLUX
0.0	22.5	45.0	67.5	90.0	
0	92	92	92	92	5
5	92	99	97	94	99
15	88	114	106	96	115
25	79	132	113	94	138
35	67	151	123	89	162
45	54	165	129	80	178
55	40	173	129	72	188
65	28	173	124	60	189
75	16	164	113	46	183
85	3	147	96	31	167
90	0	136	86	24	156
95	18	123	75	19	142
105	107	101	73	89	116
115	213	137	153	224	141
125	320	240	285	372	229
135	418	385	442	465	367
145	503	544	579	542	527
155	572	640	624	603	648
165	619	664	658	634	666
175	644	656	653	647	658
180	651	651	651	651	651




LEGEND:  
0-deg - - - - -  
45-deg - - - - -  
90-deg - - - - -

ZONAL LUMEN SUMMARY


ZONE	LUMENS	%LAMP	%FIXT
0-30	101	3.27	4.33
0-40	191	6.19	8.20
0-60	389	12.56	16.63
0-90	661	21.32	28.23
40-90	469	15.13	20.03
60-90	271	8.76	11.60
90-180	1680	54.21	71.77
0-180	2341	75.53	100.00

### S17 - VCF - P - 1T8 - OPEN - 96W LSI REPORT 23967



48% Uplight  
52% Downlight

EFFICIENCY = 71.6%



CANDELA DISTRIBUTION					FLUX
0.0	22.5	45.0	67.5	90.0	
0	471	471	471	471	23
5	471	467	468	469	474
15	454	449	462	452	470
25	419	355	392	428	337
35	369	228	295	362	186
45	307	143	173	278	119
55	235	127	113	180	116
65	155	107	95	80	116
75	74	87	67	51	115
85	4	93	62	20	120
90	0	98	66	22	123
95	1	99	67	24	126
105	67	99	78	52	122
115	149	118	101	65	117
125	231	133	113	138	117
135	306	137	139	237	115
145	371	182	240	320	127
155	422	302	342	387	237
165	458	398	415	446	374
175	476	466	468	471	483
180	478	478	478	478	478



LEGEND:  
0-deg - - - - -  
45-deg - - - - -  
90-deg - - - - -

ZONAL LUMEN SUMMARY


ZONE	LUMENS	%LAMP	%FIXT
0-30	349	12.05	16.83
0-40	531	18.34	25.62
0-60	825	28.46	39.75
0-90	1071	36.93	51.59
40-90	539	18.59	25.97
60-90	245	8.48	11.84
90-180	1004	34.65	48.41
0-180	2075	71.58	100.00

### S17 - ACF - S - 1T8 - OPEN - 96W LSI REPORT 23966



83% Uplight  
17% Downlight

EFFICIENCY = 64.1%



CANDELA DISTRIBUTION					FLUX
0.0	22.5	45.0	67.5	90.0	
0	43	43	43	43	43
5	43	44	44	43	35
15	41	55	43	42	18
25	39	104	74	40	3
35	35	118	109	51	2
45	30	53	90	68	0
55	24	60	39	76	0
65	17	64	53	34	0
75	10	51	47	31	0
85	0	34	29	20	0
90	0	31	23	10	0
95	18	40	30	14	0
105	114	52	55	81	4
115	221	108	133	189	68
125	326	202	244	309	182
135	421	326	367	403	332
145	503	450	474	489	486
155	568	538	543	561	589
165	613	598	603	611	620
175	637	633	631	631	629
180	632	632	632	632	632




LEGEND:  
0-deg - - - - -  
45-deg - - - - -  
90-deg - - - - -

ZONAL LUMEN SUMMARY


ZONE	LUMENS	%LAMP	%FIXT
0-30	52	1.81	2.82
0-40	105	3.65	5.70
0-60	204	7.06	11.03
0-90	322	11.14	17.38
40-90	216	7.48	11.68
60-90	118	4.07	6.36
90-180	1534	52.93	82.62
0-180	1857	64.06	100.00

### S17 - VCF - P - 1T8 - OPEN - 96W LSI REPORT 24222



51% Uplight  
49% Downlight

EFFICIENCY = 73.9%



CANDELA DISTRIBUTION					FLUX
0.0	22.5	45.0	67.5	90.0	
0	513	513	513	513	25
5	514	520	514	506	521
15	495	541	560	511	529
25	457	384	450	515	359
35	402	216	306	433	178
45	334	81	153	314	66
55	255	36	54	193	33
65	169	18	23	68	16
75	84	3	7	14	9
85	14	0	0	0	1
90	13	0	0	0	1
95	13	0	0	0	1
105	78	0	0	2	6
115	160	3	4	56	3
125	245	6	32	179	5
135	322	58	145	300	40
145	389	202	293	417	167
155	443	369	437	503	342
165	481	522	548	506	508
175	500	520	515	504	521
180	505	505	505	505	505




LEGEND:  
0-deg - - - - -  
45-deg - - - - -  
90-deg - - - - -

ZONAL LUMEN SUMMARY


ZONE	LUMENS	%LAMP	%FIXT
0-30	398	12.85	17.40
0-40	610	19.69	26.66
0-60	922	29.75	40.28
0-90	1114	35.96	48.69
40-90	504	16.27	22.03
60-90	192	6.20	8.40
90-180	1174	37.90	51.31
0-180	2289	73.85	100.00

### S17 - ACF - P - 1T5 - OPEN - 96W LSI REPORT 24223



75% Uplight  
25% Downlight

EFFICIENCY = 80.9%



CANDELA DISTRIBUTION					FLUX
0.0	22.5	45.0	67.5	90.0	
0	74	74	74	74	4
5	73	78	77	75	78
15	70	90	84	76	92
25	63	106	90	75	111
35	54	124	99	70	131
45	44	135	105	64	146
55	33	142	105	59	156
65	25	142	102	49	158
75	15	134	93	38	151
85	3	121	79	26	137
90	0	113	71	20	128
95	20	104	63	16	119
105	115	86	65	88	97
115	217	123	138	250	124
125	312	228	298	358	212
135	397	407	487	432	319
145	470	580	540	490	580
155	529	594	573	541	602
165	570	600	592	574	604
175	592	597	598	594	597
180	601	601	601	601	601




LEGEND:  
0-deg - - - - -  
45-deg - - - - -  
90-deg - - - - -

ZONAL LUMEN SUMMARY


ZONE	LUMENS	%LAMP	%FIXT
0-30	88	3.37	4.17
0-40	158	6.06	7.49
0-60	323	12.41	15.35
0-90	536	20.54	25.39
40-90	377	14.48	17.90
60-90	212	8.12	10.04
90-180	1574	60.34	74.61
0-180	2110	80.88	100.00

### S17 - VCF - P - 1T5 - OPEN - 96W LSI REPORT 24225



50% Uplight  
50% Downlight

EFFICIENCY = 82.4%



CANDELA DISTRIBUTION					FLUX
0.0	22.5	45.0	67.5	90.0	
0	398	398	398	398	398
5	397	415	408	400	416
15	382	490	453	409	500
25	354	373	446	414	342
35	313	215	284	411	195
45	263	127	166	305	120
55	205	99	91	173	105
65	140	95	71	80	103
75	73	90	62	30	101
85	11	91	58	17	105
90	0	90	57	16	103
95	10	88	56	16	101
105	64	84	54	18	96
115	125	78	51	65	88
125	185	66	67	159	77
135	239	99	148	280	90
145	286	193	269	367	174
155	324	349	413	376	319
165	351	445	416	373	453
175	365	383	378	370	384
180	368	368	368	368	368



LEGEND:  
0-deg - - - - -  
45-deg - - - - -  
90-deg - - - - -

ZONAL LUMEN SUMMARY

ZONE	LUMENS	%LAMP	%FIXT
0-30	342	13.12	15.92
0-40	527	20.23	24.55
0-60	828	31.76	38.55


Product Photometry and ies files are also available online at [www.finelite.com](http://www.finelite.com).  
For layouts or additional photometry, contact your local representative or the factory.

### S17 - ACF - S - 1T5 - OPEN - 96W LSI REPORT 24224



85% Uplight  
15% Downlight

EFFICIENCY = 68.9%

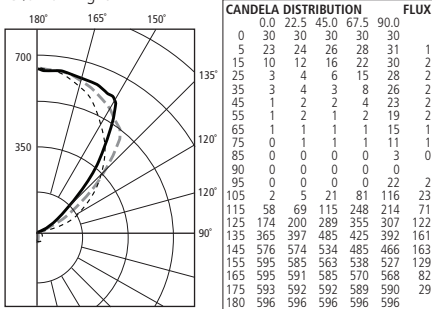


ZONAL LUMEN SUMMARY

ZONE	LUMENS	%LAMP	%FIXT
0-30	49	1.90	2.76
0-40	88	3.39	4.92
0-60	166	6.38	9.26
0-90	263	10.09	14.66
40-90	174	6.70	9.73
60-90	96	3.71	5.39
90-180	1533	58.77	85.34
0-180	1797	68.87	100.00


LEGEND:  
0-deg. - - - - -  
45-deg. - - - - -  
90-deg. - - - - -

### S17 - VCF - S - 1T5 - OPEN - 96W LSI REPORT 24226



50% Uplight  
50% Downlight

EFFICIENCY = 74.4%

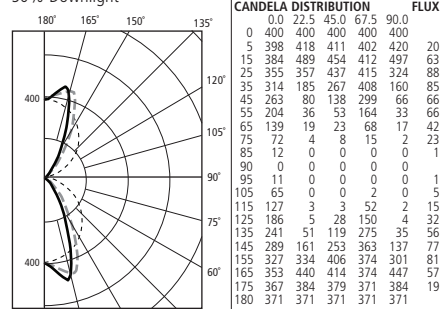


ZONAL LUMEN SUMMARY

ZONE	LUMENS	%LAMP	%FIXT
0-30	341	13.09	17.60
0-40	522	20.03	26.92
0-60	793	30.41	40.88
0-90	966	37.01	49.75
40-90	443	16.99	22.83
60-90	172	6.60	8.87
90-180	975	37.38	50.25
0-180	1941	74.39	100.00


LEGEND:  
0-deg. - - - - -  
45-deg. - - - - -  
90-deg. - - - - -

### S17 - ACF - P - 1TH50 - OPEN - 96W LSI REPORT 24227



74% Uplight  
26% Downlight

EFFICIENCY = 76.7%

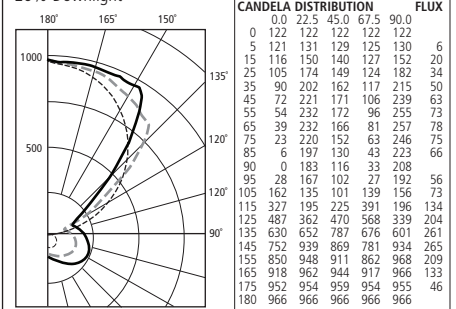


ZONAL LUMEN SUMMARY

ZONE	LUMENS	%LAMP	%FIXT
0-30	149	3.32	4.32
0-40	267	5.95	7.76
0-60	539	11.98	15.62
0-90	887	19.71	25.71
40-90	619	13.76	17.95
60-90	347	7.73	10.08
90-180	2563	56.97	74.29
0-180	3450	76.68	100.00


LEGEND:  
0-deg. - - - - -  
45-deg. - - - - -  
90-deg. - - - - -

### S17 - VCF - P - 1TH50 - OPEN - 96W LSI REPORT 24229



51% Uplight  
49% Downlight

EFFICIENCY = 84.0%

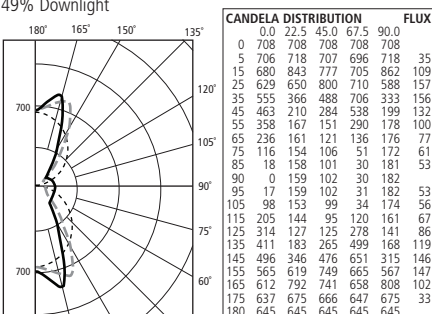


ZONAL LUMEN SUMMARY

ZONE	LUMENS	%LAMP	%FIXT
0-30	598	13.31	15.85
0-40	918	20.40	24.30
0-60	1437	31.94	38.04
0-90	1857	41.27	49.16
40-90	939	20.87	24.86
60-90	419	9.33	11.12
90-180	1920	42.68	50.84
0-180	3777	83.95	100.00


LEGEND:  
0-deg. - - - - -  
45-deg. - - - - -  
90-deg. - - - - -

### S17 - ACF - S - 1TH50 - OPEN - 96W LSI REPORT 24228



85% Uplight  
15% Downlight

EFFICIENCY = 64.3%

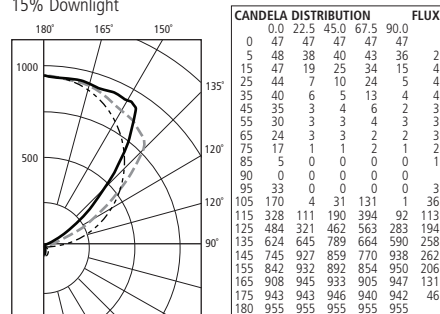

ZONAL LUMEN SUMMARY

ZONE	LUMENS	%LAMP	%FIXT
0-30	83	1.86	2.89
0-40	148	3.31	5.14
0-60	274	6.11	9.50
0-90	423	9.40	14.63
40-90	274	6.10	9.49