


FINELITE
Better Lighting

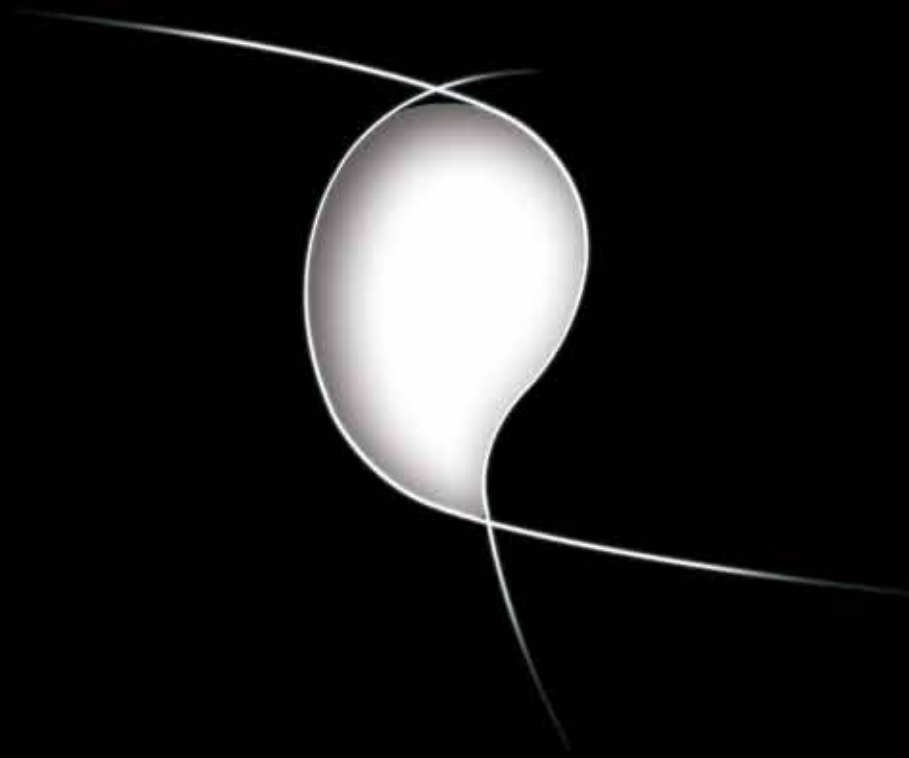

Muro
Breakthrough LED Performance

Muro

Breakthrough LED Performance

LED T8

LED T8 Vertical Illumination

Muro is the first luminaire to use high performance energy efficient LED T8 lamp technology. Clean, beautiful extruded aluminum forms position the LED T8 light engine to deliver vertical illumination for interior applications.

Innovative Features


- 1296 lumens at only 22.6 watts
- 40,000 hour LED T8 light engine and driver life
- Field replaceable OSRAM SYLVANIA™ LED T8 light engine
- 2', 4', 8' section lengths can be joined to form longer runs
- Pendant & wall mount options
- Adjustable pendant mounting for varying ceiling grids




Shape Options

The same great performance is available in three ultra-sleek profiles: Oval, Circle, and Square.


(Actual size shown here)

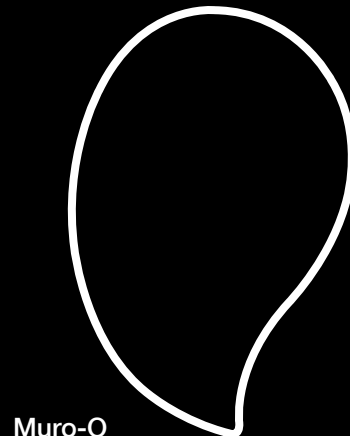


Muro-O

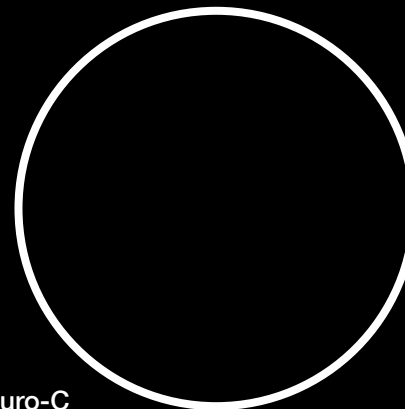

Muro-C



Muro-S

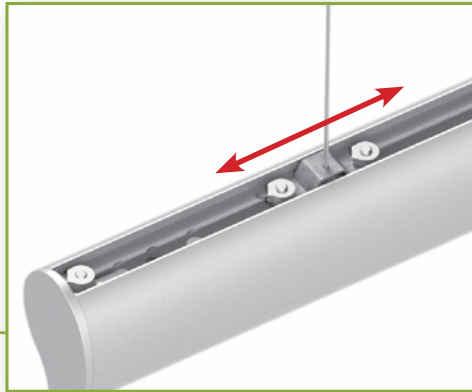


Adjustable Mounting

Mounting points are adjustable along the length of the luminaire making it easy to mount Muro right where you want it.

LED T8 Performance

OSRAM SYLVANIA™ LED T8 lamp technology delivers 1675 lumens at just 22 watts in the 4' length. The LED lamp includes internal drivers and light engines delivering uniform 120° light distribution.

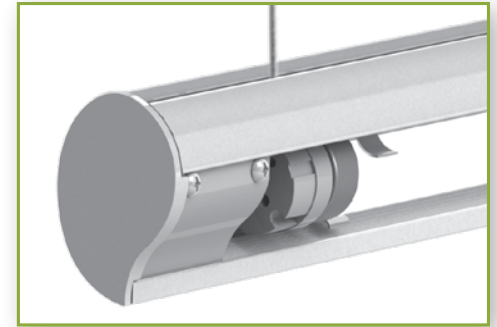

Mounting Options

Joining Fixtures



Pendant




Wall Mount



Muro can be easily joined to form runs.


Photometry

Muro-Oval
 57.3 Lumens Per Watt
 1296 Lumens/22.6 Watts
 CRI: 87
 CCT: 4100K
 ITL Report: 69522

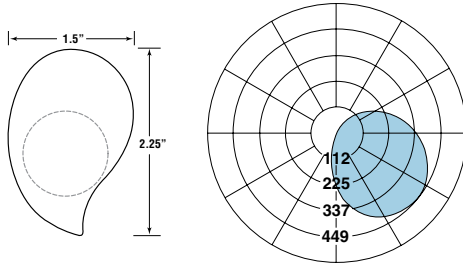

Candlepower Summary						
	0	45.0	90.0	135.0	180.0	Flux
0	235	235	235	235	235	
5	282	271	235	194	174	22
15	346	314	226	122	81	62
25	396	343	208	52	5	93
35	429	356	183	2	0	119
45	446	356	153	0	0	140
55	449	344	117	0	0	151
65	435	320	76	0	0	152
75	403	285	36	0	0	141
85	364	243	5	0	0	122
90	344	224	0	0	0	
95	323	205	0	0	0	101
105	270	163	0	0	0	78
115	216	124	0	0	0	56
125	161	83	0	0	0	35
135	104	45	0	0	0	18
145	52	15	0	0	0	7
155	9	0	0	0	0	1
165	0	0	0	0	0	0
175	0	0	0	0	0	0
180	0	0	0	0	0	0

Photometric Performance

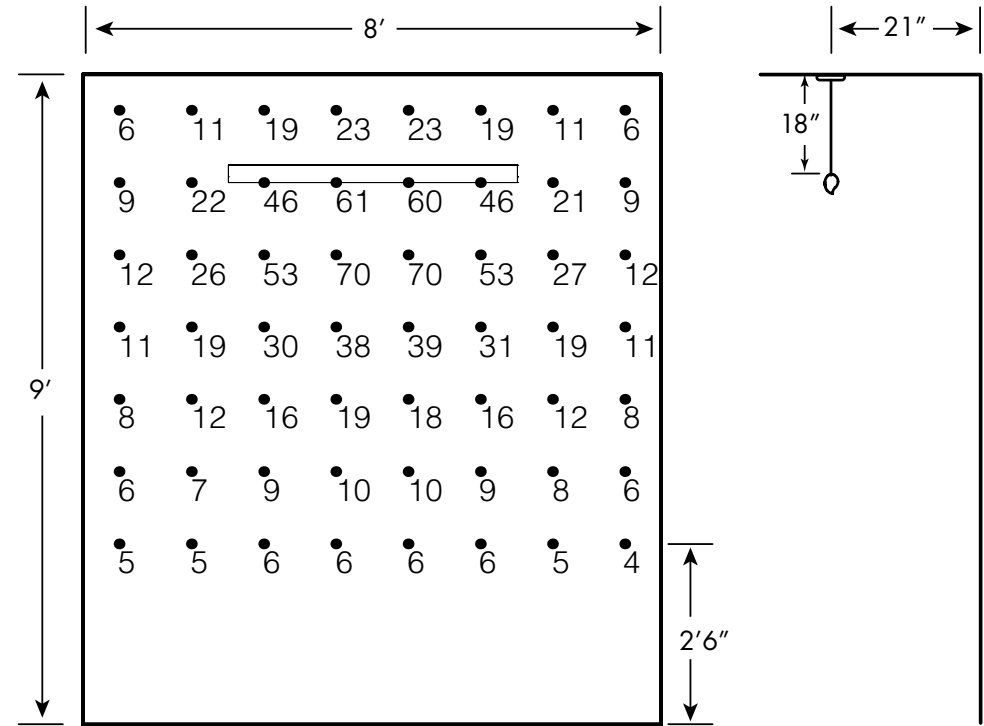

Initial FC Levels
 Reflectance: 80/50/20

Ordering Guide

Finelite Series: Muro (MU-O, MU-C, MU-S) _____

Run length (2', 4', 8', multiples standard) _____

Light Engine (LED T8) _____

Color Temp (3500k, 4100k) _____

Circuiting (SC-single circuit) _____

Voltage (120, 277V) _____

Mounting (FA, WM) _____

Endcap Flat (FE) _____

MU-O - 32' - LED T8 - 3500k - SC - 120 - FA - FE

Muro is RoHS compliant



Finelite, Inc. • 30500 Whipple Road • Union City, CA 94587-1525 • 510 / 441-1100 • FAX: 510 / 441-1510 • www.finelite.com
 Photography Credits: ©Michael David Rose Photography - Product Only. ©2011 Finelite Inc. All rights reserved. CPI0041 12/11

