
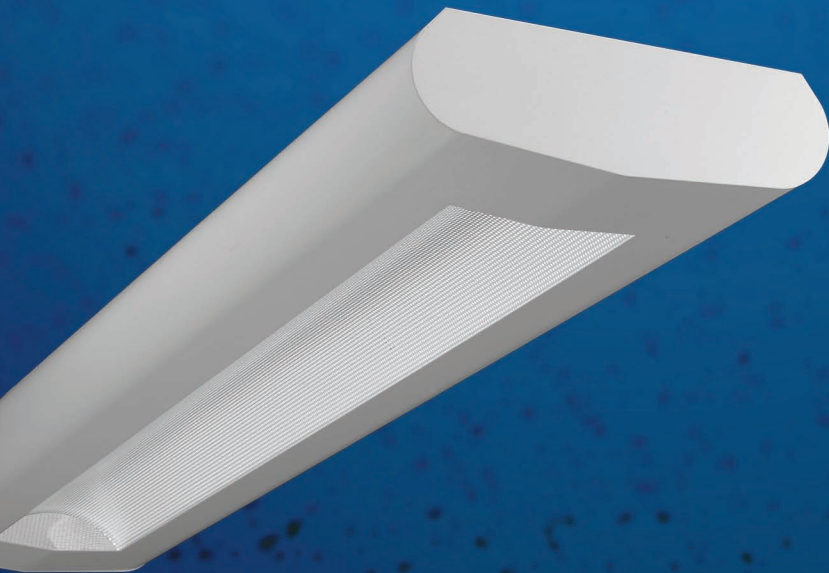


FINELITE


Series 10

*Field
Interchangeable
Optics*

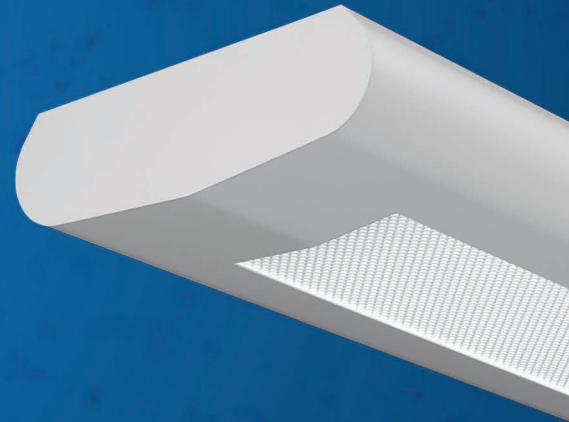

FINELITE

Select the combination that gives you the light you

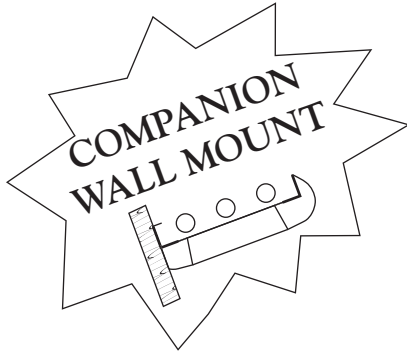


5

Downlight Shielding Options

Affordable Brightness




A12 Diffuser Acrylic Lens




Stylish Subtle Brightness




Perf Shield White




General Purpose





Cross Blade Baffle White



VDT Compatible




Parabolic Louver Semi-Specular

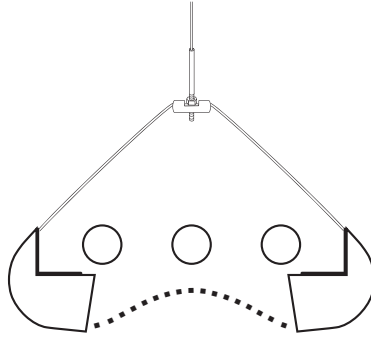

2


Reflector Choices

Standard 91 White



White side reflectors provide good basic light distribution - 70/30


Extended Performance




Specular side reflectors enhance performance.

2

Lamp Ballast Systems




T8



T5HO

Diffuser between lamps and shielding is standard with T5HO lamps.

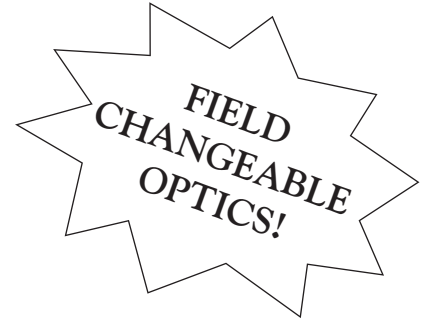


4

Uplight Control Options

"Open"


In an "Open" fixture the lamps are exposed on the top side. "Open" fixtures provide a greater percentage of uplight than other options.

Controlled Center Optics




Gives you 3 fixtures in one! Perfect for educational market. Dual switching -55/45, 75/25, 5/95

Soft Top Optics



Diffuses light into soft rays above and delivers downlight where needed - 30/70

Totally Direct Optics




Directs light 100% downwards - 0/100

need today and change it easily in the field tomorrow.


SPACE TRANSITIONS

Change optics easily in the field when you reconfigure your space. Change your lighting without ever having to take the fixtures down.

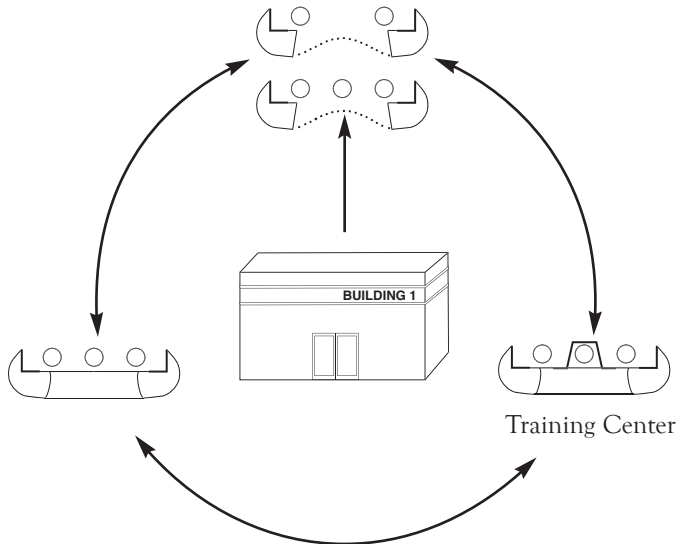


CONTROLLED CENTER OPTICS


Three systems in one!



55/45



75/25




5/95 or 10/90

Perfect for Classrooms - Conference Rooms - Training Centers

MOUNTING

- Standard Semi-Adjustable aircraft cable, level $\pm 0.5\%$
- Optional Fully Adjustable cable with Release Lock
- Standard side to side fixture leveling with unique **Level & Lock Assembly™**




Level & Lock Assembly™ shown with Optional Fully Adjustable Cable

BALLASTS – “Yes” all Standard Ballasts

- T8 - 1, 2, 3 lamp
- T5HO - 1, 2, 3 lamp
- All major dimming systems
- Full size battery backup units

LAMP GUARD


Optional virgin clear acrylic **Lamp Guard** fits between T8 lamps and shielding.



Diffuser between lamps and shielding is standard with T5HO lamps.

DUST COVER

Optional **Dust Cover** keeps fixtures covered and clean.



NOTE: Lamp Guard and Dust Cover may be used together.

ENDCAPS

Finelite standard flat endcap or optional rounded endcap with reveal.

LENGTHS

4', 8', 12' multiples can be joined to make runs as long as required.

EXCELLENT PERFORMANCE

OFFICE & CONFERENCE ROOM

Perf Shield
90% uplight
10% downlight

Parabolic Louver
70% uplight
30% downlight

WIDTH

LENGTH

SERIES 10
3 T8 - EP

Ceiling
9'0" ≤

Suspension
18" ≤
(7'3" ≤ AFF)

Reflectances - 80/50/20

Room Size	Shielding	Maintained Avg.	Layout
12' X 12'	Perf Shield	40 fc	1 - 8'
12' X 12'	Parabolic Louver	48 fc	1 - 8'
15' X 15'	Perf Shield	44 fc	1 - 12'
15' X 15'	Parabolic Louver	51 fc	1 - 12'

CLASSROOM PLAN

30 FEET

30 FEET

A12 Diffuser
80% uplight
20% downlight

White Cross Blade
70% uplight
30% downlight

SERIES 10
3 T8 - EP


Ceiling
9'6" ≤

Suspension
18" ≤

Fixture Spacing
12'

Reflectances - 80/50/20

Shielding	# Lamps Turned On	Maintained Avg. Footcandles	Ceiling Uniformity
A12 Diffuser	3 T8	53 fc	9 : 1
White Cross Blade	3 T8	59 fc	7 : 1

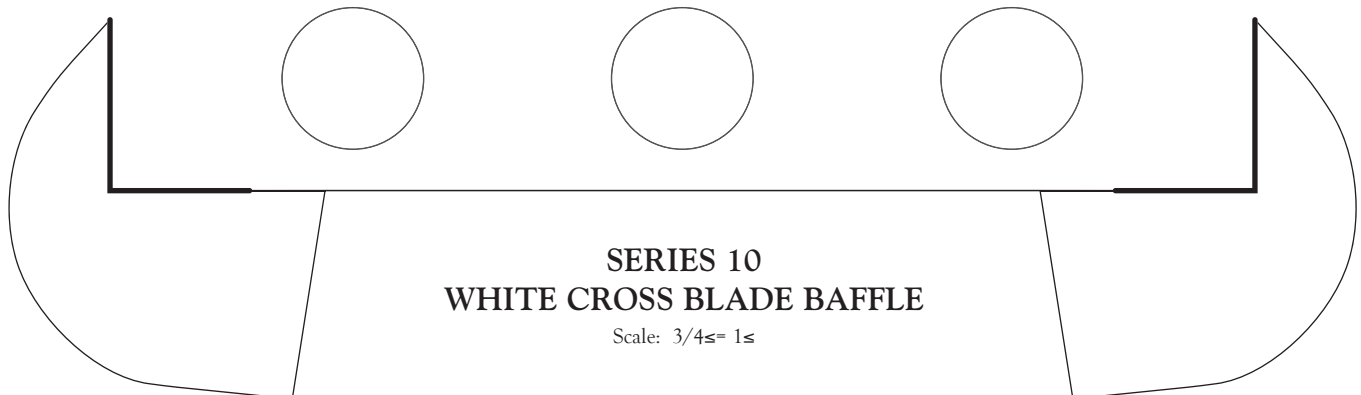

Series 10 takes versatility to a whole new level. Choose a shielding option for any brightness need. And, no matter which optical package you choose today, you can change it in the field if your needs change anytime in the future—you don't even have to take the fixtures down to do it! Interchangeable parts snap in and out easily.

Steel die-formed, interlocking joiners assure straight rows.


Fixtures are factory pre-tested and all row fixtures are supplied with pre-installed electrical quick connect mating plugs.

Fixtures are easy to install, on-grid, with all the necessary hardware included—even the T-Bar clips. Installation is faster than with any other type of approved mounting method, lowering the project cost.


Fixtures can be supplied from the factory pre-lamped, and every fixture is shipped in a protective plastic sleeve to keep it clean until project completion.

Series 10 redefines “custom lighting” with its field interchangeable shieldings and optics.


END OPTIONS & JOINT DETAIL

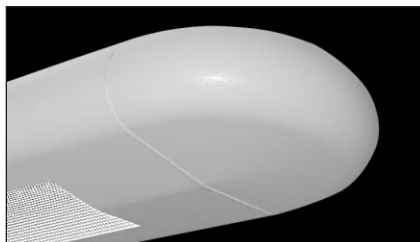

ROUNDED ENDCAP

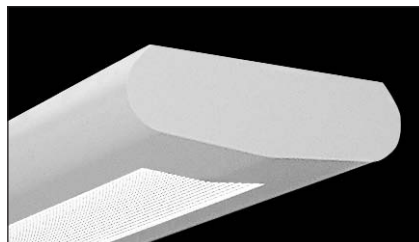

FLAT ENDCAP

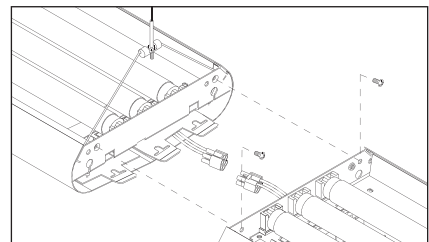

PRECISION JOINING