



FINELITE

Series 8-PW

Perforations ♦ *Windows* ♦ *Elegance*

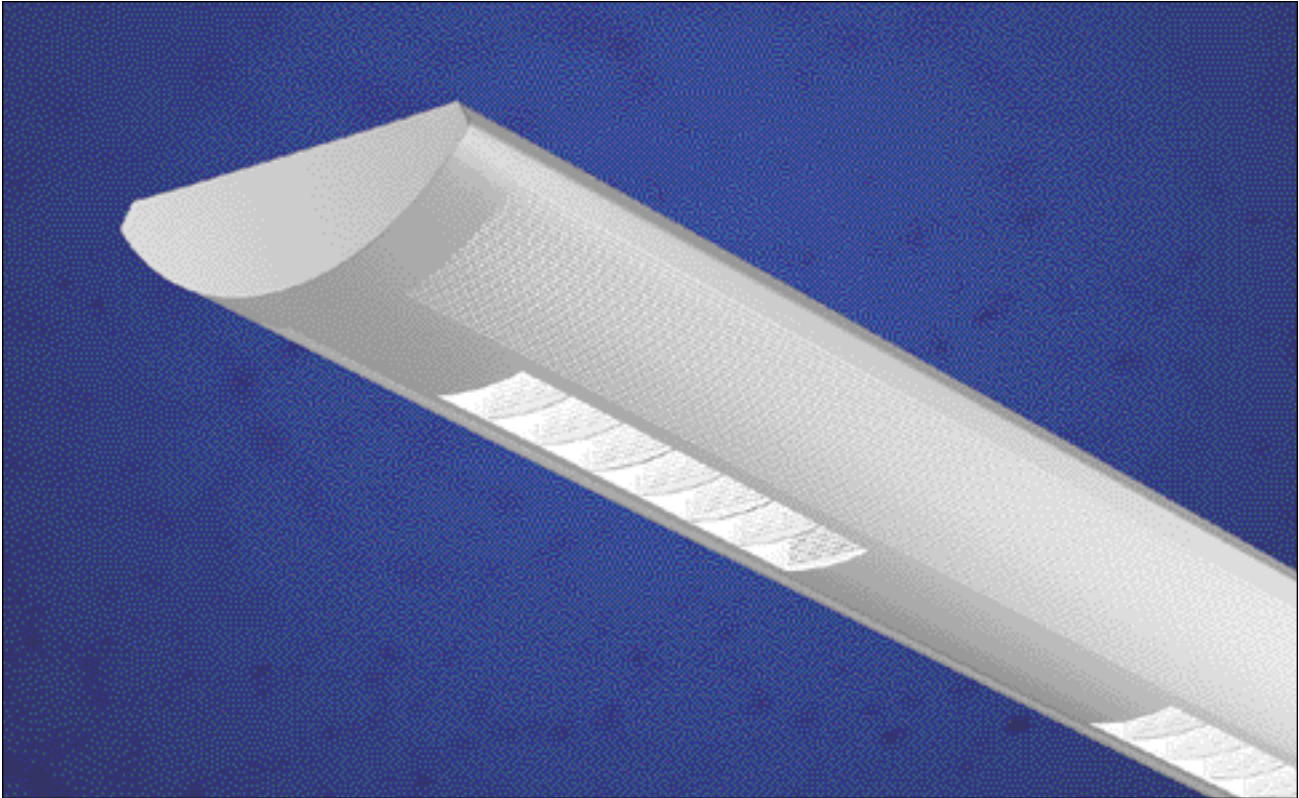

Series 8-PW Perf with Windows provides the best of both worlds—indirect light for luminous, uniform ceilings and 10-15% downlight for additional visual interest. Because there is no glare, this elegant package affords the user more alternatives for lighting a multitude of spaces whether they be general offices, training centers or conference rooms. Series 8-PW is available with 2, 3 or 4 T8 lamps in lengths of 4, 8, and 12. Finelite's standards of die-formed precision manufacturing and luminaire efficiency are combined in Series 8-PW at very affordable prices.

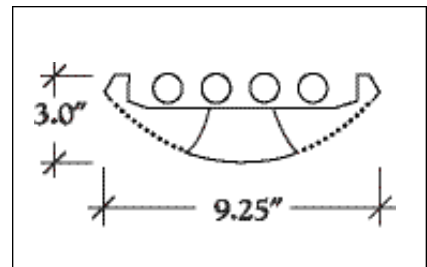


Available with 2, 3, or 4 T8 lamps.


S8-PW ENDCAP & PERF/WINDOW DETAIL



STANDARD FLAT ENDCAP

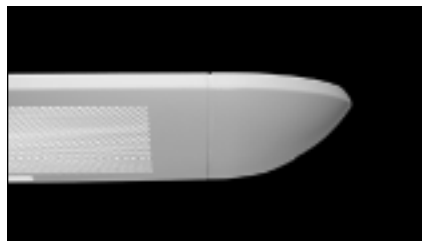


OPTIONAL ROUNDED ENDCAP WITH 0.100 REVEAL

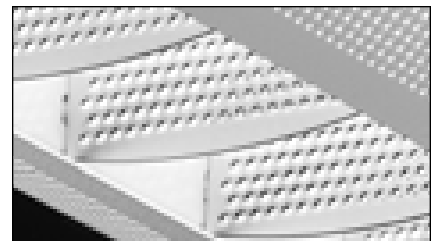

PERFORATED BAFFLES

EXCELLENT PERFORMANCE

OFFICE & CONFERENCE ROOM

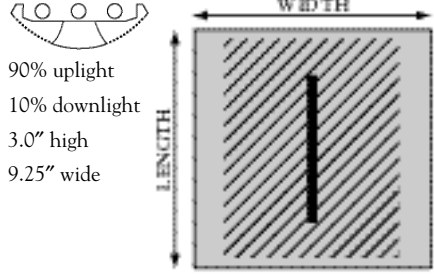

SERIES 8-PW
3 T8


90% uplight
10% downlight
3.0" high
9.25" wide

Ceiling 9'0"
Suspension 18" (7'3" AFF)

Reflectances - 80/50/20

Room Size	Maintained Avg.	Layout
10' X 12'	44 fc	1 - 8'
12' X 12'	40 fc	1 - 8'
12' X 15'	57 fc	1 - 12'
15' X 15'	50 fc	1 - 12'

OPEN OFFICE PLAN

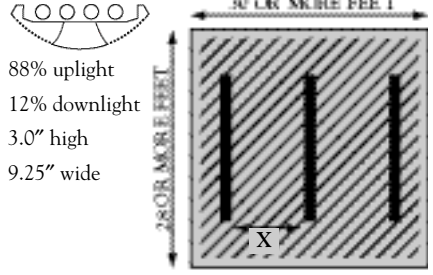

SERIES 8-PW
4 T8

88% uplight
12% downlight
3.0" high
9.25" wide


Ceiling 12'0"
Suspension 36" (8'9" AFF)

Reflectances - 80/50/20

Fixture Spacing	Avg. Footcandles (Maintained)	Ceiling Uniformity
12'	71 fc	8 : 1
14'	62 fc	9 : 1

ELEGANCE REDEFINED

SERIES 8-PW Scale: 3/4" = 1"

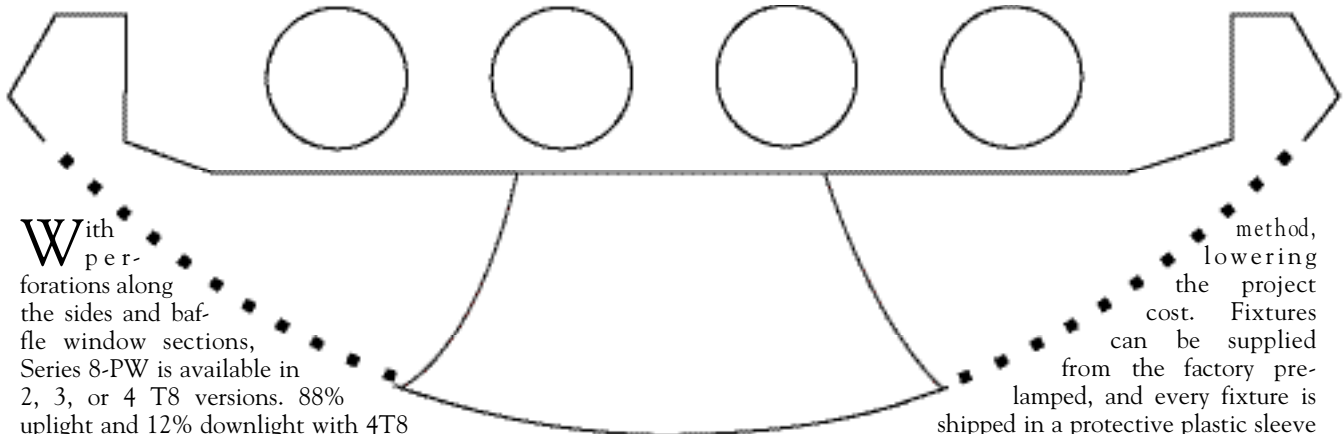

With perforations along the sides and baffled window sections, Series 8-PW is available in 2, 3, or 4 T8 versions. 88% uplight and 12% downlight with 4T8 lamps, or 90% uplight and 10% downlight with 2T8 outboard lamps. Straight rows are assured by Finelite's die-formed interlocking aligner bracket. Tolerances are held to 0.005". Fixtures are pretested at the factory, and all row fixtures are supplied with pre-installed electrical quick connect mating plugs. Fixtures installed on-grid are supplied with all necessary hardware, including the T-Bar clips. Installation is much faster than with any other type of approved mounting

method, lowering the project cost. Fixtures can be supplied from the factory pre-lamped, and every fixture is shipped in a protective plastic sleeve to keep it clean until project completion. Standard support cable is stainless steel, supplied with plated hardware. Semi-adjustable and fully adjustable lengths available. Finelite white is standard, 185 additional finishes using Tiger Drylac's RAL color chart are available as an option. Dimming ballasts, battery back-up and other options are available. Suitable for a variety of applications, Finelite's Series 8-PW adds a unique dimension to any space.

STANDARD DIE-FORMED JOINER



An internal die-formed joiner reinforces the joint for strength.

STANDARD PLUG-TOGETHER WIRING



An injection molded aligner sleeve (shown in place) fits into the internal joiner.

STANDARD 'NO LIGHT LEAK' JOINTS



Finelite's precision joining ensures strong tight joints with no light leaks.