

Wall Wash Pendant Mounting and Feed Guide High Performance 2" Aperture (HP-2 WW)



FINELITE
Better Lighting

Customer: _____ Job: _____ PO: _____

SUSPENSION TYPE

Fully Adjustable
1/4 X 20 threaded coupler

50"- Standard
89512

100" - 89513

150" - 89514

Custom

Flexible Mounting
89605

Direct Only

Suspension points adjust up to 2' in from the end of 8' or 12' fixture lengths and up to 1' in on shorter lengths.

Stem

(Select distance between threads)

9"

12"

15"

21"

24"

select suspension

Contact factory for additional lengths

MOUNTING HARDWARE

On-Grid 1" T-Bar Support
94001

C1

On-Grid 9/16" T-Bar Support
94020

C2

On-Grid 9/16" Screw Slot T-Bar Support
94029

C3

Caddy 512 HD Between T-Bar Supports
89316

9/16" Screw Slot HD With Extended Stud For Tegular Tile
94029 & 94067

POWER FEED

Straight 18/5 SJT Cord
96105

1 Circuit + 0-10V Dimming

Standard For ID only
1 feed controls up and down light together.

Optional For ID only
2 feed controls up and down light separately

Straight 18/3 SJT Cord
96099

No 0-10V Dimming Control

Straight 18/4 SJT Cord
2 Circuit
96100

No 0-10V Dimming Control

Stem Feed

Cord and Plug

© 2016 FINELITE, INC. ALL RIGHTS RESERVED OPG0073: 08/16

Wall Wash Pendant Mounting and Feed Guide High Performance 2" Aperture (HP-2 WW)



FINELITE
Better Lighting

Customer: _____ Job: _____ PO: _____

Finelite Standard	<p>Power Connection & Support</p> <p><input type="checkbox"/> Finelite GridBox™ Flex supplied by others.</p> <p>89330</p>	<p>Non-Power Connection & Support</p> <p><input type="checkbox"/> 2" Canopy</p> <p>89331</p>
--------------------------	--	---

* Supplied with 5" Canopy.

Options	<p><input type="checkbox"/> Dual GridBox™ Connection</p> <p>89332 Flex supplied by others.</p>	<p><input type="checkbox"/> GridBox™ Connection Tegular Tile</p> <p>89335</p>	<p><input type="checkbox"/> 3.5" Canopy</p> <p>89333</p>	<p><input type="checkbox"/> 2" Canopy Tegular Tile</p> <p>89200</p>
	<p><input type="checkbox"/> J-Box Feed Support*</p> <p>89111</p>	<p><input type="checkbox"/> Stem Feed Support J-Box*</p> <p>89120</p>	<p><input type="checkbox"/> J-Box Support*</p> <p>89210</p>	
Options	<p><input type="checkbox"/> Offset J-Box Surface Mount*</p> <p>↔ up to 24" ↔</p> <p>81113</p>	<p><input type="checkbox"/> Offset J-Box T-Bar Support*</p> <p>89106</p>	<p><input type="checkbox"/> Stem Support*</p> <p>89120</p>	
	<p><input type="checkbox"/> Dual Offset J-Box Surface Mount*</p> <p>↔ up to 24" ↔</p> <p>81111</p>	<p><input type="checkbox"/> Dual Offset J-Box T-Bar Support*</p> <p>89107</p>	<p><input type="checkbox"/> Surface Mount (Standard)</p> <p>89225</p>	<p><input type="checkbox"/> Surface Mount (Optional)</p> <p>89334</p>
Options	<p><input type="checkbox"/> Custom Power Connection</p>	<p><input type="checkbox"/> No Power Connection</p>	<p><input type="checkbox"/> Custom Non-Power Connection</p>	<p><input type="checkbox"/> No Connection</p>

Hardware compatible with 4" octagonal J-Box. Consult Finelite Customer Service for pricing on all options.


Wall Wash Pendant Mounting and Feed Guide High Performance 2" Aperture (HP-2 WW)



FINELITE
Better Lighting

Customer: _____ Job: _____ PO: _____

Standard Fixture Lengths & Support Locations

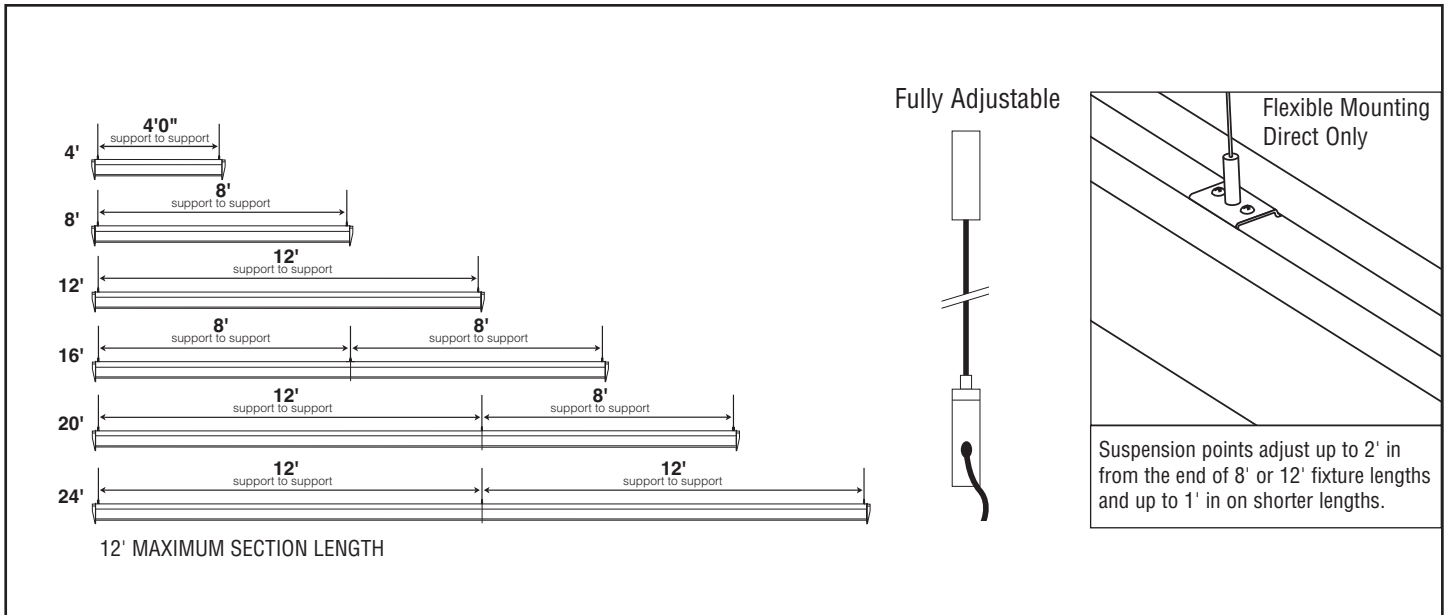

Proper Positioning

