


# Pendant Mounting and Feed Guide

## High Performance 4" Aperture (HP-4 WW)




**FINELITE**  
Better Lighting

Customer: \_\_\_\_\_ Job: \_\_\_\_\_ PO: \_\_\_\_\_

### SUSPENSION TYPE

**Fully Adjustable**  
1/4 X 20 threaded coupler



**50"- Standard**  
89512

100" - 89513


150" - 89514

Custom

---

**Flexible Mounting**  
89605


Direct Only

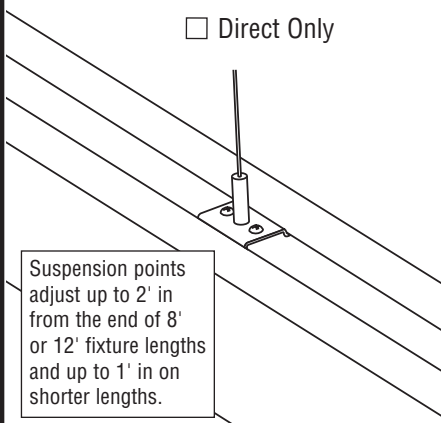

Suspension points adjust up to 2' in from the end of 8' or 12' fixture lengths and up to 1' in on shorter lengths.

---

**Stem**

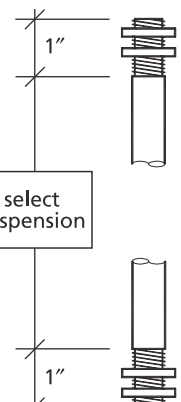

(Select distance between threads)

9"

12"

15"

21"


24"

select suspension

Contact factory for additional lengths

### MOUNTING HARDWARE


**On-Grid 1" T-Bar Support**  
94001



**C1**

---


**On-Grid 9/16" T-Bar Support**  
94020



**C2**

---


**On-Grid 9/16" Screw Slot T-Bar Support**  
94029



**C3**


---

**Caddy 512 HD Between T-Bar Supports**  
89316

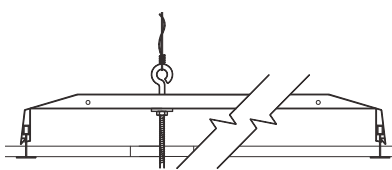


---

**9/16" Screw Slot HD With Extended Stud For Tegular Tile**  
94029 & 94067



### POWER FEED

**Straight 18/5 SJT Cord**  
96105




1 Circuit + 0-10V Dimming

---


**Standard** For ID only  
1 feed controls up and down light together.

**Optional** For ID only  
2 feed controls up and down light separately

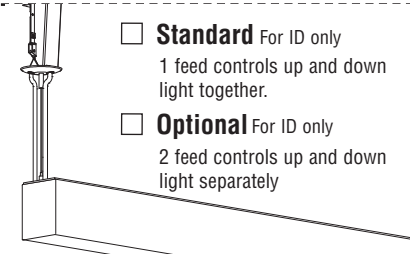

---


**Straight 18/3 SJT Cord**  
96099



No 0-10V Dimming Control

---


**Straight 18/4 SJT Cord**  
2 Circuit  
96100



No 0-10V Dimming Control


---

**Stem Feed**




---

**Cord and Plug**



© 2015 FINELITE, INC. ALL RIGHTS RESERVED 0PG0065: 09/15

# Pendant Mounting and Feed Guide High Performance 4" Aperture (HP-4 WW)

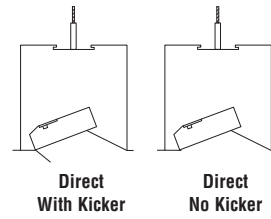

**FINELITE**  
Better Lighting

Customer: \_\_\_\_\_ Job: \_\_\_\_\_ PO: \_\_\_\_\_


<b>Finelite Standard</b>	<p><b>Power Connection &amp; Support</b></p> <p><input type="checkbox"/> Finelite GridBox™ Flex supplied by others.</p> <p>89330</p>	<p><b>Non-Power Connection &amp; Support</b></p> <p><input type="checkbox"/> 2" Canopy</p> <p>89331</p>
--------------------------	--	---

\* Supplied with 5" Canopy.

<b>Options</b>	<p><input type="checkbox"/> Dual GridBox™ Connection Flex supplied by others.</p> <p>89332</p>	<p><input type="checkbox"/> GridBox™ Connection Tegular Tile</p> <p>89335</p>	<p><input type="checkbox"/> 3.5" Canopy</p> <p>89333</p>	<p><input type="checkbox"/> 2" Canopy Tegular Tile</p> <p>89200</p>	
	<p><input type="checkbox"/> J-Box Feed Support*</p> <p>89111</p>	<p><input type="checkbox"/> Stem Feed Support J-Box*</p> <p>89120</p>	<p><input type="checkbox"/> J-Box Support*</p> <p>89210</p>		
<b>Options</b>	<p><input type="checkbox"/> Offset J-Box Surface Mount* up to 24"</p> <p>81113</p>	<p><input type="checkbox"/> Offset J-Box T-Bar Support*</p> <p>89106</p>	<p><input type="checkbox"/> Stem Support*</p> <p>89120</p>		
	<p><input type="checkbox"/> Dual Offset J-Box Surface Mount* up to 24"</p> <p>81111</p>	<p><input type="checkbox"/> Dual Offset J-Box T-Bar Support*</p> <p>89107</p>	<p><input type="checkbox"/> Surface Mount (Standard)</p> <p>89225</p>	<p><input type="checkbox"/> Surface Mount (Optional)</p> <p>89334</p>	
<b>Options</b>	<p><input type="checkbox"/> Custom Power Connection</p>	<p><input type="checkbox"/> No Power Connection</p>	<p><input type="checkbox"/> Custom Non-Power Connection</p>	<p><input type="checkbox"/> No Connection</p>	

Hardware compatible with 4" octagonal J-Box. Consult Finelite Customer Service for pricing on all options.


# Pendant Mounting and Feed Guide High Performance 4" Aperture (HP-4 WW)

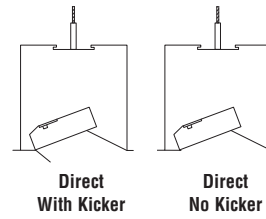

**FINELITE**  
*Better Lighting*

Customer: \_\_\_\_\_ Job: \_\_\_\_\_ PO: \_\_\_\_\_

## Standard Fixture Lengths & Support Locations

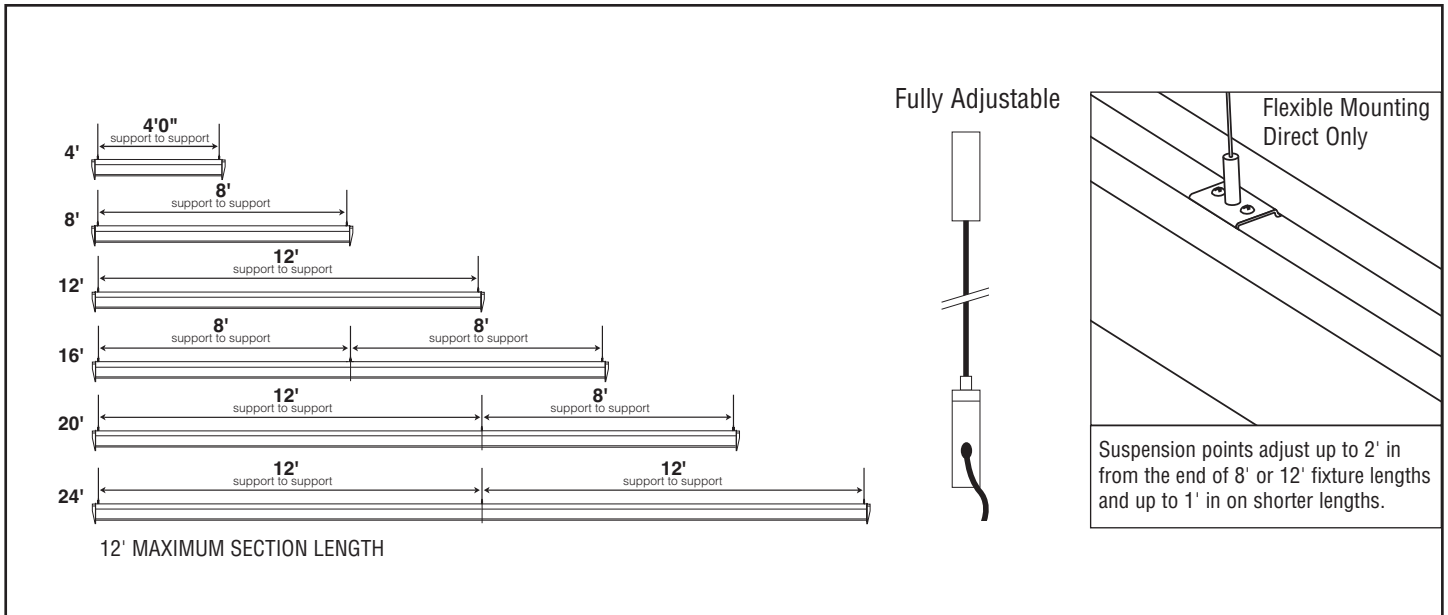

## Proper Positioning

