


# FINELITE

## Series 10 WM Instructions - Mounting Bracket

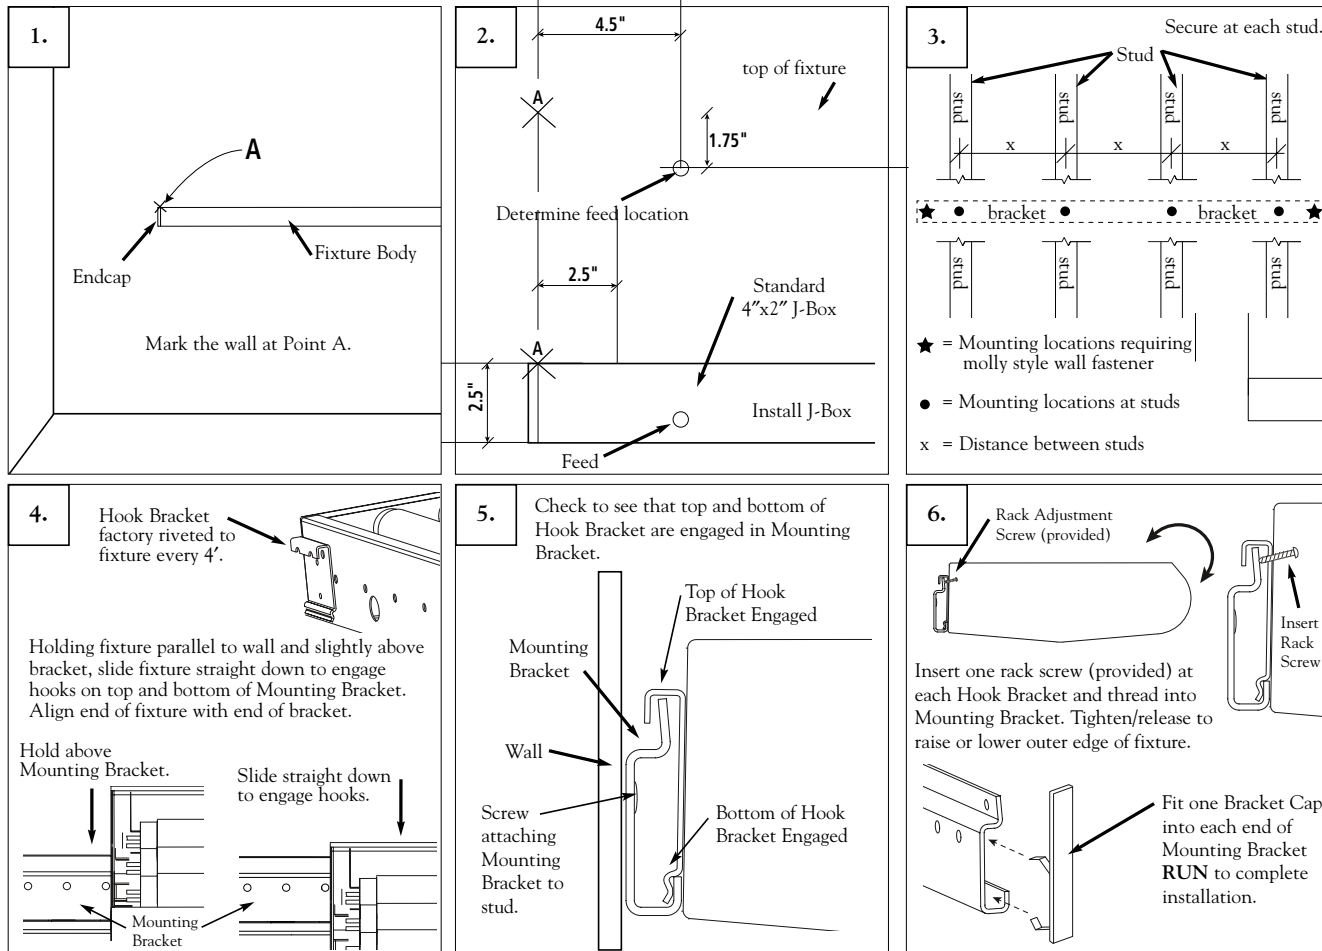

### INSTRUCTIONS

- Position fixture on wall in desired location. Mark on wall the point where the endcap and the fixture body meet. This is Point A. Remove fixture.
- Determine feed location by measuring a horizontal line 4.5" from Point A toward center of fixture, then 1.75" downward. Mark this spot for feed.  
  
Install 4"x2" J-Box centering box over feed location and align top of box with Point A. Leave 8-10" of power wire exposed.
- Position Mounting Bracket so feed hole is aligned with J-Box feed and pull wire leads through. Secure one side of Mounting Bracket to the wall. Using a torpedo level, secure opposite side of Mounting Bracket to wall. Using holes provided, secure Mounting Bracket to each wall stud. Use molly style fastener at ends if stud is not available.
- Holding fixture parallel to wall and slightly above bracket, slide fixture straight down to engage hooks on top and bottom of Mounting Bracket. Align end of fixture with end of bracket. Splice feed.
- Check to ensure top and bottom of Hook Bracket are engaged in wall Mounting Bracket.
- Insert rack adjustment screw (provided) at each Hook Bracket location and thread into Mounting Bracket. Tighten/release to raise or lower fixture. Place Bracket Cap on each exposed end of Mounting Bracket and ends of run.

### Series 10 Wall Mount Installation Instructions - Mounting Bracket