FINELITE

Series 10WM Instructions - Surface Mount

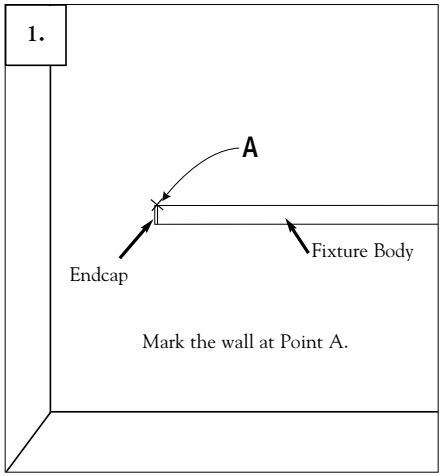

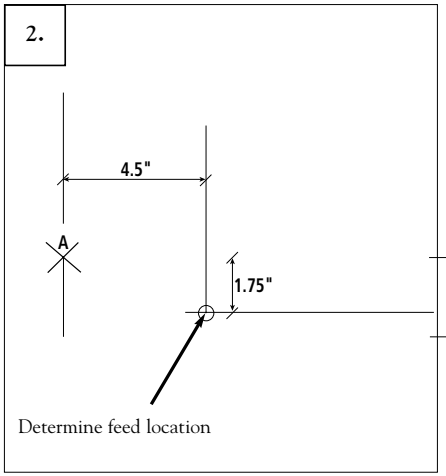

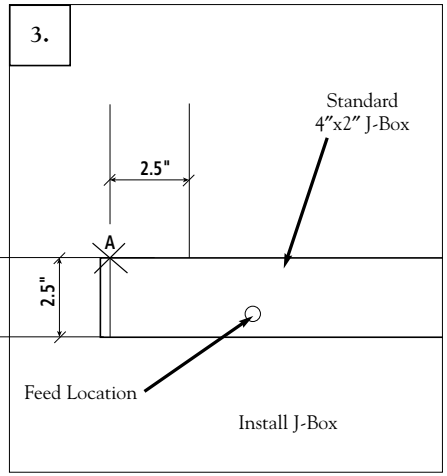

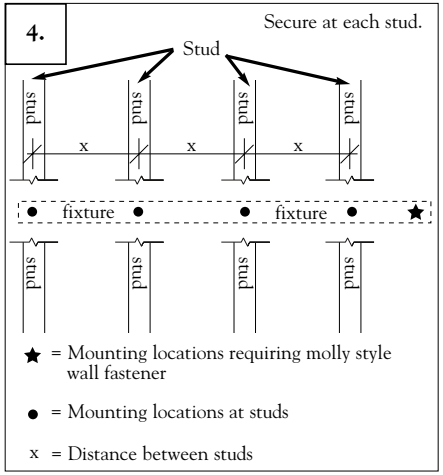

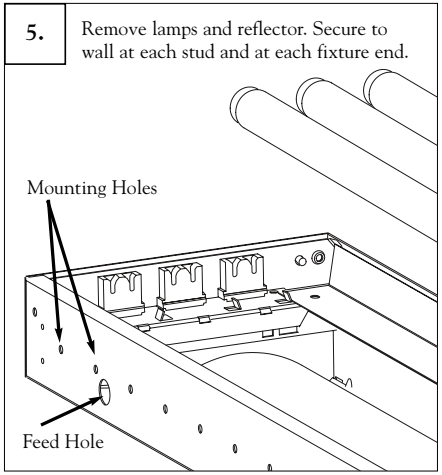

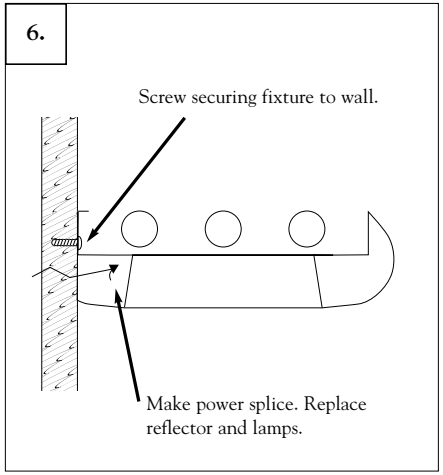

INSTRUCTIONS

1. Position fixture on wall in desired location. Mark on wall the point where the endcap and the fixture body meet. This is Point A. Remove fixture.

2. Determine feed location by measuring a horizontal line 4.5″ from Point A toward center of fixture, then 1.75″ downward. Mark this spot for feed.

3. Install 4″x2″ J-Box centering box over feed location and align top of box with Point A. Leave 8-10″ of power wire exposed.

4a. Measure a horizontal line from Point A to the opposite end of the fixture (or run) and mark the wall at the center of each stud and at the end of the fixture (or run). This marks the top of the fixture (or run).

4b. At each support location that is not secured into a stud (usually ends) drill hole 1.25″ down from top of fixture. Use a molly style fastener at end(s) if stud is not available.

5. Remove reflector and lamps. Position fixture on wall level with marks made in Step 4a. Secure to wall at each end and at each stud.

6. Make splice in feed, reinstall reflector and lamps.

Series 10 Wall Mount Installation Instructions - Surface Mount

Finelite, Inc. ◇ 30500 Whipple Road ◇ Union City, CA 94587-1530 ◇ 510 / 441-1100 ◇ FAX: 510 / 441-1510 ◇ www.finelite.com ◇ ***Better Lighting For A Better Workplace***

98028.08/01