


Photometric Reports

SERIES 2: 2 T8 (ITL REPORT 40617)




65% Uplight
35% Downlight

Efficiency 79.8%



LEGEND:

0-deg. - - - - -
90-deg. —————

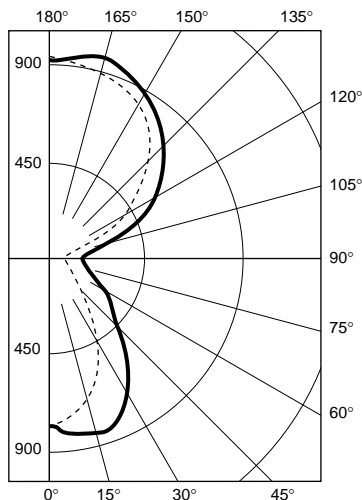

Coefficients of Utilization - Zonal Cavity Method											
RCC RW	80				70				50		
	70	50	30	10	70	50	30	10	50	30	10
0	83	83	83	83	75	75	75	75	60	60	60
1	75	72	69	66	68	65	62	60	52	50	49
2	69	63	58	54	62	57	53	50	46	43	41
3	63	56	50	45	57	50	46	42	41	37	34
4	58	49	43	39	52	45	40	36	36	33	30
5	53	44	38	33	48	40	35	31	33	29	26
6	49	40	33	29	44	36	31	27	29	25	22
7	45	36	30	25	41	33	27	24	27	23	20
8	42	32	27	22	38	30	24	21	24	21	18
9	39	30	24	20	35	27	22	19	22	19	16
10	36	27	22	18	33	25	20	17	21	17	14
Floor Cavity Refl. - 0.20											
ITL Test # ITL 40617											

For layouts or additional photometry, contact your local representative or the factory.