


Pendant Mounting and Feed Guide

High Performance 4" Aperture Curved (HP-4)



FINELITE®
Better Lighting

Customer: _____ Job: _____ PO: _____


SUSPENSION TYPE				
	<p>Fully Adjustable 1/4 X 20 threaded coupler</p>	<input type="checkbox"/> 50"- Standard 89512	<input type="checkbox"/> 100" - 89153	<input type="checkbox"/> 150" - 89514 <input type="checkbox"/> Custom

MOUNTING HARDWARE		
See pg. 3 for On-Grid Mounting Guide		
<input type="checkbox"/> On-Grid 1" T-Bar Support 94001 <p style="text-align: right; font-weight: bold; font-size: 1.2em;">C1</p>	<input type="checkbox"/> On-Grid 9/16" T-Bar Support 94020 <p style="text-align: right; font-weight: bold; font-size: 1.2em;">C2</p>	<input type="checkbox"/> On-Grid 9/16" Screw Slot T-Bar Support 94029 <p style="text-align: right; font-weight: bold; font-size: 1.2em;">C3</p>
<input type="checkbox"/> Caddy 512 HD Between T-Bar Supports 89316 	<input type="checkbox"/> 9/16" Screw Slot HD With Extended Stud For Tegular Tile 94029 & 94067 	

POWER FEED			
<input type="checkbox"/> Straight 18/5 SJT Cord 96105 <p style="text-align: center;">1 Circuit + 0-10V Dimming</p>	<input type="checkbox"/> Straight 18/3 SJT Cord 96099 <p style="text-align: center;">No 0-10V Dimming Control</p>	<input type="checkbox"/> Straight 18/4 SJT Cord 2 Circuit 96100 <p style="text-align: center;">No 0-10V Dimming Control</p>	<input type="checkbox"/> Cord and Plug

Pendant Mounting and Feed Guide

High Performance 4" Aperture Curved (HP-4)



FINELITE®
Better Lighting

Customer: _____ Job: _____ PO: _____

Finelite Standard	<p>Power Connection & Support</p> <p><input type="checkbox"/> Finelite GridBox™ Flex supplied by others.</p> <p>89330</p>	<p>Non-Power Connection & Support</p> <p><input type="checkbox"/> 2" Canopy</p> <p>89331</p>
--------------------------	--	---


* Supplied with 5" Canopy.

Options	<p><input type="checkbox"/> Dual GridBox™ Connection</p> <p>89332 <small>Flex supplied by others.</small></p>	<p><input type="checkbox"/> GridBox™ Connection Tegular Tile</p> <p>89335</p>	<p><input type="checkbox"/> 3.5" Canopy</p> <p>89333</p>	<p><input type="checkbox"/> 2" Canopy Tegular Tile</p> <p>89200</p>	
	<p><input type="checkbox"/> J-Box Feed Support*</p> <p>89111</p>	<p><input type="checkbox"/> J-Box Support*</p> <p>89210</p>			
Options	<p><input type="checkbox"/> Offset J-Box Surface Mount*</p> <p>↔ up to 24" ↔</p> <p>81113</p>	<p><input type="checkbox"/> Offset J-Box T-Bar Support*</p> <p>89106</p>	<p><input type="checkbox"/> Surface Mount (Standard)</p> <p>89225</p>	<p><input type="checkbox"/> Surface Mount (Optional)</p> <p>89334</p>	
	<p><input type="checkbox"/> Dual Offset J-Box Surface Mount*</p> <p>↔ up to 24" ↔</p> <p>81111</p>	<p><input type="checkbox"/> Dual Offset J-Box T-Bar Support*</p> <p>89107</p>	<p><input type="checkbox"/> Custom Power Connection</p>	<p><input type="checkbox"/> No Power Connection</p>	<p><input type="checkbox"/> Custom Non-Power Connection</p>

Hardware compatible with 4" octagonal J-Box. Consult Finelite Customer Service for pricing on all options.

Pendant Mounting and Feed Guide

High Performance 4" Aperture Curved (HP-4)












FINELITE®
Better Lighting

Customer: _____ Job: _____ PO: _____

Refer to Record Drawings and building plans to determine exact mounting, suspension points, and power feed locations.


- = Suspension point
- = Additional suspension point for non-standard configurations

NOTE: These drawings are not to scale.

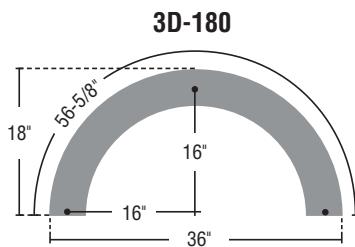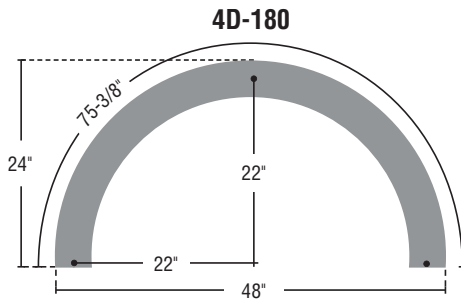

Pendant Mounting and Feed Guide

High Performance 4" Aperture Curved (HP-4)




FINELITE®
Better Lighting

Customer: _____ Job: _____ PO: _____


STANDARD CONFIGURATION EXAMPLES ^{1, 2}

RS x
Rounded Square-
Provide Side1
dimension and
desired 90°
curved section.

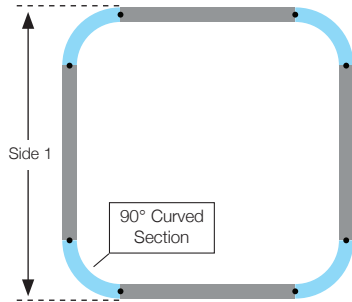


Example -
RS6'x2D90

RL x x
Rounded L-
Provide Side1 x
Side2 dimensions
and desired 90°
curved section.

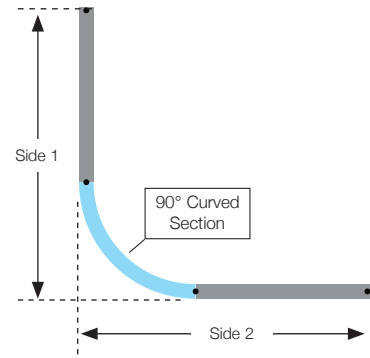


Example -
RL6'x6'x4D90

RR x x
Rounded
Rectangle-
Provide Side1 x
Side2 dimension
and desired 90°
curved section.

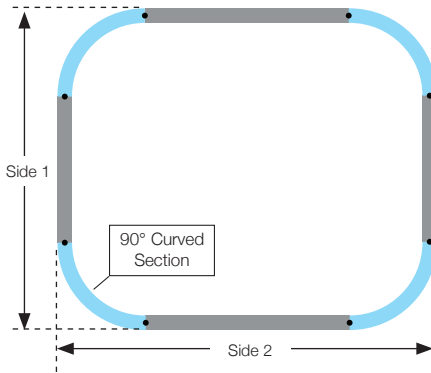


Example -
RR5'x7'x3D90

RU x x x
Rounded U-
Provide Side1 x
Side2 x Side3
dimensions and
desired 90° or 180°
curved section.

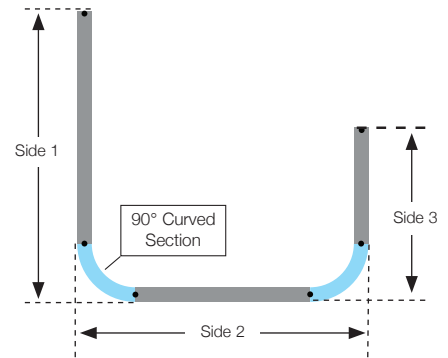

Example -
RU8'x6'x4'x2D90

ARC
Arc - Provide
desired curved
section.




Example -
ARC4D180

99CFG

Custom Configurations - Please provide a sketch or drawing showing desired linear length dimensions and curved sections.

Example -

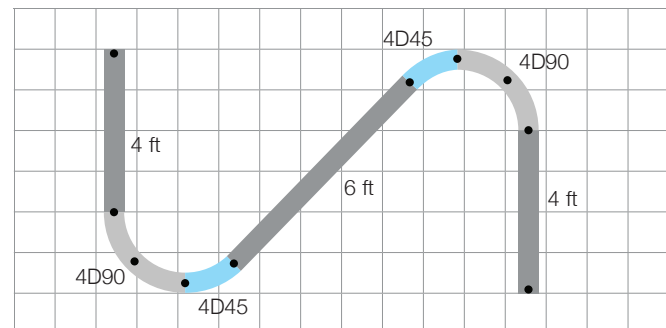


□ = 1 ft²

• = Suspension Points

¹ Drawings are not to scale

² 2' minimum length for linear sections

Pendant Mounting and Feed Guide High Performance 4" Aperture Curved (HP-4)



FINELITE[®]
Better Lighting

Customer: _____ Job: _____ PO: _____

= 1 ft²

