

FINELITE


High Performance 4" Wet Location (HP-4 WL) Recessed

Date

Project



Type

Comments

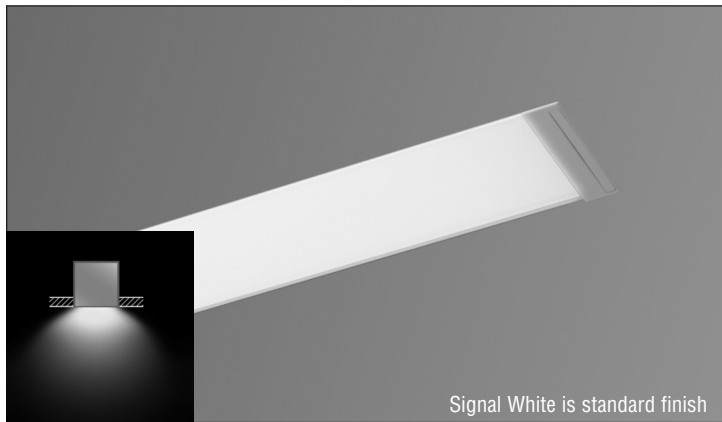


DESCRIPTION

High Performance 4" Aperture Wet Location Recessed (HP-4 WL R) is a linear LED luminaire listed for wet location and IP65 and IK10 rated. HP-4 WL R delivers uniform illumination with a clean linear aesthetic free of visible attachment hardware.

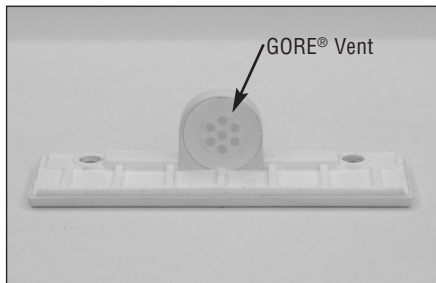

INTEGRATED GORE® PROTECTIVE VENT

Protective vents are integrated at endcaps and joints to equalize pressure, reduce condensation and protect internal fixture components against water, salts, corrosive liquids and particulates.

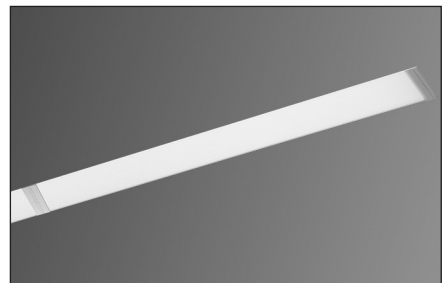


INDEPENDENT OR CONTINUOUS ROWS

2', 3', 4', 5', 6', 7', and 8' section lengths. Independent and continuous rows available. More information on page 2.

ORDERING GUIDE

Sample Number: HP-4 WL R - 32' - S - 835 - F - 120V - SC - VF

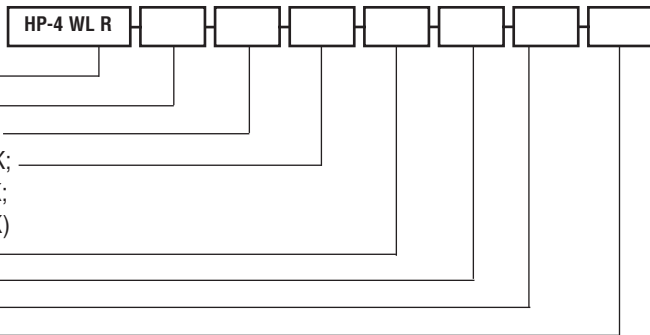

Finelite **HP-4 WL R**

Length (Minimum 2', increments of 1', standard)

Light Output (**S** - Standard, **B** - Boosted Standard, **H** - High, **V** - Very High)

LED CRI/CCT (**830** - 80 CRI min, 3000K **930** - 90 CRI min, 3000K;
835 - 80 CRI min, 3500K **935** - 90 CRI min, 3500K;
840 - 80 CRI min, 4000K **940** - 90 CRI min, 4000K)

Downlight Option (**F** - Flush (standard))

Voltage (**120V**, **277V**, **347V**)

Circuiting (**SC** - Single Circuit)¹

Ceiling Type² (**SF** - Spackle Flange³, **VF** - Visible Flange)

¹ Contact factory for switching options.
² Not Suitable for Vertical Mounting.
³ See page 2 for spackle flange depth options on ordering.

FINELITE

High Performance 4" Wet Location (HP-4 WL) Recessed

PHOTOMETRY - Recessed

Very High Output - 4" Luminaire


Efficacy (Lumen per watt): 94

Total luminaire output: 3456 Lumens (864 lumens/foot)
36.9 Watts (9.2 watts/foot)

Peak Candela Value: 1256 @ 0°

CCT: 3500K

ITL LM79 Report 90390



CANDLEPOWER SUMMARY						
	0.0	22.5	45	67.5	90	Flux
0	1256	1256	1256	1256	1256	
5	1250	1250	1250	1249	1249	119
15	1203	1195	1199	1199	1195	338
25	1107	1095	1103	1098	1094	507
35	976	964	968	960	957	603
45	814	804	804	797	792	618
55	629	622	620	612	607	553
65	430	426	422	417	414	417
75	226	225	223	222	224	237
85	52	54	55	56	57	64
90	0	0	0	0	0	

Total Light Output, 3500K, 80 CRI (Lumens) - 4" Luminaire			
S*	B*	H*	V**
1415	1779	2688	3456

Light Output, 3500K, 80 CRI (Lumens Per Foot)			
S*	B*	H*	V**
354	445	672	864

Power (Watts Per Foot)			
S*	B*	H*	V**
3.6	4.6	7.1	9.2

Efficacy, 3500K, 80 CRI (Lumens Per Watt)			
S*	B*	H*	V**
98	97	95	94

S - Standard Output, B - Boosted Standard Output, H - High Output, V - Very High Output

* Family Correlation based on 4" luminaire 3500K Very High Output (V) test - 120V.

** Based on ITL report: 90390

Lumen Adjustment Factors - 80 CRI	
3000K	0.985
3500K	1.000
4000K	1.032

Lumen Adjustment Factors - 90 CRI	
3000K	0.746
3500K	0.760
4000K	0.789

Apply a lumen adjustment factor to calculate lumens for the desired CCT and CRI.

SAMPLE LUMEN ADJUSTMENT CALCULATION

High Output (H), 4000K, 90 CRI

Lumen Adjustment Factor = 0.789

$$\text{Total Light Output} = 2688 \text{ lm} \times 0.789 = 2121 \text{ lm}$$

$$\text{Total Light Output per Foot} = 672 \text{ lm/ft} \times 0.789 = 530 \text{ lm/ft}$$

$$\text{watts/foot} = 7.1 \text{ W/ft}$$


$$\text{Efficacy} = \frac{530 \frac{\text{lm}}{\text{ft}}}{7.1 \frac{\text{W}}{\text{ft}}} = 75 \text{ lm/W}$$

FINELITE

High Performance 4" Wet Location (HP-4 WL) Recessed


HOUSINGS

Version 1



Visible Flange (VF)

Version 2




Spackle Flange (SF)


HARD CEILING MOUNTING OPTIONS

Two mounting options: threaded rod and screw mounting options. Mounting locations are located on each end of the luminaire. Mounting location is 6" away from each end of luminaire.


Threaded Rod Option

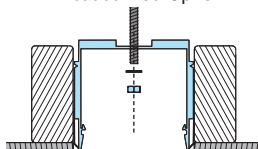

Screw Mount Option




Mounting location for securing to structure excluding endcap




HARD CEILING LENGTH DETAIL - 4' example


Visible Flange

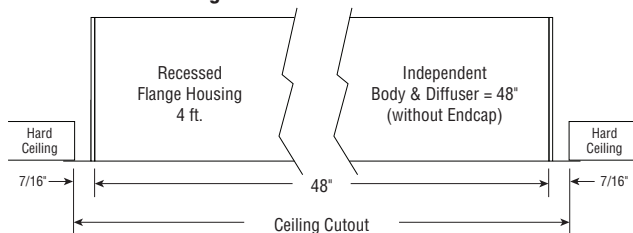


Spackle Flange

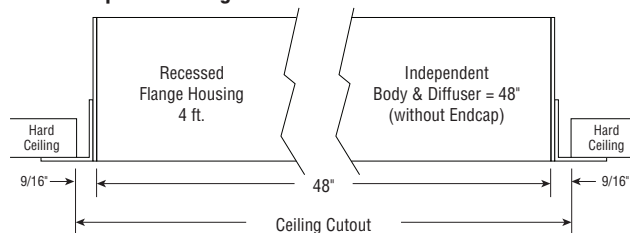

ROUGH-IN DIMENSIONS

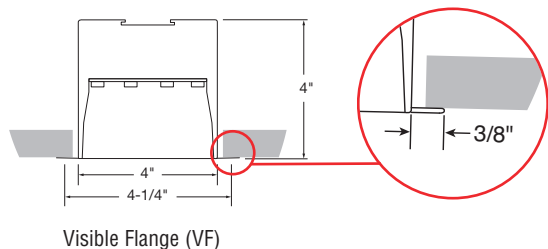

Visible Flange (VF)

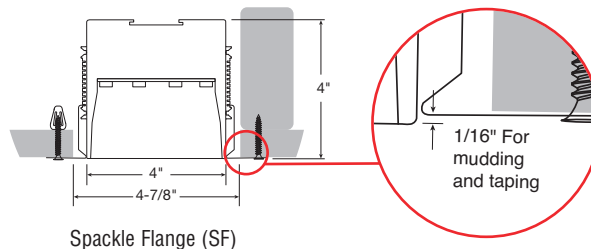

Spackle Flange (SF)

Spackle Flange can be specified to various depths to accommodate different building materials and thicknesses. The minimum depth is 1/16" and can be specified in 1/8" increments up to a maximum depth of 13/16".

A brand of LeGrand



FINELITE

High Performance 4" Wet Location (HP-4 WL) Recessed

SPECIFICATIONS

WET LOCATION: UL wet location listed and IP65 rated.

IMPACT PROTECTION: IK10

SPECIAL FEATURES: Integrated GORE® protective vent allows moisture to escape the fixture without letting water in and protects internal components from salts, corrosive liquids, and particulates.

TEMPERATURE RATING: Rated for -20°C to 40°C

CONSTRUCTION: Precision-cut 6061-T6 extruded aluminum body. Internal joiner system, plug-together wiring, standard.

ENDCAPS: Flat diecast aluminum endcaps add 1/4" to each end of luminaire. Each joints add 1/4" to overall length.

REFLECTORS: Die-formed 20-gauge cold-rolled steel reflectors finished in 96LG High Reflectance white powder coat paint.

DOWNLIGHT OPTION: Internal gaskets prevent moisture and debris. 8' maximum lens length. Flush frost white snap-in impact resistant acrylic lens standard, 63% transmissive, 99% diffusion.

LIGHT OUTPUT: Four lumen packages available, Standard Output (**S**), Boosted Standard Output (**B**), High Output (**H**), and Very High Output (**V**). Light engines are replaceable.

DRIVER: Replaceable 120V/277V and 347V Constant Current Reduction dimming driver standard. Can be wired dimming or non-dimming. 0-10V dimming controls with a range of 10%- 100%. Dimming to 1% available; consult factory. Driver is fully accessible from below the ceiling. Power Factor: ≥0.9. Total Harmonic Distortion (THD) <20%.

ELECTRICAL: Optional emergency to generator, internal generator transfer switch, and nightlight wiring.

MOUNTING: Visible flange mounting offers a 3/8" visible flange integral to the extruded luminaire body. Spackle flange option also available. Not suitable for vertical mounting.

FINISHES: Finelite Signal White powder coat standard. Optional Adders: 185 Tiger Drylac's non-metallic RAL colors. Primer undercoat standard on IP65 HP4-WL.

LENGTHS: 2', 3', 4', 5', 6', 7', and 8' section lengths. Independent and continuous rows available.

LABELS: Fixture and electrical components are ETL-listed conforming to UL 1598 in the U.S.A. and CAN/CSA C22.2 No. 250.0 in Canada. In accordance with NEC Code 410.73 (G), this luminaire contains an internal driver disconnect. UL wet location listed and IP65 and IK10 rated. Finelite products use electronic components that are RoHS compliant, and the mechanical components of the luminaire have been verified to not knowingly contain any restricted substances listed per RoHS Directive 2011/65/EU. Not suitable for vertical mounting.

WEIGHT: 3.60 lb/ft.

WARRANTY: 5-year performance-based warranty on all standard components.