





# FINELITE

## High Performance Recessed (HPR LED) 2x2, Air Return, Standard Output (S), Boosted Standard Output (B)

### DOOR STYLES

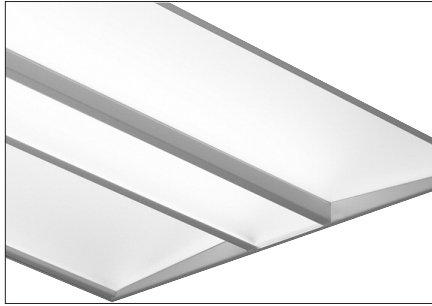

**A - Angled**

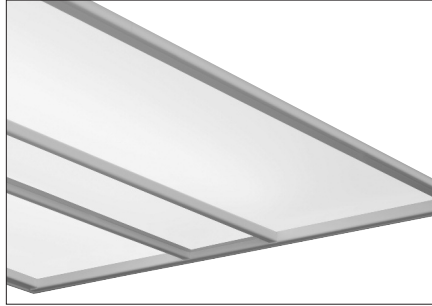

**F - Flat**

### CENTER OPTICS



**DCO - Diffuse Center**



**SCO - Slotted Center**




**RCO - Round Center**

# FINELITE

## High Performance Recessed (HPR LED) 2x2, Air Return, Standard Output (S), Boosted Standard Output (B)

### PHOTOMETRY

HPR LED-A-2x2-DC0-V  
 Boosted Standard Output - Angled Rail  
 Efficacy: 111 lumens per watt  
 Total luminaire output: 4367 Lumens  
 37.1 Watts  
 Peak Candela Value: 2574 @ 0°  
 CCT: 3500K  
 ITL LM79 Report 85142



CANDLEPOWER SUMMARY						
	0.0	22.5	45	67.5	ACROSS	Flux
0	2574	2574	2574	2574	2574	
5	2561	2561	2560	2559	2560	243
10	2519	2517	2515	2514	2514	
15	2440	2439	2441	2442	2444	688
20	2332	2333	2337	2344	2347	
25	2199	2199	2207	2217	2224	1016
30	2038	2040	2052	2070	2076	
35	1861	1863	1877	1900	1907	1175
40	1668	1671	1690	1713	1721	
45	1475	1473	1494	1517	1529	1154
50	1272	1272	1293	1314	1323	
55	1075	1074	1093	1109	1116	978
60	880	880	894	909	910	
65	693	696	702	712	718	699
70	519	519	524	532	537	
75	356	354	357	362	367	382
80	211	209	210	213	216	
85	90	87	85	83	85	101
90	0	0	0	0	0	

Angled (A) and Flat (F) Total Light Output, 3500K, 80 CRI (Lumens)	
<b>S*</b>	<b>B**</b>
3397	4367
Power, 3500K, 80 CRI (Watts)	
<b>S*</b>	<b>B**</b>
28.5	37.1
Efficacy, 3500K, 80 CRI (Lumens Per Watt)	
<b>S*</b>	<b>B**</b>
119	118

Lumen Adjustment Factors - 80 CRI	
<b>3000K</b>	0.985
<b>3500K</b>	1.000
<b>4000K</b>	1.032

Lumen Adjustment Factors - 90 CRI	
<b>3000K</b>	0.746
<b>3500K</b>	0.760
<b>4000K</b>	0.789

Apply a lumen adjustment factor to calculate lumens for the desired CCT and CRI.

\* Family Correlation based on 3500K Boosted Standard Output (B) test - 120V.  
 \*\* Based on source ITL report: 85142

**S - Standard Output, B - Boosted Standard Output**

### SAMPLE LUMEN ADJUSTMENT CALCULATION

Standard Output (S) Angled (A) Flat (F)  
 4000K, 90 CRI

Lumen Adjustment Factor = 0.789


Total Light Output =  
 3397 lm x 0.789 = 2680 lm

$$\text{Efficacy} = \frac{2680 \text{ lm}}{28.4 \text{ W}} = 94 \text{ lm/W}$$


# FINELITE

## High Performance Recessed (HPR LED) 2x2, Air Return, Standard Output (S), Boosted Standard Output (B)


### CEILING SYSTEM INFORMATION



9/16" T-Bar




15/16" T-Bar



Screw Slot T-Bar

### AIR HANDLING INFORMATION

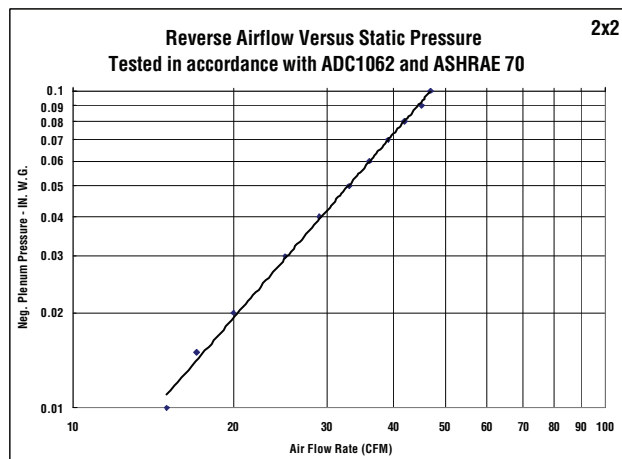

### SPECIFICATIONS

**CONSTRUCTION:** Die-formed 20-gauge cold-rolled steel housing. All components are hard-tooled to tolerances of +/- 0.010". UV stabilized weather-strip pile gasket with polypropylene backing. Hinged door frame assembly provides easy access to light arrays and driver compartment for servicing from below. Seismic brackets are integrated into the luminaire assembly. Additional wire entrances are positioned on the ends of the housing to allow easy wiring access for the installer.

**REFLECTORS:** Die-formed 20-gauge cold-rolled steel reflectors are finished in 96LG high reflectance matte white powder coat paint.

**OPTICAL SYSTEM:** Components include diffuser panels and a central optic element held in place with a frame constructed from die-formed cold-rolled steel. The diffusers are UV-stabilized and impact-resistant frosted virgin acrylic, 0.120" thick. They are either angled toward the central optic or parallel to the ceiling plane.

**CENTER OPTIC OPTIONS:** Only available with Angled (A) and Flat (F) door styles.

*Diffuse Center Optic (DCO): UV-stabilized and impact-resistant frosted virgin acrylic.*

*Slotted Center Optic (SCO): Die-formed cold-rolled steel panel with a 1/16" x 1/2" rectangular hole pattern. Virgin acrylic overlay.*

*Round Center Optic (RCO): Die-formed cold-rolled steel panel with precision-punched 3/32" round hole pattern arranged in staggered formation. Virgin acrylic overlay.*

**LIGHT OUTPUT:** Two lumen packages available, Standard (S), Boosted Standard (B). A separate chart summarizes lumen distribution and wattage. Light engines are replaceable.

**LUMEN MAINTENANCE:** 90% of initial light output (L90) at 100,000+ hours; 70% of initial light output (L70) at 200,000+ hours.

**DRIVER:** Replaceable 120V/277V Constant Current Reduction dimming driver standard. Can be wired dimming or non-dimming. 0-10V dimming controls with a range of 10%- 100%. Driver is fully accessible from below the ceiling. Power Factor: ≥0.9. Total Harmonic Distortion (THD): <20%. Expected driver lifetime: 100,000 hours.

**LUTRON DRIVER OPTIONS:** LUTES1 (Hi-lume 1% EcoSystem with Soft-On, Fade to Black dimming (LDE1 series)); LUTES5 (5-Series 5% EcoSystem (LDE5 Series)), LUT2W (Hi-lume 1% 2-wire, 120V forward phase dimming (LTEA series)); Contact factory for availability of discontinued Lutron drivers, L3DA-3-wire and L3DA EcoSystem.

**ELECTRICAL:** Factory-choice low-profile backup battery available. Bodine BSL722 battery pack also available. Chicago Plenum option. Backup batteries deliver 2199 lumens. One half of the 2x2 will be illuminated in emergency mode.

**MOUNTING:** Standard flange design works with most lay-in ceiling types. Integral pry-out tabs secure the luminaire to the ceiling grid from above. Tie-in locations for tie-wire on all corners. Consult local code for appropriate tie-wire recommendations. Drywall Kit available. Surface mount version available; see separate tech sheet.

**AIR RETURN:** Luminaire tested in accordance with ADC1062 and ASHRAE 70. Air Return slots positioned on the center optic. Diffuse Center Optic (DCO) is placed above the air return slots. Other center optics are positioned below the air return slots.

**FINISH:** Housing and door assembly painted with 96 LG high reflectance matte white powder coat paint. Available in matte white only. Optional adder: Anti-microbial paint. Contact factory.

**FEED:** Optional whips (with flex connectors) supplied in a maximum of 11' lengths. Lead Wires.

**LABELS:** Luminaire and electrical components are ETL-listed conforming to UL 916, 1598, 8750, 924 in the U.S.A. and CAN/CSA C22.2 No. 205, 250, and 141 in Canada. In accordance with NEC Code 410.73 (G), this luminaire contains an internal driver disconnect. Damp Location. Finelite products use electronic components that are RoHS compliant, and the mechanical components of the luminaire have been verified to not knowingly contain any restricted substances listed per RoHS Directive 2011/65/EU. Finelite makes the specification process easy when putting healthier products on your projects. Simply add – RLA (Red List Approved) or – RLD (Declared Label) to your part number.

**WEIGHT:** 16 lbs maximum.

**WARRANTY:** 10-year performance-based warranty on all standard components. Optional accessories such as emergency battery packs are covered by their individual manufacturer warranties.

A brand of 

Finelite, Inc. • 30500 Whipple Road • Union City, CA 94587-1530 • (510) 441-1100 • Fax: (510) 441-1510 • www.finelite.com

Due to continuing product improvements, Finelite reserves the right to change specifications without notice. Please visit www.finelite.com for most current data.