


# FINELITE

## Tunable White High Performance Recessed (HPR LED-EP) 2x4

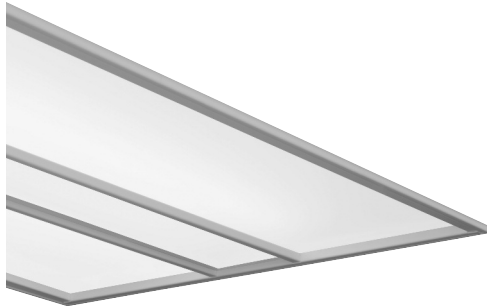

Refer to page 3 for all door styles

### DESCRIPTION

HPR LED-EP is a recessed luminaire delivering excellent visual comfort and outstanding performance. This luminaire features very uniform illumination of the diffusers. Advanced optical design make HPR LED-EP a powerful solution for low-ceiling applications. This Product is enrolled in the International Living Future Institute (ILFI) Declare 2.0 Program and is third-party verified with options achieving Red List Approved and Declared status.

Date


Project

Type

Comments

### ORDERING GUIDE

Sample Number: HPR LED-EP - A - 2x4 - DCO - B - 8TW - 277V - SC - C1 - RLA

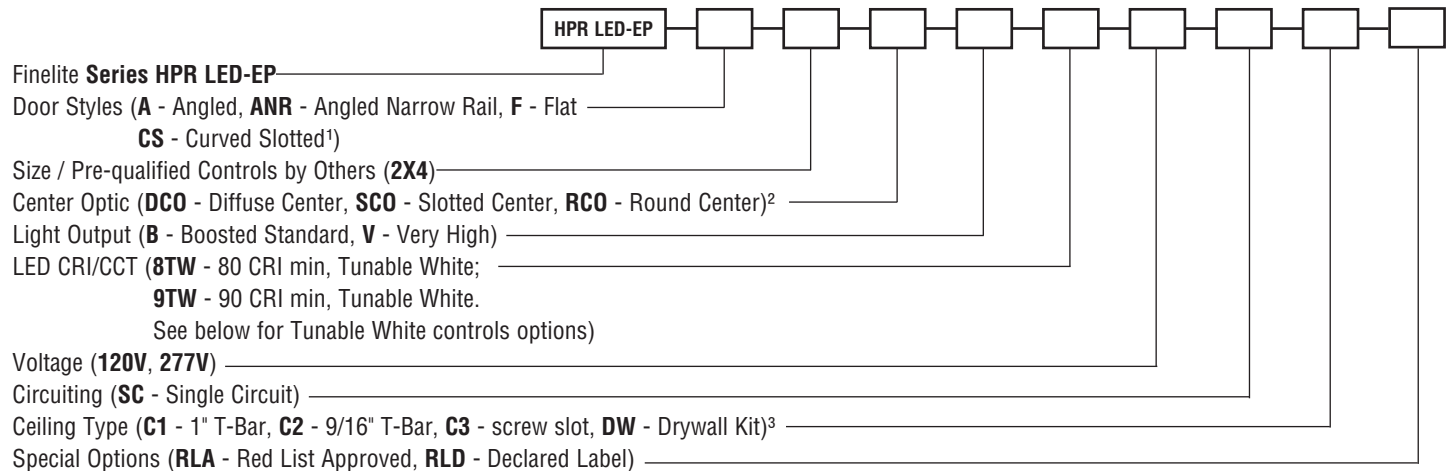

<sup>1</sup> Curved Slotted door not available with Center Optic options  
<sup>2</sup> Only available on Angled (A), Angled Narrow Rail (ANR), and Flat (F) door options  
<sup>3</sup> Surface Mount available

### TUNABLE WHITE CONTROLS OPTIONS: SELECT ONE



FineTune controller with FineTune DMX Driver

OR

- Controls by others with pre-qualified DMX driver
- Controls by others with pre-qualified DALI driver
- Controls by others with pre-qualified PoE setup
- Controls by Lutron with pre-qualified Lutron driver

A brand of Legrand



Finelite, Inc. • 30500 Whipple Road • Union City, CA 94587-1530 • 510 / 441-1100 • Fax: 510 / 441-1510 • www.finelite.com

Due to continuing product improvements, Finelite reserves the right to change specifications without notice. Please visit www.finelite.com for most current data.

# FINELITE

## Tunable White High Performance Recessed (HPR LED-EP) 2x4

### LUMINAIRE FEATURES

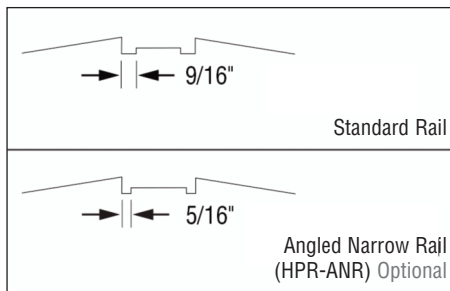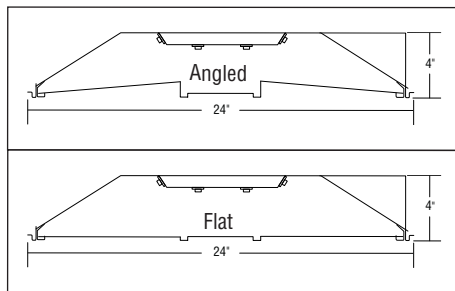

### DIMENSIONS



### NARROW RAIL OPTION

The available angled door style with the same center optic choices. The optional narrow rails are approximately 5/16" wide. The standard center rails are approximately 9/16" wide.

### 100 % SERVICEABLE FROM BELOW

The replaceable light engine and driver are easy to access from below the ceiling.

### TUNABLE WHITE FEATURES

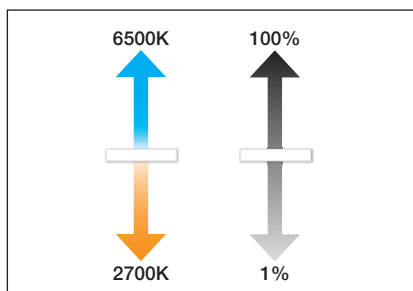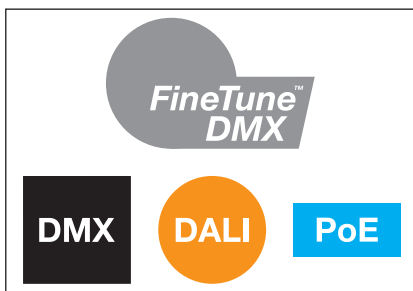

### MULTIPLE CONTROL ARCHITECTURES

Finelite's FineTune™ DMX, qualified DMX, DALI (open and proprietary), or PoE (Power over Ethernet).


### TUNABLE WHITE

Any CCT between 2700K and 6500K with excellent CRI and R9 values; dimming from 100% to 1%.

### FINETUNE SYSTEM

Award-winning control system, which includes intuitive wall mounted controller, power control center, driver, and mobile app to easily tailor lighting to match user preference.


### DMX CONNECTION

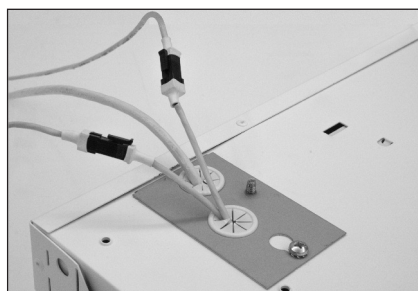


# FINELITE

## Tunable White High Performance Recessed (HPR LED-EP) 2x4


### DOOR STYLES

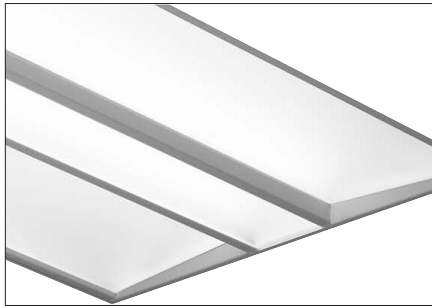

**A - Angled**  
**ANR - Angled Narrow Rail**

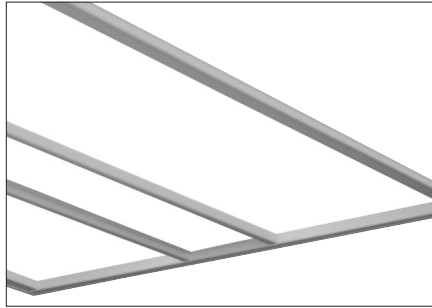

**F - Flat**

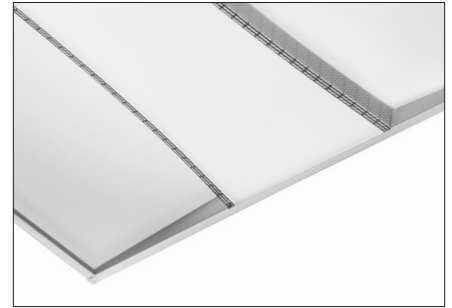

**CS - Curved Slotted**

### CENTER OPTICS



**DCO - Diffuse Center**



**SCO - Slotted Center**



**RCO - Round Center**


DCO, SCO, and RCO are only available on Angled (A), Angled Narrow Rail (ANR), and Flat (F) doors.

# FINELITE

## Tunable White High Performance Recessed (HPR LED-EP) 2x4

### PHOTOMETRY

HPR LED-EP-A-2x4-DCO-V  
 Very High Output - Flat Rail  
 Total Luminaire Output: 6444 Lumens  
 Peak Candela Value: 2373 @ 0°  
 CCT: 3500K  
 ITL LM79 Report: 85146



CANDELA DISTRIBUTION						
	0.0	22.5	45	67.5	ACROSS	Flux
0	2373	2373	2373	2373	2373	
5	2362	2362	2361	2361	2361	224
10	2323	2325	2324	2324	2326	
15	2261	2261	2263	2263	2262	638
20	2177	2178	2178	2178	2178	
25	2073	2073	2073	2074	2073	955
30	1951	1950	1950	1952	1950	
35	1814	1814	1816	1815	1815	1135
40	1666	1667	1666	1666	1669	
45	1507	1506	1504	1504	1506	1160
50	1336	1335	1333	1332	1337	
55	1160	1158	1155	1150	1146	1031
60	975	972	968	962	958	
65	792	788	777	770	771	770
70	600	596	585	577	575	
75	413	408	397	391	390	424
80	239	234	227	223	222	
85	92	90	87	85	84	105
90	0	0	0	0	0	

Angled (A) and Flat (F) Total Light Output, 3500K, 80 CRI (Lumens)	
<b>B*</b>	<b>V**</b>
4379	6444
Power, 3500K, 80 CRI (Watts)	
<b>B*</b>	<b>V**</b>
38.7	60.6
Efficacy, 3500K, 80 CRI (Lumens Per Watt)	
<b>B*</b>	<b>V**</b>
113	106

\* Family Correlation based on 3500K 80 CRI Very High Output (V) test - 120V.  
 \*\* Based on ITL report: 85146

Lumen Adjustment Factors - 80 CRI	
<b>2700K</b>	0.968
<b>3000K</b>	0.985
<b>3500K</b>	1.000
<b>4000K</b>	1.032
<b>6500K</b>	1.032

Lumen Adjustment Factors - 90 CRI	
<b>2700K</b>	0.731
<b>3000K</b>	0.746
<b>3500K</b>	0.760
<b>4000K</b>	0.789
<b>6500K</b>	0.789

Apply a lumen adjustment factor to calculate lumens for the desired CCT and CRI.

Angled Narrow Rail (ANR) Total Light Output, 3500K, 80 CRI (Lumens)	
<b>B*</b>	<b>V<sup>¥</sup></b>
4586	6749
Power, 3500K, 80 CRI (Watts)	
<b>B*</b>	<b>V<sup>¥</sup></b>
38.8	60.7
Efficacy, 3500K, 80 CRI (Lumens Per Watt)	
<b>B*</b>	<b>V<sup>¥</sup></b>
118	111

**B - Boosted Standard Output, V - Very High Output**

\* Family Correlation based on 3500K 80 CRI Very High Output (V) test - 120V.  
 ¥ Based on ITL report: 85152

### SAMPLE LUMEN ADJUSTMENT CALCULATION

$$\frac{\text{Boosted Standard Output (B)}}{\text{Angled (A) \& Flat (F)}} \times \frac{\text{4000K, 90 CRI}}{\text{4000K, 90 CRI}}$$

$$\text{Lumen Adjustment Factor} = 0.789$$

$$\text{Total Light Output} = 4379 \text{ lm} \times 0.789 = 3455 \text{ lm}$$

$$\text{Efficacy} = \frac{3455 \text{ lm}}{38.7 \text{ W}} = 89 \text{ lm/W}$$

# FINELITE

## Tunable White High Performance Recessed (HPR LED-EP) 2x4

### SPECIFICATIONS

**CONSTRUCTION:** Die-formed 20-gauge cold-rolled steel housing. All components are hard-tooled to tolerances of +/- 0.010". UV stabilized weather-strip pile gasket with polypropylene backing. Hinged door frame assembly provides easy access to light arrays and driver compartment for servicing from below. Seismic brackets are integrated into the luminaire assembly. Additional wire entrances are positioned on the ends of the housing to allow easy wiring access for the installer.

**REFLECTORS:** Die-formed 20-gauge cold-rolled steel reflectors are finished in 96LG high reflectance matte white powder coat paint.

**AIR RETURN:** Refer to HPR LED-EP 2x4 Air Return Tech Sheet for more information.

**OPTICAL SYSTEM:** Components include diffuser panels and a central optic element held in place with a frame constructed from die-formed cold-rolled steel. The diffusers are UV-stabilized and impact-resistant frosted virgin acrylic, 1/8" thick. They are either angled toward the central optic or parallel to the ceiling plane. The standard center rails are approximately 9/16" wide. Optional narrow rails are approximately 5/16" wide.

**DOOR STYLE:** *Curved Slotted (CS)* includes perforated rails that slope inward and a diffuse frosted acrylic center optic.

**CENTER OPTIC OPTIONS:** Only available with *Angled (A)*, *Angled Narrow Rail (ANR)*, and *Flat (F)* door styles.

*Diffuse Center Optic (DCO):* UV-stabilized and impact-resistant frosted virgin acrylic.

*Slotted Center Optic (SCO):* Die-formed cold-rolled steel panel with a 1/16" x 1/2" rectangular hole pattern. Virgin acrylic overlay.

*Round Center Optic (RCO):* Die-formed cold-rolled steel panel with precision-punched 3/32" round hole pattern arranged in staggered formation. Virgin acrylic overlay.

**LIGHT OUTPUT:** Two lumen packages available, Boosted Standard (B) and Very High (V). A separate chart summarizes lumen distribution and wattage. Light engines are replaceable.

**LUMEN MAINTENANCE:** 90% of initial light output (L90) at 100,000+ hours; 70% of initial light output (L70) at 200,000+ hours.

**TUNABLE WHITE DRIVER:** Replaceable LED driver accessible from below the ceiling. 120/277V. Power factor ≥0.90. Total Harmonic Distortion (THD): <20%. Dimming Range: 100% - 1%. Expected driver lifetime: 100,000 hours.

**LUTRON DRIVER OPTIONS:** LutDTW (1% T-Series 2-Channel Digital Tunable White (PSQ Series)).

#### ELECTRICAL:

Emergency Option DMX: Battery backup only.

Emergency Option DALI: Battery backup, emergency-to-generator/ inverter wiring.

Emergency Option Lutron: Battery backup, emergency-to-generator/ inverter wiring.

Emergency Option PoE: Contact factory.

Battery Backup: Factory-choice low-profile backup battery available. Backup batteries deliver 2305 lumens. One quarter of the 2x4 will be illuminated in emergency mode. Backup battery will operate at 6500K in emergency.

Chicago Plenum: Available on request.

**MOUNTING:** Standard flange design works with most lay-in ceiling types. Integral pry-out tabs secure the luminaire to the ceiling grid from above. Tie-in locations for tie-wire on all corners. Consult local code for appropriate tie-wire recommendations. Drywall and Surface Mount versions available; refer to separate tech sheets.

**DMX INTERCONNECTION CABLES:** Luminaires are prewired with plug-and-play interconnection cables to support easy plug-together joining of luminaire runs. If a non-FineTune DMX system has been specified, a DMX to RJ45 converter is provided.

**FINISHES:** Housing and door assembly painted with 96 LG high reflectance matte white powder coat paint. Optional adder: Anti-microbial paint. Contact factory.

**FEED:** Standard with one 18-gauge single-circuit feed. 14-gauge feed available on request. DMX and power feed at same location (standard). Optional whips (with flex connectors) supplied in a maximum of 11' lengths. Lead Wires. DMX feeds cannot be cut or spliced. DMX feeds should be ordered based on fixed lengths.

**LABELS:** Luminaire and electrical components are ETL-listed conforming to UL 916, 1598, 8750, 924 in the U.S.A. and CAN/CSA C22.2 No. 205, 250, and 141 in Canada. In accordance with NEC Code 410.73 (G), this luminaire contains an internal driver disconnect. Damp Location. IC-rated. Finelite products use electronic components that are RoHS compliant, and the mechanical components of the luminaire have been verified to not knowingly contain any restricted substances listed per RoHS Directive 2011/65/EU. Finelite makes the specification process easy when putting healthier products on your projects. Simply add – **RLA** (Red List Approved) or – **RLD** (Declared Label) to your part number.

**WEIGHT:** 33 lbs maximum.

**WARRANTY:** 10-year performance-based warranty on all standard components. Qualified drivers by others and optional accessories such as emergency battery packs are covered by their individual manufacturer warranties.

#### TUNABLE WHITE PRE-QUALIFIED DRIVERS BY OTHERS

DMX	DALI	POE set up	LUTRON
EldoLED	EldoLED, Crestron	Contact Factory	LUTRON

NOTE: For a complete list of system option/limitations [please click here](#).