


Recessed Mounting and Feed Guide HPX




FINELITE®
Better Lighting


Customer: _____ Job: _____ PO: _____

RECESSED MOUNTING OPTIONS


1" T-Bar (C1)




9/16" T-Bar (C2)




STANDARD SCREW SLOT (C3)



SPACKLE FLANGE (SF)

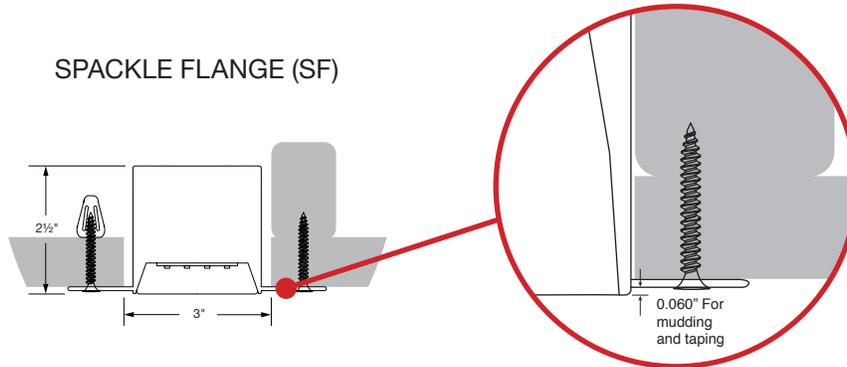


Version 3



Ceiling Options
C1, C2, C3


Version 4

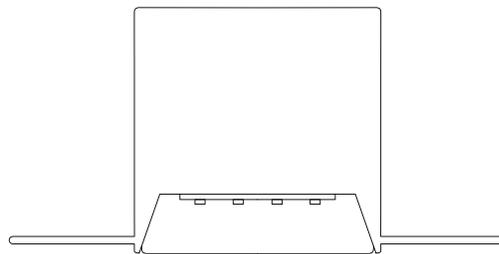

Ceiling Options
SF


© 2020 FINELITE, INC. ALL RIGHTS RESERVED CPG0106, V2 05/20

Recessed Mounting and Feed Guide HPX



FINELITE®
Better Lighting


Customer: _____ Job: _____ PO: _____

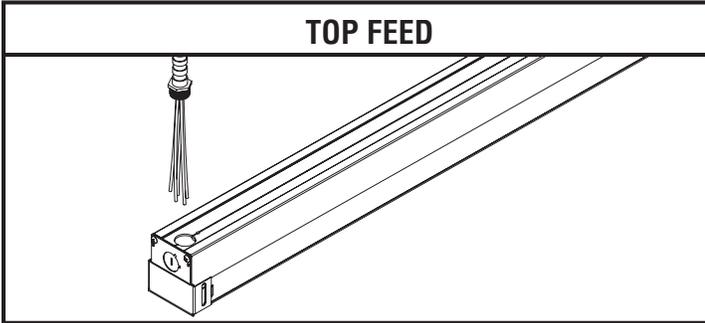


LENGTHS

Minimum 2' section length. Increments of 1'; 12' maximum section length

Recessed T-Bar Luminaire Lengths (C1, C2, C3)

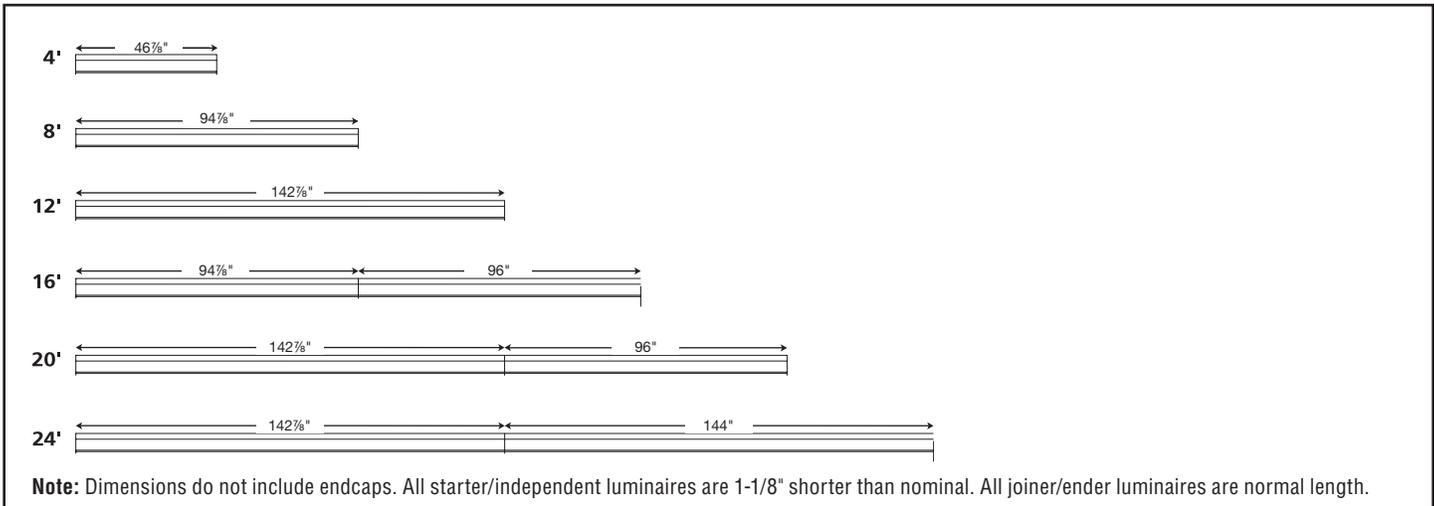

Recessed Non-T-Bar Support Locations (SF)

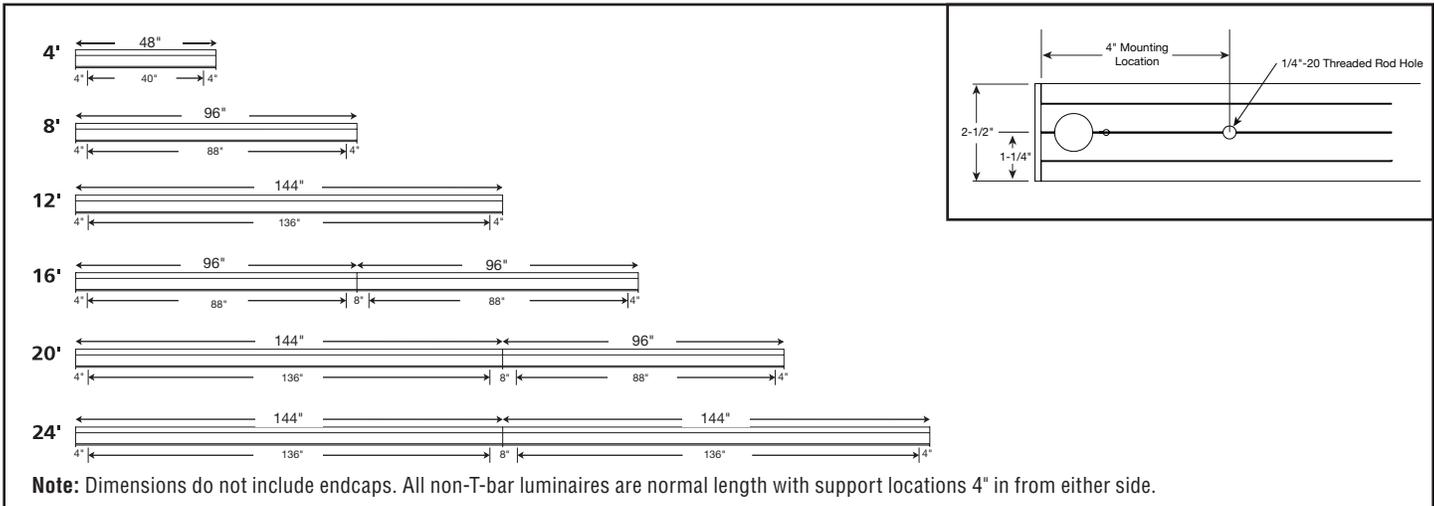

© 2020 FINELITE, INC. ALL RIGHTS RESERVED CPG0106_V2 05/20