

Personal Task Lighting For Your Application. Sleek Profile. Breakthrough Performance.













The energy-efficient Edge by Finelite™creates the ideal visual balance for your space using the latest LED technology.

Edge by FineliteTM creates the ideal visual balance for your space using the latest LED technology. It delivers the right amount of task illumination for a fraction of the energy required by conventional undercabinet luminaires. Use it to create pleasant and sustainable work areas that allow the occupant to be in control.

Innovative features

- Complies with the Buy American Act of 2009
- Part of the PLS family of products
- Up to 62 lumens per watt
- Effective cable management hardware
- Complies with FCC requirements for commercial and residential use
- 3500K warm white LEDs
- Replaceable LED assembly
- 5 year, worry-free warranty





Powerful Magnets Powerful rare earth magnets allow for easy, yet secure mounting to metal surfaces.





Diffuser

Frosted diffuser covers the LEDs for improved distribution, minimizes multiple shadow effects, and is easy to clean for applications requiring periodic wipe down.



On-Board Dimming To Off Edge comes equipped with individual dimming to off on each luminaire.



Power Supplies

Available with 8W, 21W, or 60W power supplies to meet a variety of application needs. Edge is ENERGY STAR® qualified when using one 22" unit or two 12" units on an 8W power supply.








Occupancy Sensor

Reduce plug-load even further using the optional occupancy sensor which turns off all luminaires connected to the 21W or 60W power supply when the space is unoccupied.



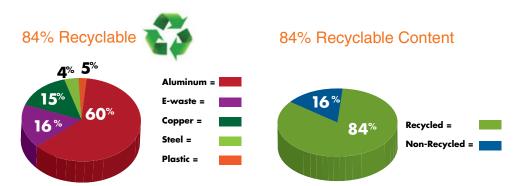

Edge components are constructed from aluminum, copper, steel, electronic, and plastic. Edge by Finelite is 84% recyclable at the end of useful life.

Individual or System Edge fully integrates with the Personal Lighting System (PLS) solution.



NEW

en po

Light Engine


Edge uses mid-powered LEDs spaced uniformly for even distribution on the task plane.

Cable Management


Fixtures can be mounted to steel or wood for easy cable management.







Performance





UC-E - 22" - S - PS-21W - OCC

Superior lateral throw provides proper illumination over a wide area. Example above: 22" unit installed on a 4' binder bin. One 22" Edge provides ample illumination beneath a 4' binder area.

(For additional output specify a 45" luminaire rather than two 22" luminaires.)

Technical Specifications

- Efficacy (Lumens per Watt): 22": 62.2 / 12": 48.9
- Light Output (Lumens): 22": 380 / 12": 196
- Power Consumption: 22": 6.1W / 12": 4W
- Color Temperature: 3500K
- Color Rendering (CRI): 87
- R9 Value: 22": 32 / 12": 34
- L₉₀: Rated for 100,000 hours to 90% of initial lumens*
- LM-79 tested and LM-80 data is available
- Complies with FCC requirements for commercial and residential use
- Compatible with Personal Lighting System (PLS)
- End of life statement: 84% recyclable at the end of its useful life
- ETL Listed
- RoHS Compliant

* L₉₀ lifetime is estimated by the LED manufacturer based on independent testing of the Edge luminaire.

Ordering Information

Lamp (UC-E)]		
Length (12", 22", and 45")			
Finish (Silver)			
Power Supply (PS-8W, PS-21W, PS-60W) -			
Occupancy Sensor (OCC)			

Finelite, Inc. • 30500 Whipple Rd • Union City, CA 94587-1530 • 510-441-1100 • 510-441-1510 • www.finelite.com ©2014 Finelite Inc. All rights reserved. CPI0046 01/14