


Submitted by:		Date:
Type:	Project:	
Ordering Info:		

High Performance 2" Aperture (HP-2) Surface Mount

T-Bar Surface Mount

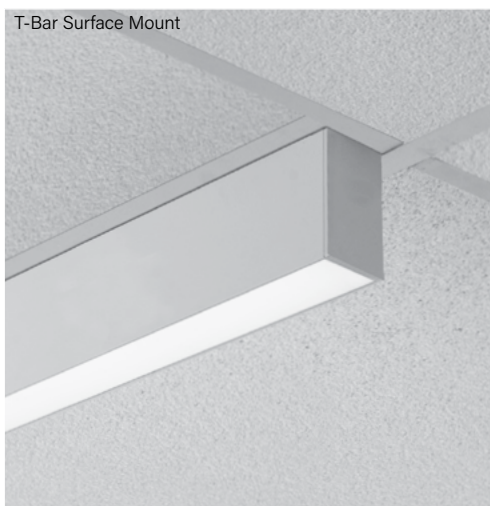

Wall Wash Surface Mount



High Performance 2" Aperture is a patented, linear LED luminaire family. HP-2 delivers excellent performance using an advanced optical design and mid-power LEDs. Achieving 90% of initial light output at 100,000+ hours and backed by a 10-year performance-based warranty on all standard components.


This product is enrolled in the International Living Future Institute (ILFI) Declare 2.0 Program and is third-party verified with options achieving **Red List Approved** and **Red List Declared** status.

Signal White is standard finish

Note: see page 6 for all aesthetic options


CROSS SECTIONS

Surface Mount




Flush Downlight Diffuser (standard)

Surface Mount Regressed




Flat Diffuser with 1" Regressed (RG)

Wall Wash Surface Mount




Kicker (standard)


OPTIC OPTIONS



Downlight Asymmetric Optic (DAO)



Downlight Spread Optic (DSO)



Standard Downlight Flush Optic (F)

ALSO AVAILABLE IN



Pendant (D, ID, I)



Wall Mount (WM)



Recessed (R)



Declare.



Submitted by:		Date:
Type:	Project:	
Ordering Info:		

High Performance 2" Aperture (HP-2) Surface Mount

Ordering Guide Example: HP - 2 - SM - D - 36' - S - 835 - F - 96LG - 120 - SC - FC-10% - FA50 - C1 - FE - SW - LGD18W - OBO - CP

BODY TYPE				OUTPUT AND LED TYPE	
Platform	Series Name	Luminaire Type	Luminaire Distribution	Total Length of Run	Downlight Output (Flush)
HP - High Performance	2	SM - Surface Mount SM RG - Direct Regressed (Wall Wash not available)	D - Direct WW-D - Wall Wash Direct	Minimum 2'section length. Increments accurate to 1/16" (±1/32"), standard. 12' maximum section length.	S - Standard (329 lm/ft) B - Boosted (414 lm/ft) H - High (625 lm/ft) V - Very High (804 lm/ft) TL - Tailored: _____ lm/ft* <small>Lumen provide are for Flush lens only, see pg. 9 for WW lumens * Specify Tailored lm/ft of outputs between Standard (S) and Very High (V). Consult factory for tailored lumen output outside of this range.</small>

OUTPUT AND LED TYPE		MECHANICAL/OPTICAL OPTIONS		ELECTRICAL OPTIONS	
LED CRI/CCT	Downlight	Reflector System	Voltage	Circuiting ³	
830 - 80 CRI, 3000K 835 - 80 CRI, 3500K 840 - 80 CRI, 4000K 930 - 90 CRI, 3000K 935 - 90 CRI, 3500K 940 - 90 CRI, 4000K 8TW - 80 CRI, Tunable White 9TW - 90 CRI, Tunable White	F - Flush (standard) ¹ BG - Bottom Glow ¹ DL - 1" Drop Down Lens ¹ RG-D - Flat Diffuser with 1" Regress ² RG-WCB - White Cross Blade Baffle ² RG-LHE - Hollowed Ellipse Louver ² RG-LHC - Hex Louver ² DAO-L - Downlight Asymmetric Optic Left ^{1,5} DAO-R - Downlight Asymmetric Optic Right ^{1,5} DSO - Downlight Spread Optic ^{1,5} K - Kicker for Wall Wash only (standard) ⁶ FO - Fully Open for Wall Wash only	96LG - 96 Low Gloss White SW - Signal White for Wall Wash only	120 - 120 Voltage 277 - 277 Voltage 347 - 347 Voltage (OTi only)	SC - Single Circuit* One single circuit in a run MC - Multi-Circuit* More than one switch leg or zone. Factory shop drawings required * Battery, Night Light, and Emergency to Generator circuits are in addition to the normal luminaire circuit(s)	

ELECTRICAL OPTIONS	
Driver Selection	
0-10V Driver Options FC-10% - 0-10V 10% (standard) FC-1% - 0-10V 1% OTi-10% - EldoLED OTi, 0-10V 10% ⁴ OTi-1% - EldoLED OTi, 0-10V 1% ⁴ ELD-10V-0% - EldoLED SOLOdrive, 0-10V 0.1% 10V-TW-10% - EldoLED OTi, 0-10V 10% (Tunable White) ⁴ DALI Driver Options FC-DALI-1% - DALI 1% DXL-DALI-1% - EldoLED Dexal, 1% ELD-DALI-0% - EldoLED SOLOdrive, 0.1% ELD-DALI-TW - EldoLED DUALdrive LightShape, 0.1% (Tunable White)	DMX Driver Options ELD-DMX - EldoLED POWERdrive, 0.1% ELD-DMX-TW - EldoLED POWERdrive, 0.1% (Tunable White) Lutron Driver Options LUT-ES1 - Lutron, Ecosystem 1% LUT-TW - Lutron LD2 Dali-2 1% (Tunable White) See Page 3 for additional driver options and details

MOUNTING OPTIONS		OTHER OPTIONS	
Ceiling Hardware Type	Endcap Style	Finish	
C1 - 15/16" T-Bar C2 - 9/16" T-Bar C3 - Screw Slot C4 - Hard Ceiling	FE - Flat Endcap (standard) DE - 1" Drop Endcap ⁸ OE - Open Endcap ⁹	SW - Signal White (standard) FB - Finelite Black SA - Satin Aluminum #### - RAL Color Code ¹⁰ _____	

Emergency Style (Optional) <small>See page 5 Backup Battery table</small>	Integrated Sensor (Optional) ¹¹		Special Options (Optional)
LGD18W - Legrand 18W Brand Battery Back-up LGD10W - Legrand 10W Brand Battery Back-up EM/GN - Emergency to Generator NL - Night Light BSL310LP - Bodine Battery Back up Low Profile BSL10T3 - Bodine Battery Back up Low Profile Compact GTD - Generator Transfer Device ALCR - Automatic Load Control Relay	OBO - Occupancy ¹² OBD - Daylight ¹² W601 - Wattstopper Wireless Sensor ¹³ OBE - Enlghted ¹⁴ REE - Remote Enlghted ¹⁵ CLM - Encelium RF SLM - Encelium Sensor	AOCC-W - Lutron Athena Sensor (Device Color White) ¹⁶ AOCC-B - Lutron Athena Sensor (Device Color Black) ¹⁶ ARF-W - Lutron Athena RF (Device Color White) ¹⁶ ARF-B - Lutron Athena RF (Device Color Black) ¹⁶ VOCC - Lutron Vive Wireless Sensor (VDO) ¹⁷ VRF - Lutron Vive Radio Only ¹⁷	CP - Chicago Plenum ¹⁸ RLA - Red List Approved RLD - Red List Declared

¹ Not available with Wall Wash

² Regressed only

³ Contact factory for switching options

⁴ Add DTO to gain "Dim to Off" functionality (FC-10% - DTO, FC-1% - DTO)

⁵ Not available with Regressed or Curves

⁶ Kicker standard in Signal White. Customer Custom color Kickers have a surcharge

⁷ B & V outputs only

⁸ 1" Drop Down Lens downlight only

⁹ Available with Hollowed Ellipse Louver (LHE) only

¹⁰ 20 business days lead time for color

¹¹ Minimum fixture length with a sensor is 3ft.

¹² Not available with Wall Wash

¹³ LMFS-601 w/ 0-10V driver(s) and LMFI-111, up to 6 drivers may be connected.

¹⁴ LMFS-601 w/ Dali driver, only 1 driver can be connected.

¹⁵ Enlghted components installed by Finelite, provided by others

¹⁶ Enlghted for Wall Wash fixtures. Enlghted Control Unit & Sensor Cable installed for Remote mounting sensor.

¹⁷ 0-10V Drivers - AOCC up to 10 drivers may be connected; ARF up to 40 drivers may be connected

DALI Drivers - AOCC & ARF up to 4 drivers can be connected.

¹⁸ Lutron Vive Ingrated Sensors require a DALI driver

¹⁹ Only available with C1, C2, and C3 mounting hardware with Finelite Gridbox

Submitted by:		Date:
Type:	Project:	
Ordering Info:		

High Performance 2" Aperture (HP-2) Surface Mount

SUPPLEMENTARY DRIVER PAGE

0-10V Driver Options

FC-10%	Factory Choice, 0-10V 10% Dimming (Linear)
FC-10%-DTO	Factory Choice, 0-10V 10% Dimming, Dim-to-Off (Linear)
FC-1%	Factory Choice, 0-10V 1% Dimming (Linear)
FC-1%-DTO	Factory Choice, 0-10V 1% Dimming, Dim-to-Off (Linear)
ELD-10V-0%	EldoLED SOLOdrive, 0-10V 0.1% Dimming (Linear)
ELD-10V-1%	EldoLED ECOdrive, 0-10V 1% Dimming (Linear)
10V-TW-10%	EldoLED OTi, 0-10V 10% Dimming, Tunable White (Linear)
10V-TW-10%-DTO	EldoLED OTi, 0-10V 10% Dimming, Dim-to-Off, Tunable White (Linear)
OTi-10%	EldoLED OTi, 0-10V 10% Dimming (Linear)
OTi-10%-DTO	EldoLED OTi, 0-10V 10% Dimming, Dim-to-Off (Linear)
OTi-1%	EldoLED OTi, 0-10V 1% Dimming (Linear)
OTi-1%-DTO	EldoLED OTi, 0-10V 1% Dimming, Dim-to-Off (Linear)

DALI Driver Options

FC-DALI-1%	Factory Choice, DALI 1% Dimming (Logarithmic)
DXL-DALI-1%	EldoLED Dexal, DALI 1% Dimming (Logarithmic)
ELD-DALI-0%	EldoLED SOLOdrive, DALI 0.1% Dimming (Logarithmic)
ELD-DALI-1%	EldoLED ECOdrive, DALI 1% Dimming (Logarithmic)
ELD-DALI-TW	EldoLED DUALdrive Light Shape, DALI 0.1% Dimming, Tunable White (Logarithmic Dimming, Linear CCT Control)

DMX Driver Options

ELD-DMX	EldoLED POWERdrive, DMX 0.1% Dimming (8 Bit, 1CH) (Linear)
ELD-DMX-16	EldoLED POWERdrive, DMX 0.1% Dimming (16 Bit, 2CH) (Linear)
ELD-DMX-TW	EldoLED POWERdrive, DMX 0.1% Dimming, Tunable White (8 Bit, 2CH - CH1 Warm / CH2 Cool) (Linear)
ELD-DMX-TW16	EldoLED POWERdrive, DMX 0.1% Dimming, Tunable White (16 Bit, 4CH - CH1, 2 Warm / CH3, 4 Cool) (Linear)

Lutron Driver Options

LUT-ES1	Lutron, Ecosystem 1% Dimming
LUT-TW	Lutron LD2 Dali-2 1%, Tunable White

Submitted by:		Date:
Type:	Project:	
Ordering Info:		

High Performance 2" Aperture (HP-2) Surface Mount

SPECIFICATIONS

BODY TYPE

CONSTRUCTION: Precision-cut 6063-T6 extruded aluminum body. Internal joiner system and plug-together wiring are standard.

LENGTHS: Any length, 2' minimum, in increments down to 1/16th" ($\pm 1/32"$). 12' maximum section length. Hollowed Ellipse Louver (**LHE**), Hex Louver (**LHC**), and White Cross Blade Baffle (**WCB**) are available in 1' increments.

MITERED CORNERS¹: Illuminated corners of greater than 60° and less than 180° in a single plane, available with Flush Diffuser, Bottom Glow Diffuser, Regressed Diffuser, or White Cross Blade Baffle². Corners not available with Wall Wash (**WW-D**), Hollowed Ellipse Louver (**LHE**), Hex Louver (**LHC**) or 1" Drop Down Lens. Contact factory for Double miters using the White Cross Blade Baffle. Consult factory for tailored lighting options.

OUTPUT AND LED TYPE

LIGHT OUTPUT: Four lumen packages available, Standard (**S**), Boosted Standard (**B**), High (**H**), and Very High (**V**). For lengths 3' and greater, the uplight and downlight can be specified with different lumen packages and dual controls. For Tailored Outputs outside of range from Standard (**S**) to Very High (**V**), consult factory. Light engines are replaceable.

MECHANICAL/OPTICAL OPTIONS

DOWNLIGHT OPTION: 12' maximum diffuser length. Flush frost white snap-in diffuser standard, 73% transmissive, 99% diffusion. Internal secondary diffusers at corners ensure visually seamless, uniform, continuous illumination. Available with Flush (**F**), Bottom Glow (**BG**), 1" Drop Down Lens (**DL**), White Cross Blade Baffle (**WCB**)³, Ellipse Louver (**LHE**)³, Hex Louver (**LHC**)³, Downlight Asymmetric Optic (**DAO**)⁴, Downlight Spread Optic (**DSO**)⁴, and Regressed downlight diffusers (**RG**). 1" Drop Down Lens made of highly efficient acrylic. Available with a solid endcap or an endcap with a diffuse filler to continue the luminous aesthetic. Downlight Spread & Downlight Asymmetric Optics are extruded lenses with a subtle ribbed appearance providing a batwing or asymmetric distribution for improved optical performance. Consult factory for more tailored lumen outputs.

LUMEN MAINTENANCE: 90% of initial light output (L90) at 100,000+ hours; 70% of initial light output (L70) at 200,000+ hours.

REFLECTORS: Die-formed 20-gauge cold-rolled steel reflectors finished in 96LG High Reflectance white powder coat paint. The standard Semi-Specular Aluminum (**SSA**) Kicker (**K**) reflector delivers light high on the vertical surface. The Kicker reflector can be easily removed for open distribution (**FO**).

ELECTRICAL OPTIONS

STATIC WHITE FEED: Standard with one 18-gauge/5-conductor single-circuit feed controlling uplight and downlight together (power and dimming). Specify dual feeds for independent control of uplight and downlight. 14-gauge feed used when luminaire current exceeds 5 amps.

TUNABLE WHITE FEED: Standard with one 18-gauge/5-conductor single-circuit feed. 14-gauge feed used when fixture current exceeds 5 amps. DMX feeds cannot be cut or spliced. DMX feeds should be ordered based on fixed lengths.

0-10V:

- One 18-gauge / 3-conductor power
- One 18-gauge / 4-conductor for dimming and controls

Dali:

- One 18-gauge / 5-conductor power and controls

DMX:

- One 18-gauge / 3-conductor power
- One DMX feed

STATIC WHITE DRIVER: Replaceable 120V, 277V, and 347V Constant Current Reduction dimming driver standard. Can be wired dimming or non-dimming. 0-10V dimming controls with a range of 10%- 100% standard. Dimming to 1% available. Separate dimming for uplight and downlight available. Driver is fully accessible from below the ceiling.

- **Power Factor:** ≥ 0.9
- **Total Harmonic Distortion (THD):** <20%
- **Expected driver lifetime:** 100,000 hours

LUTRON DRIVER OPTIONS:

LUT-ES1 - Hi-lume 1% EcoSystem with Soft-On, Fade-to-Black dimming (LDE1 series).

TUNABLE WHITE DRIVER: Replaceable LED driver. Driver is accessible from below the ceiling. 120V and 277V.

- **Power factor:** ≥ 0.90
- **Total Harmonic Distortion (THD):** <20%
- **Dimming Range:** 100%-10%
- **Expected driver lifetime:** 100,000 hours

LUTRON TUNABLE WHITE DRIVER OPTION:

LUT-TW - Lutron LD2 Dali-2 1%, Tunable White.

MOUNTING OPTIONS

HANGING HARDWARE: Lay-in ceiling types: caddy clip with 1/4" - 20 stud and nut. Drywall or concrete surfaces (walls or ceilings): 1/4" - 20 stud and nut (provided by others). Mounted with three equidistant suspension points.

TUNABLE WHITE DMX HANGING HARDWARE: For grid ceiling applications the dual GridBox™ mounting is supplied (standard). For hard ceiling applications the ceiling mounting box is supplied (standard). DMX feeds cannot be cut or spliced. DMX feeds should be ordered based on fixed lengths. Available DMX pendant feed lengths are 5' (standard), 12', and 30'.

¹ Not available with Wall Wash

² White Cross Blade (WCB) baffles not available with custom angles. Available in 90 degrees only

³ Regressed only

⁴ Not available with Regressed or Curves

Submitted by:		Date:
Type:	Project:	
Ordering Info:		

High Performance 2" Aperture (HP-2) Surface Mount

SPECIFICATIONS

TUNABLE WHITE DMX INTERCONNECTION CABLES: Luminaires are prewired with plug-and-play interconnected cables to support easy plug-together joining of fixture runs. DMX to RJ45 adapters and an RJ45 terminator for every 32 DMX drivers are included.

OTHER FEATURES

ENDCAPS: Flat diecast aluminum endcaps (**FE**) add 1/4" to each end of luminaire. 1" Drop Down Lens Endcap (**DE**) includes diffuse element to continue luminance of drop lens. Open Endcap (**OE**) is for use with the Hollowed Ellipse Louver (**LHE**)⁵; following the curve of the louver.

EMERGENCY STYLE: Optional emergency to generator/inverter wiring, internal generator transfer switch, nightlight wiring, step-dimming driver, backup battery.

Backup Battery

	Legrand 18W	Legrand 10W/ Bodine BSL310LP
HP2-SM-D		
Min. Housing Length	8"	6"
EM Lumen Output	1608	956
EM Section Illuminated	2'	2' or 4'
HP2-SM-WW-D		
Min. Housing Length	8"	4"
EM Lumen Output	1500	891
EM Section Illuminated	4'	4'

⁵ Minimum fixture housing length for battery pack approved without sensor.
The lumens are based on 835. For other CCT/CRI, refer to the Lumen Adjustment Factor table on page 8

Bodine GTD and Legrand ALCR Min. Length

Configuration	Min Length
Generator	6'
Generator + OCC	8'
Daylight	6'
Generator + Daylight	8'

Tunable White ELECTRICAL OPTIONS⁶:

TW Driver Options

- **0-10V:** EM/GEN, GTD or Battery Back Up
- **DMX:** Battery Back Up
- **DALI:** EM/GEN, GTD or Battery Back Up
- **LUTRON:** EM/GEN, GTD or Battery Back Up

⁵ Regressed only

⁶ Consult Finelite for Generator Transfer Device and Battery Back up fit

⁷ 20 business days lead time for color

⁸ Excludes Battery Back up and Generator Transfer Device weight

INTEGRATED SENSORS: Integrated PIR (Passive Infrared) Occupancy (**OBO**) or Daylight Sensors (**OBD**) available with Flush and Bottom Glow downlight diffusers. PIR sensors not recommended for stairwell applications. Refer to Occupancy Sensor & Daylight Sensor tech sheet and the Embedded Intelligence landing page for more information and additional sensor options. Minimum fixture length: Direct and Indirect with a sensor is 3ft. The default location for the Connected Lighting Module (**CLM**) will be on the topside of the fixture for all mounting types except for Surface Mount (**SM**). In SM fixtures the CLM will be located on the direct side of fixture housed in a bracket that is flush with the direct lens.


FINISHES: Finelite Signal White (**SW**) powder coat, Finelite Black (RAL 9005) with semi gloss fine texture (**FB**), and Satin Aluminum (**SA**) are standard. Optional Adder: 179 RAL colors⁷ are available.

LABELS: Luminaire and electrical components are ETL-listed conforming to UL 1598 in the U.S.A. and CAN/CSA C22.2 No. 250.0 in Canada. In accordance with NEC Code 410.130 (G), this luminaire contains an internal driver disconnect. UL 924 and UL 2108 - PoE options available on request. These fixtures are rated for Damp Location. HP-2 can be used to comply with 2016 Title 24, Part 6 (JA8); high efficacy LED light source requirements. Finelite products use electronic components that are RoHS compliant, and the mechanical components of the luminaire have been verified to not knowingly contain any restricted substances listed per RoHS Directive 2015/863. Consult factory for tailored lighting options. Finelite makes the specification process easy when putting healthier products on your projects. Simply add – **RLA** (Red List Approved) or – **RLD** (Red List Declared) to your part number.


WEIGHT⁸: SM - 2.3 lb/ft; WW - 2.9 lb/ft

WARRANTY: 10-year performance-based warranty on all standard components. Optional accessories such as emergency battery packs are covered by their individual manufacturer warranties.


SURFACE MOUNT OPTIONS

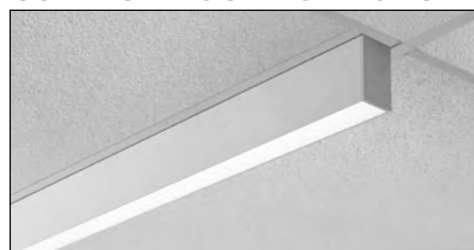

Ceiling Surface Mount

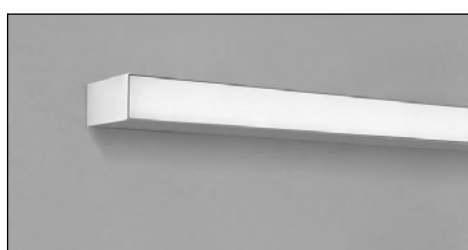

Horizontal Surface Mount

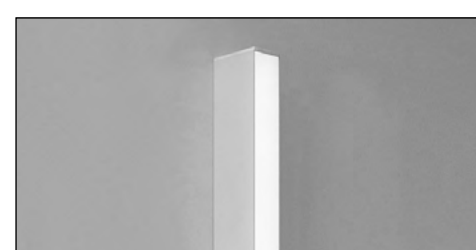


Vertical Surface Mount


Submitted by:		Date:
Type:	Project:	
Ordering Info:		

High Performance 2" Aperture (HP-2) Surface Mount


AESTHETIC OPTIONS




Flush Diffuser (**F**)



Bottom Glow Diffuser (**BG**)



1" Drop Down Lens (**DL**)




Flat Diffuser with 1" Regressed (**RG-D**)



Downlight Asymmetric Optic (**DAO**) ¹
Externally flush




Downlight Spread Optic (**DSO**) ¹
Externally flush



White Cross Blade Baffle ² (**RG-WCB**)



Hex Louver ² (**RG-LHC**)



Hollowed Ellipse Louver ² (**RG-LHE**)



Kicker (**K**) - Wall Wash only

¹ With a subtle ribbed appearance providing specialized distribution
² Regressed only. Not available with Wall Wash


Submitted by:		Date:
Type:	Project:	
Ordering Info:		

High Performance 2" Aperture (HP-2) Surface Mount


DOWNLIGHT ASYMMETRIC OPTIONS

The diagrams below show a linear run from power feed to ender. Specifying DAO-L distributes light to the left or DAO-R distributes light to the right. For proper orientation: view luminaire from starter end when specifying the direction of the Downlight Asymmetric optic.

Downlight Asymmetric Optic Left (DAO-L)

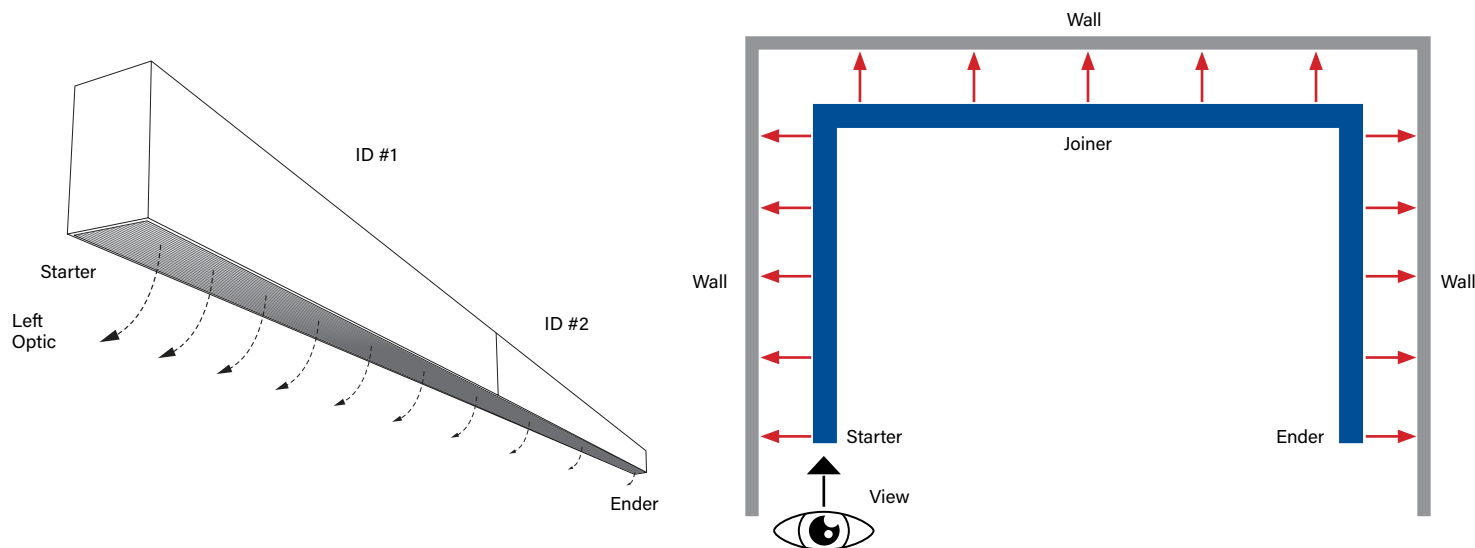

Downlight Asymmetric Optic Right (DAO-R)

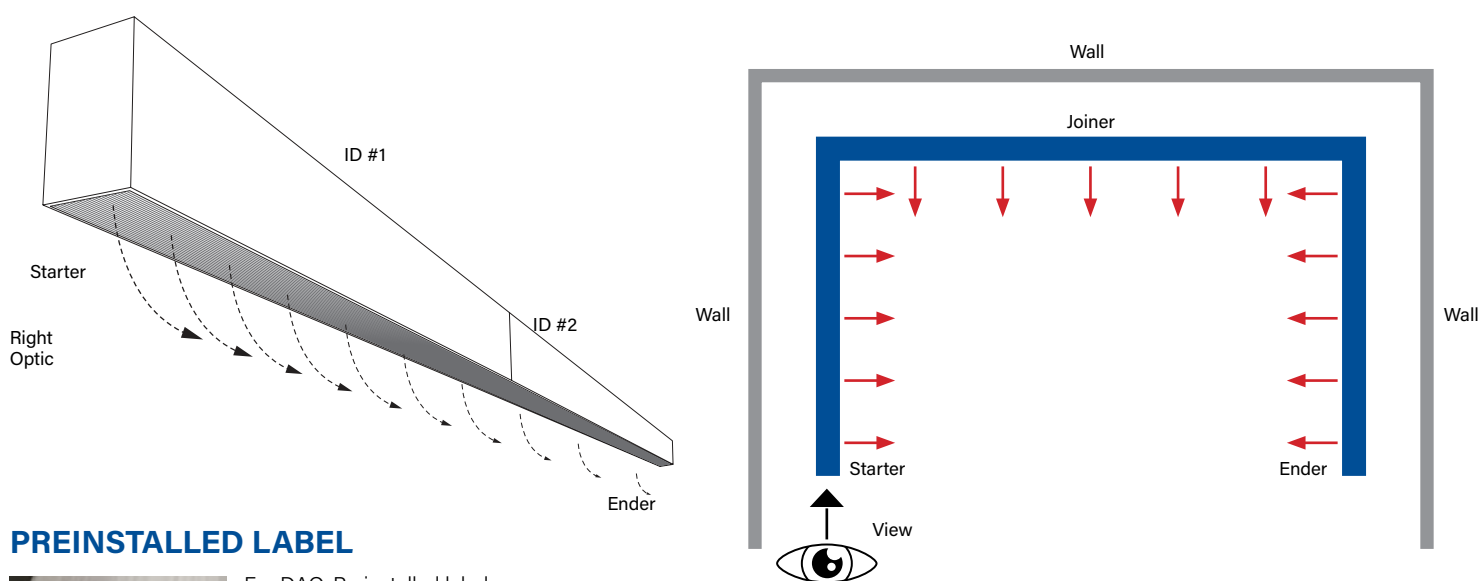

PREINSTALLED LABEL



For DAO, Preinstalled label on diffuser shows direction of light. Remove after installation.

Submitted by:		Date:
Type:	Project:	
Ordering Info:		

High Performance 2" Aperture (HP-2) Surface Mount

Recessed Photometry - 4' Luminaire 3500K

HP2-SM-D-4'-V-835-DAO

Downlight: Downlight Asymmetric Optic - Right


Efficacy: 105 lm/W

Total luminaire output: 3741 lumens (935 lm/ft)
35.5 watts (8.9 W/ft)

Peak Candela Value: 1670 @ 0°

CRI: 80 / CCT: 3500K

ITL LM79 Report REP-051921-01



HP2-SM-D-4'-V-835-DSO

Downlight: Downlight Spread Optic


Efficacy: 92 lm/W

Total luminaire output: 3273 lumens (818 lm/ft)
35.7 watts (8.9 W/ft)

Peak Candela Value: 1197 @ 0°

CRI: 80 / CCT: 3500K

ITL LM79 Report 94139



Total Light Output, 3500K, 80 CRI (Lumens) - 4' Luminaire

S ¹	B ¹	H ¹	V ²
1531	1925	2910	3741

Light Output, 3500K, 80 CRI (Lumens Per Foot)

S ¹	B ¹	H ¹	V ²
383	481	727	935

Power, 3500K (Watts Per Foot)

S ¹	B ¹	H ¹	V ²
3.5	4.4	6.8	8.9

Efficacy, 3500K, 80 CRI (Lumens Per Watt)

S ¹	B ¹	H ¹	V ²
110	109	107	105

S - Standard Output, B - Boosted Standard Output, H - High Output, V - Very High Output

¹ Family Correlation based on 4' luminaire 3500K Very High Output (V) test - 120V.

² Based on ITL report: REP-051921-01

Total Light Output, 3500K, 80 CRI (Lumens) - 4' Luminaire

S ¹	B ¹	H ¹	V ²
1340	1684	2546	3273

Light Output, 3500K, 80 CRI (Lumens Per Foot)

S ¹	B ¹	H ¹	V ²
335	421	636	818

Power, 3500K (Watts Per Foot)

S ¹	B ¹	H ¹	V ²
3.5	4.4	6.8	8.9

Efficacy, 3500K, 80 CRI (Lumens Per Watt)

S ¹	B ¹	H ¹	V ²
96	95	93	92

S - Standard Output, B - Boosted Standard Output, H - High Output, V - Very High Output

¹ Family Correlation based on 4' luminaire 3500K Very High Output (V) test - 120V.

² Based on ITL report: 94139

Wattage is Real Power. If you would like additional details to calculate Apparent Power, please contact your local Finelite representative.

Sample Lumen Adjustment Calculation

Lumen Adjustment Factors 80 CRI	
3000K	0.985
3500K	1.000
4000K	1.032

Lumen Adjustment Factors 90 CRI	
3000K	0.746
3500K	0.760
4000K	0.789

High Output (H) / 4000K, 90 CRI

Lumen Adjustment Factor: 0.789

Total Light Output: 2910 lm x 0.789 = 2296 lm

Total Light Output per Foot: 707 lm/ft x 0.789 = 574 lm/ft.
watts/foot: 6.8 W/ft.

$$\text{Efficacy} = \frac{574 \frac{\text{lm}}{\text{ft.}}}{6.8 \frac{\text{W}}{\text{ft.}}} = 84 \text{ lm/W}$$


Submitted by:		Date:
Type:	Project:	
Ordering Info:		

High Performance 2" Aperture (HP-2) Surface Mount

Recessed Photometry - 4' Luminaire 3500K


HP2-SM-D-4'-V-835
Downlight: Flush Diffuser

Efficacy: 89 lm/W
Total luminaire output: 3287 lumens (822 lm/ft)
36.9 watts (9.2 W/ft)
Peak Candela Value: 1335 @ 0°
CRI: 80 / CCT: 3500K
ITL LM79 Report 85135



HP2-SM RG-D-4'-V-835
Downlight: Regressed Diffuser

Efficacy: 79 lm/W
Total luminaire output: 2887 lumens (722 lm/ft)
36.7 watts (9.2 W/ft)
Peak Candela Value: 1529 @ 0°
CRI: 80 / CCT: 3500K
ITL LM79 Report 90350



Total Light Output, 3500K, 80 CRI (Lumens) - 4' Luminaire

S ¹	B ¹	H ¹	V ²
1346	1692	2557	3287

Light Output, 3500K, 80 CRI (Lumens Per Foot)

S ¹	B ¹	H ¹	V ²
336	423	639	822

Power, 3500K (Watts Per Foot)

S ¹	B ¹	H ¹	V ²
3.6	4.6	7.1	9.2

Efficacy, 3500K, 80 CRI (Lumens Per Watt)

S ¹	B ¹	H ¹	V ²
93	92	90	89

S - Standard Output, B - Boosted Standard Output, H - High Output, V - Very High Output

¹ Family Correlation based on 4' luminaire 3500K Very High Output (V) test - 120V.

² Based on ITL report: 85135

Total Light Output, 3500K, 80 CRI (Lumens) - 4' Luminaire

S ¹	B ¹	H ¹	V ²
1182	1486	2245	2887

Light Output, 3500K, 80 CRI (Lumens Per Foot)

S ¹	B ¹	H ¹	V ²
295	371	561	722

Power, 3500K (Watts Per Foot)

S ¹	B ¹	H ¹	V ²
3.6	4.6	7.0	9.2

Efficacy, 3500K, 80 CRI (Lumens Per Watt)

S ¹	B ¹	H ¹	V ²
82	81	80	79

S - Standard Output, B - Boosted Standard Output, H - High Output, V - Very High Output

¹ Family Correlation based on 4' luminaire 3500K Very High Output (V) test - 120V.

² Based on ITL report: 90350

Wattage is Real Power. If you would like additional details to calculate Apparent Power, please contact your local Finelite representative.

Sample Lumen Adjustment Calculation

Lumen Adjustment Factors 80 CRI	
3000K	0.985
3500K	1.000
4000K	1.032

Lumen Adjustment Factors 90 CRI	
3000K	0.746
3500K	0.760
4000K	0.789

High Output (H) / 4000K, 90 CRI
Lumen Adjustment Factor: 0.789
Total Light Output: 2557 lm x 0.789 = 2017 lm
Total Light Output per Foot: 639 lm/ft x 0.789 = 504 lm/ft.
watts/foot: 71 W/ft.

$$\text{Efficacy} = \frac{504 \frac{\text{lm}}{\text{ft.}}}{7.1 \frac{\text{W}}{\text{ft.}}} = 71 \text{ lm/W}$$

Submitted by:		Date:
Type:	Project:	
Ordering Info:		

High Performance 2" Aperture (HP-2) Surface Mount

Wall Wash Recessed - 4' Luminaire 3500K

HP2-SM-WW-D-K-4'-V-835

Downlight: With Kicker


Efficacy: 76 lm/W

Total luminaire output: 1500 lumens (375 lm/ft)
19.6 watts (4.9 W/ft)

Peak Candela Value: 882 @ 25°

CRI: 80 / CCT: 3500K

ITL LM79 Report 85137



Total Light Output, 3500K, 80 CRI (Lumens) - 4' Luminaire

S ¹	B ¹	H ¹	V ²
614	772	1167	1500

Light Output, 3500K, 80 CRI (Lumens Per Foot)

S ¹	B ¹	H ¹	V ²
154	193	292	375

Power, 3500K (Watts Per Foot)

S ¹	B ¹	H ¹	V ²
2.0	2.5	3.8	4.9

Efficacy, 3500K, 80 CRI (Lumens Per Watt)

S ¹	B ¹	H ¹	V ²
76	77	77	77

S - Standard Output, B - Boosted Standard Output, H - High Output, V - Very High Output

¹ Family Correlation based on 4' luminaire 3500K Very High Output (V) test - 120V.

² Based on ITL report: 85137

Wattage is Real Power. If you would like additional details to calculate Apparent Power, please contact your local Finelite representative.

Sample Lumen Adjustment Calculation

Lumen Adjustment Factors 80 CRI	
3000K	0.985
3500K	1.000
4000K	1.032

Lumen Adjustment Factors 90 CRI	
3000K	0.746
3500K	0.760
4000K	0.789

High Output (H) / 4000K, 90 CRI

Lumen Adjustment Factor: 0.789

Total Light Output: 1167 lm x 0.789 = 921 lm

Total Light Output per Foot: 292 lm/ft x 0.789 = 230 lm/ft.

watts/foot: 3.8 W/ft.

$$\text{Efficacy} = \frac{292 \frac{\text{lm}}{\text{ft.}}}{3.8 \frac{\text{W}}{\text{ft.}}} = 61 \text{ lm/W}$$

Submitted by:		Date:
Type:	Project:	
Ordering Info:		

High Performance 2" Aperture (HP-2) Surface Mount

WALL WASH RECESSED - SETBACK INFO AND APPLICATION DATA


HP2-SM-WW-D-K-4'-V-835

Downlight: With Kicker


Total luminaire output: 1500 lumens (375 lm/ft)

19.6 watts (4.9 W/ft)

CRI: 80 / CCT: 3500K

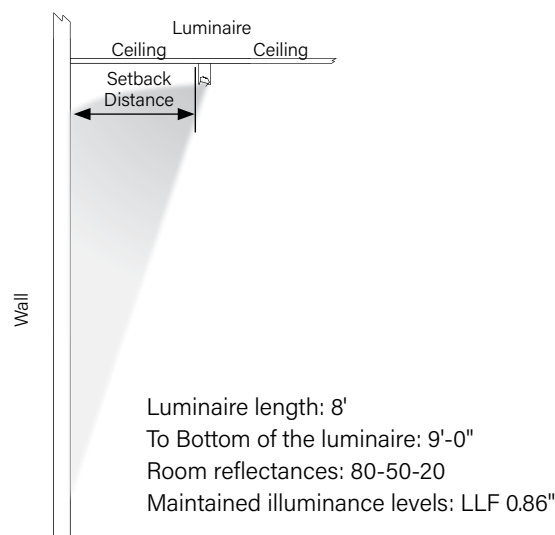

Setback Distance - 2'

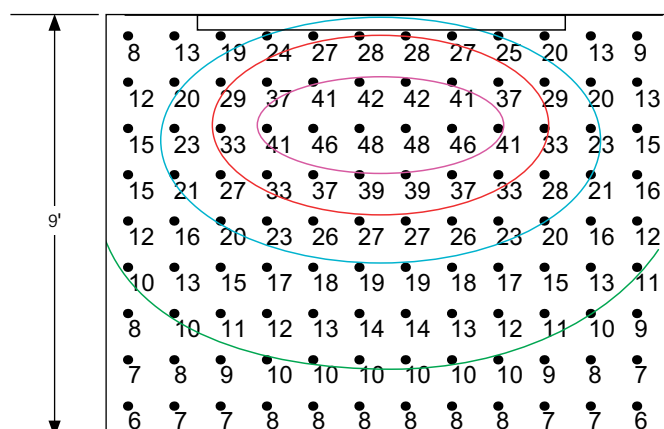

DOWNLIGHT ASYMMETRIC OPTIC - SETBACK INFO AND APPLICATION DATA


HP2-SM-D-4ft-V-835-DAO

Downlight: DAO


Total luminaire output: 3742 lumens (936 lm/ft)

35.6 watts (8.9 W/ft)

CRI: 80 / CCT: 3500K

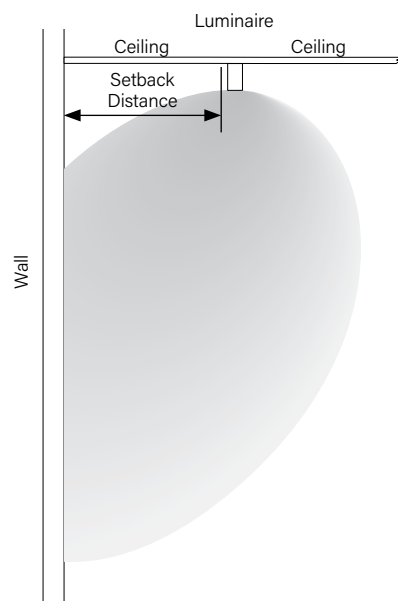

Setback Distance - 2'

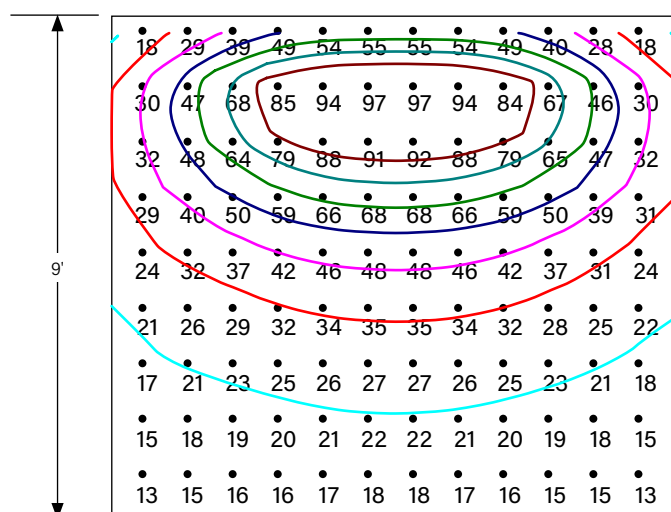

Submitted by:		Date:
Type:	Project:	
Ordering Info:		

0-10V Tunable White


Finelite's contractor friendly Tunable White luminaires are available at low cost, with powerful and simple 0-10V tuning and intensity controls.

TUNABLE WHITE FEATURES

- CCT range: 2700K - 6500K
- Dimming Range: 100% to 10%
- CRI Options: 80 CRI or 90 CRI

Note:
Dim to Off options available.

DUAL FEED DETAIL



WIRING LEGEND		
Black	Hot	Line Voltage
White	Neutral	Line Voltage
Green	Ground	

LUMINAIRE FAMILY MODIFICATIONS/RESTRICTIONS


Surface Mount Direct	Section Lengths											
	2'	3'	4'	5'	6'	7'	8'	9'	10'	11'	12'	
Output S,B,H,V Single Circuit	Rows can be comprised of 3'-12' sections. Tailored lengths available.											
Integral Battery Backup (BSL310LP)							✓		✓		✓	

PHOTOMETRY

Apply a power adjustment factor to calculate wattage usage

POWER	CONVERSION FACTOR
	1.1X

(Example: a 50 watt luminaire in static white would draw 55 watts using 0-10V Tunable White)



WIRING LEGEND		
Pink	Dimming	0-10V DC
Purple	Dimming	0-10V DC
Orange	TW	0-10V DC
Blue	TW	0-10V DC

