



HP-2 Recessed Wall Wash Mounting and Feed Guide

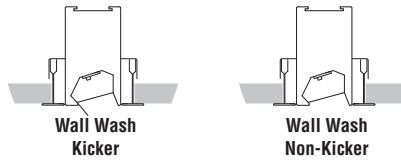


FINELITE®
Better Lighting

Customer: _____ Job: _____ PO: _____


WALL WASH RECESSED MOUNTING OPTIONS

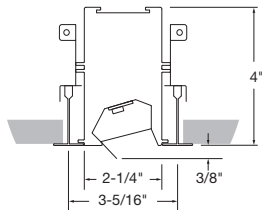


1" T-Bar (C1)

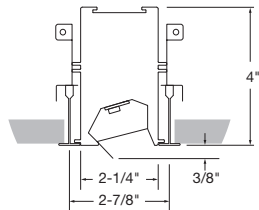


9/16" T-Bar (C2)

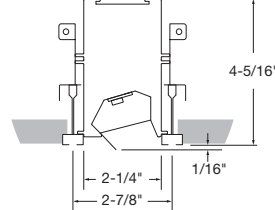


Standard Screw Slot (C3)




Flush Screw Slot (C3F)

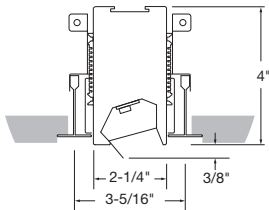


1" Tegular (C1T)

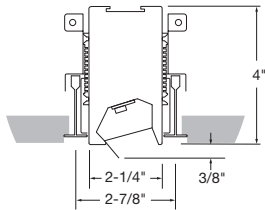


9/16" Tegular (C2T)

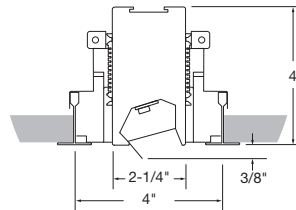


Tech Zone 4" (TZ4 C1)

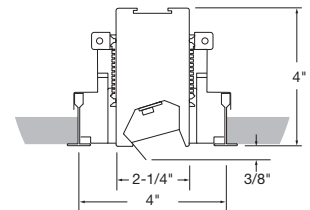


Tech Zone 4" (TZ4 C2)

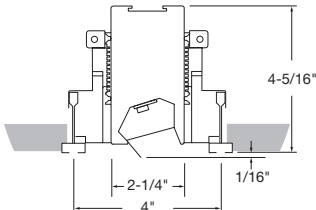


Tech Zone 4" (TZ4 C3)

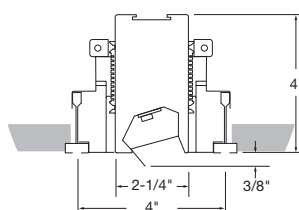



Tech Zone 4" (TZ4 C3F)

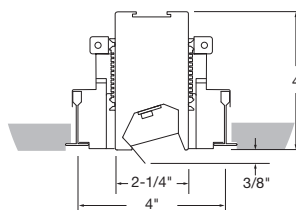


Tech Zone 4" (TZ4 C2T)

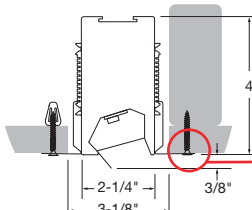

Spackle Flange (SF)

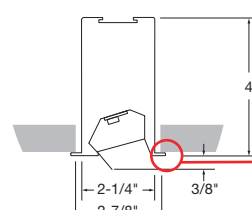

Visible Flange (VF)




Version 1



Ceiling Options
VF

Version 2



Ceiling Options
C1T, C2T, C3F, SF,
TZ6


Version 3




Ceiling Options
C1, C2, C3

* Note: +/- 1/16"


HP-2 Recessed Wall Wash Mounting and Feed Guide

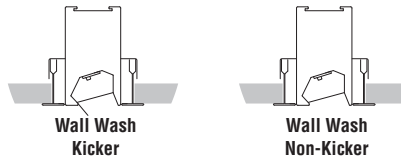


FINELITE®
Better Lighting

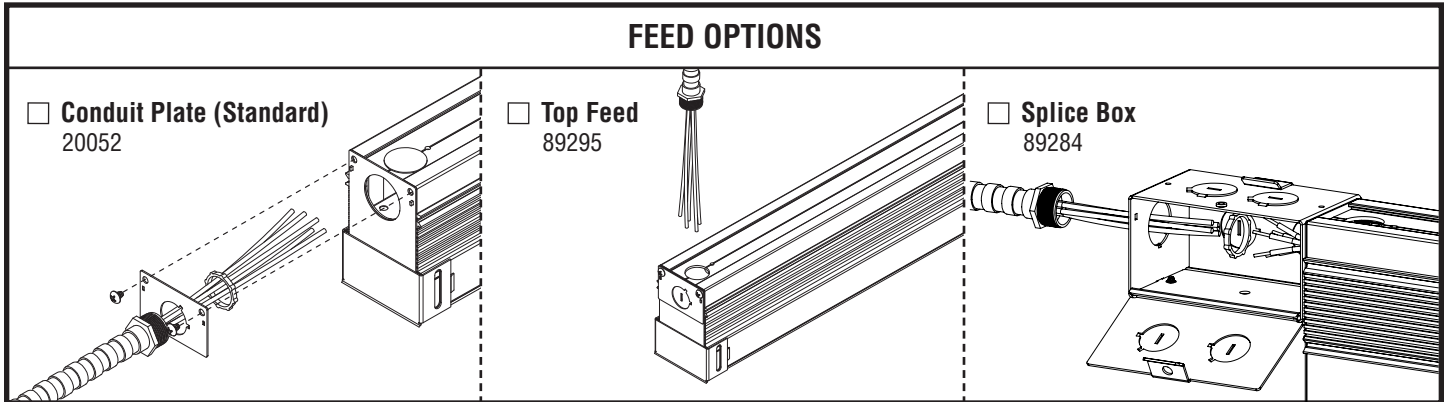


Recessed T-Bar Luminaire Lengths (C1, C2, C3, C3F, C1T, C2T, TZ6)

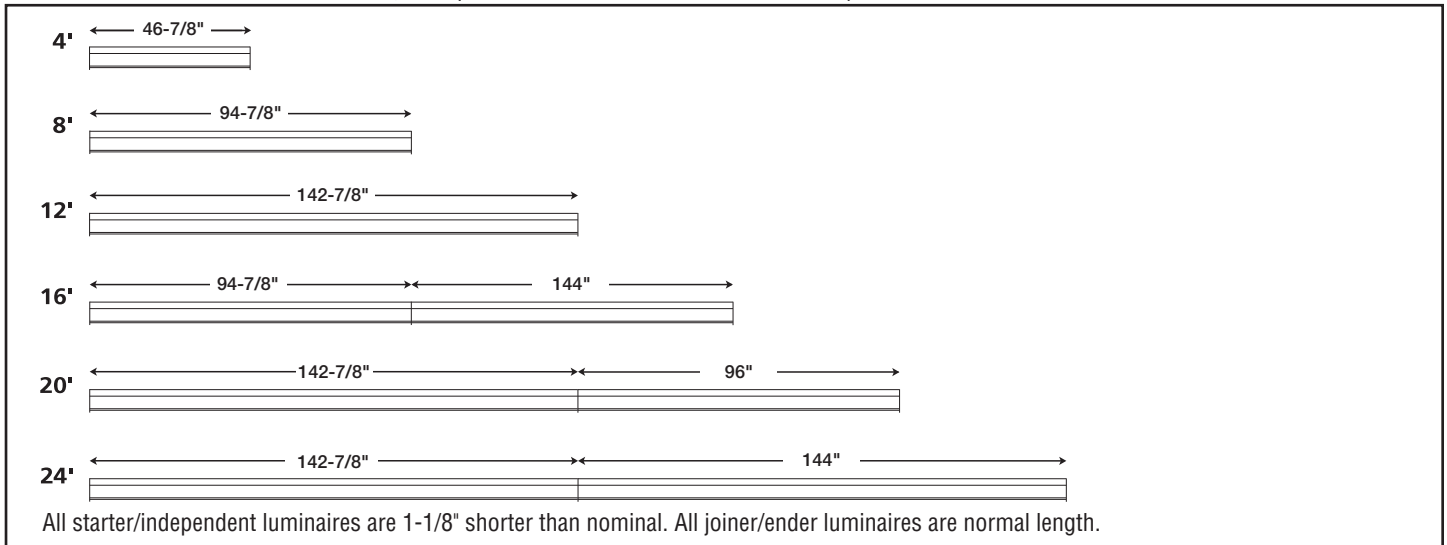

Recessed Non-T-Bar Support Locations (VF, SF)

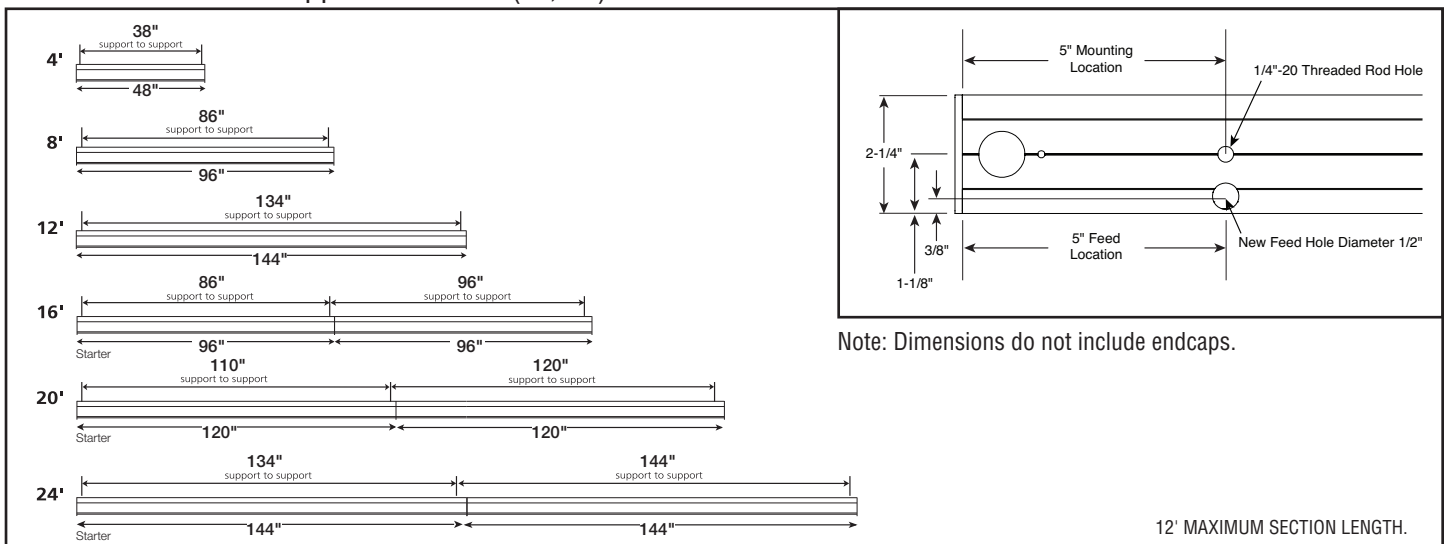

HP-2 Recessed Wall Wash Mounting and Feed Guide



FINELITE[®]
Better Lighting


SETBACK INFO AND APPLICATION DATA

Very High Output with Kicker
 Total luminaire output: 1500 Lumens (375 lumens/foot)
 19.6 Watts (4.9 watts/foot)
 CCT: 3500K




Luminaire length: 8'
 To Bottom of the luminaire: 9'-0"
 Room reflectances: 80-50-20
 Maintained illuminance levels – LLF 0.86"

Setback Distance - 2'

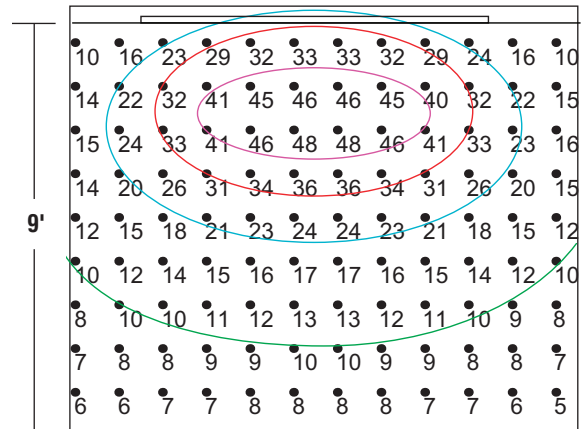

Setback Distance - 2' 6"

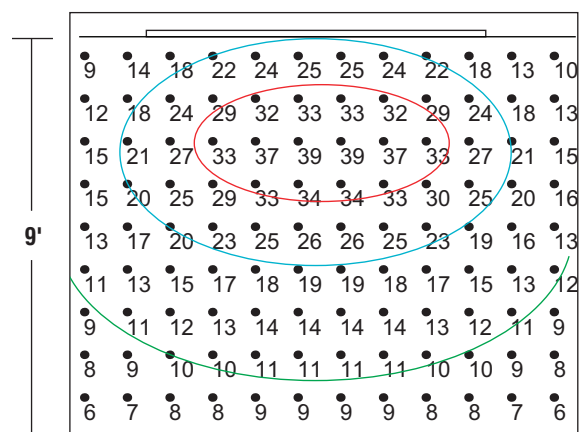

© 2018 FINELITE, INC. ALL RIGHTS RESERVED. CFG0072_V2_08/18