



High Performance Recessed (HPR-LED) EP Light Engine Replacement

Step 1

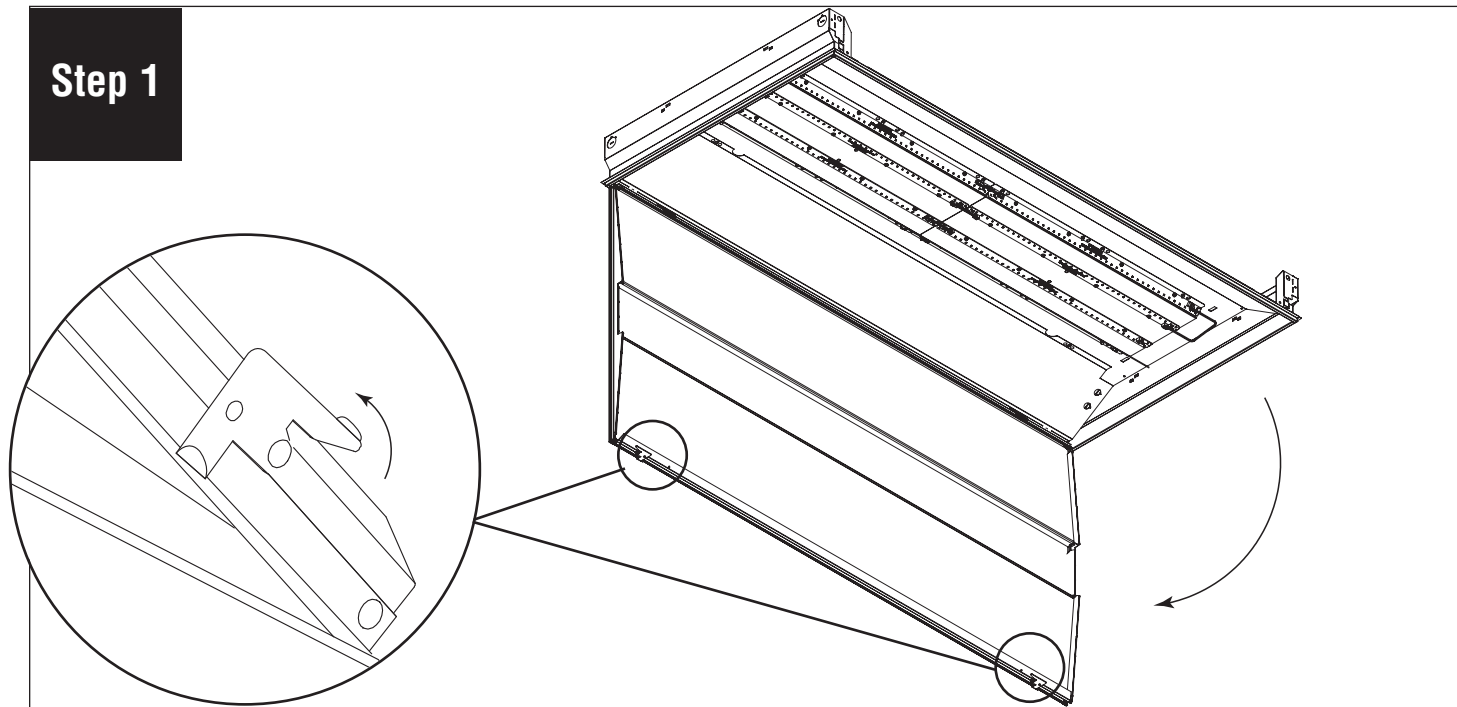


Disconnect power. Unlock the latches and rotate door to open.

Step 2

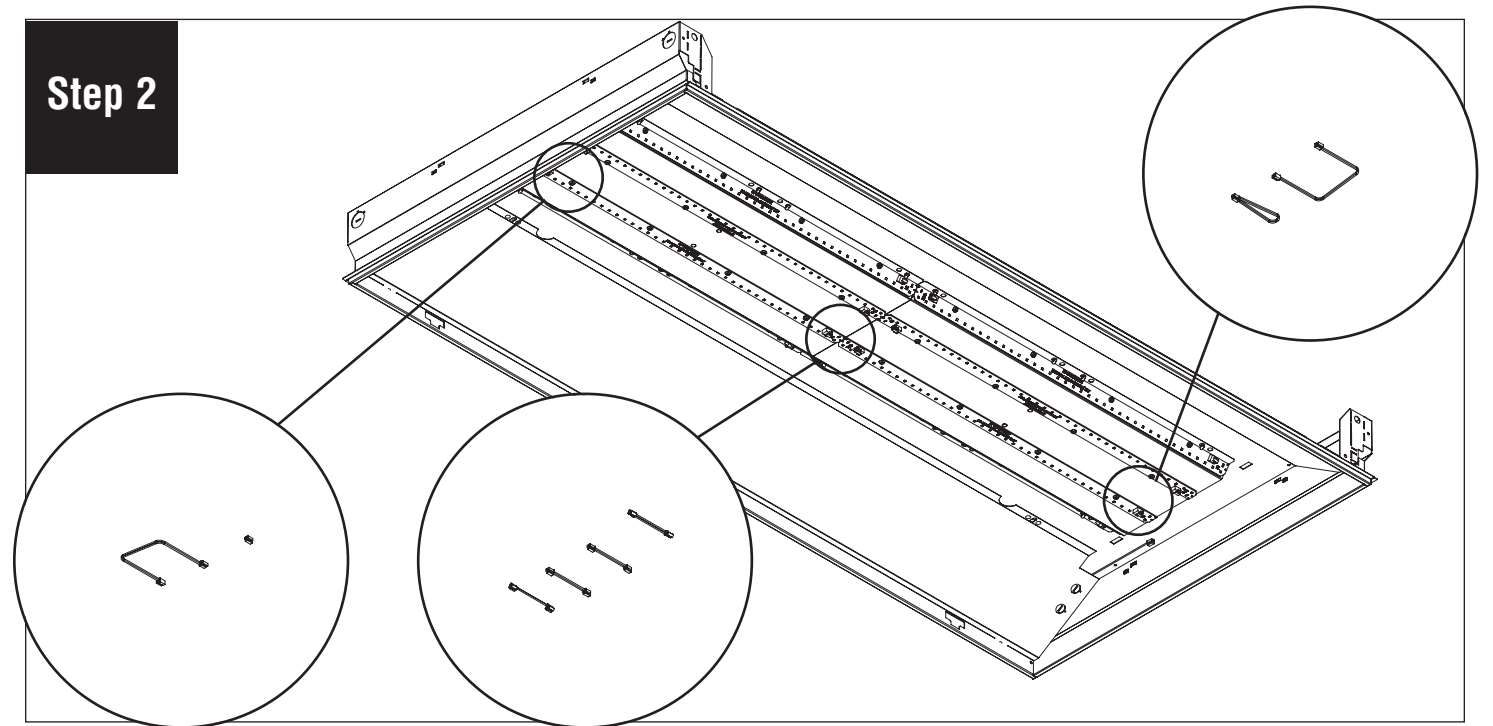


Disconnect and remove all jumpers.

Step 3

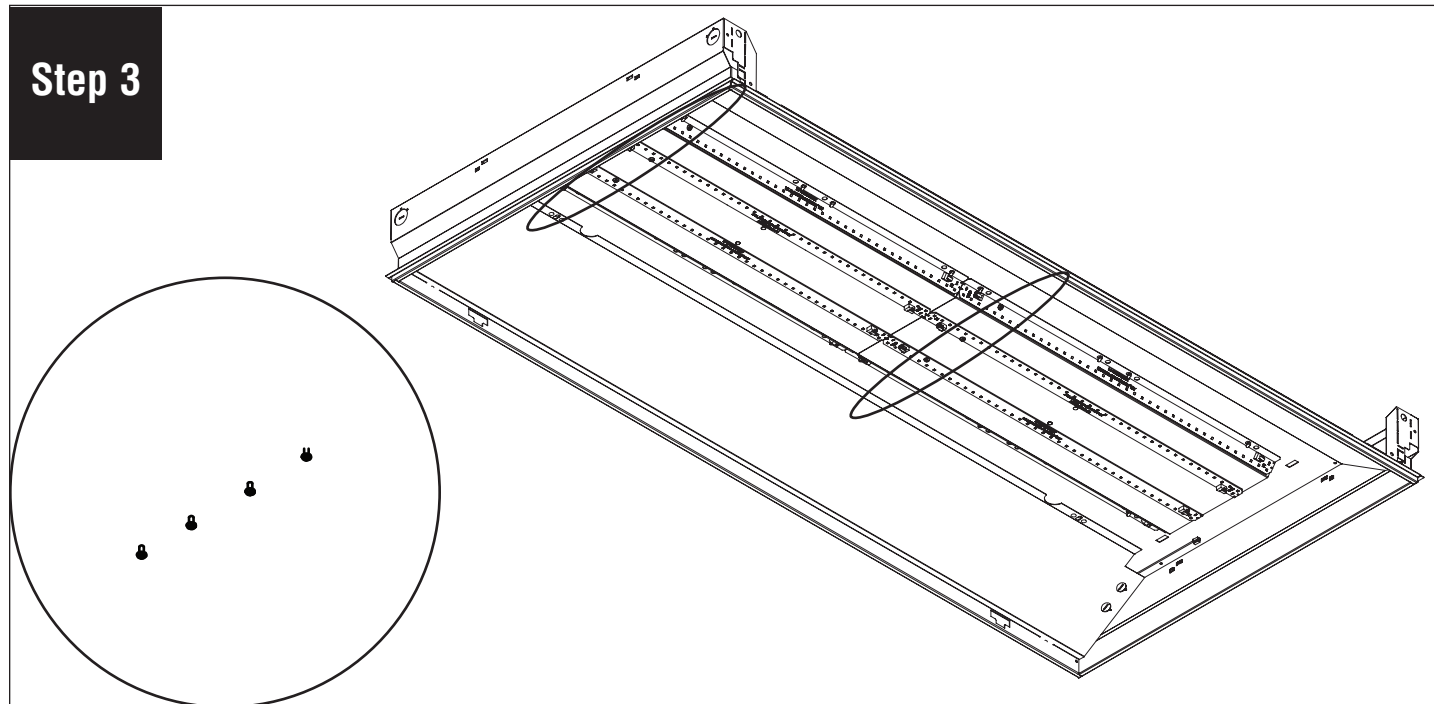

Remove all screws holding the LED boards.

Step 4

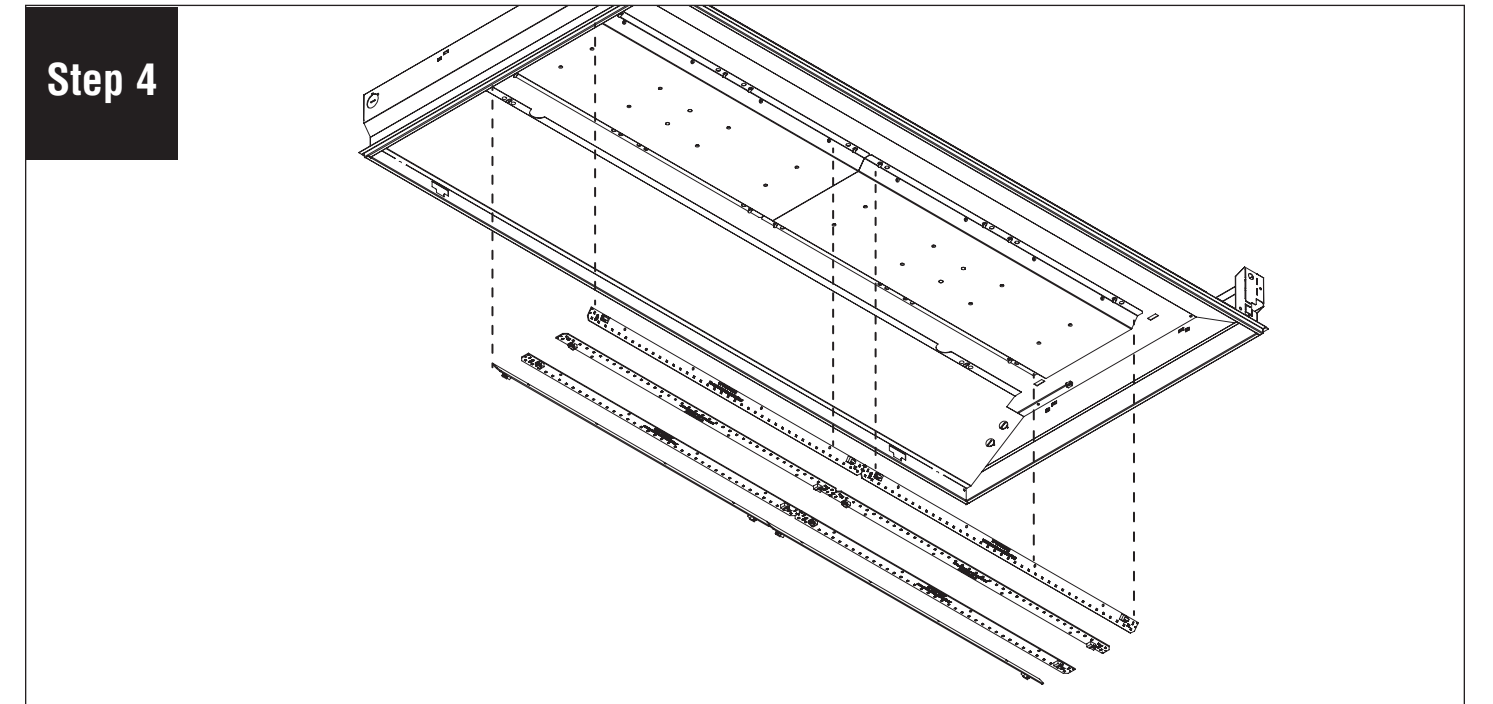

Remove old LED boards and replace with new boards. Secure new boards using #6-32 x 3/16 screws (provided). Reconnect all jumpers and close luminaire door. Turn power on to fixture.