

FINELITE

High Performance Recessed (HPR-LED) 1x1



HPR-LED Collection
2011 IES Progress
Report Selection




Date

Project

Type

Comments


Declare.

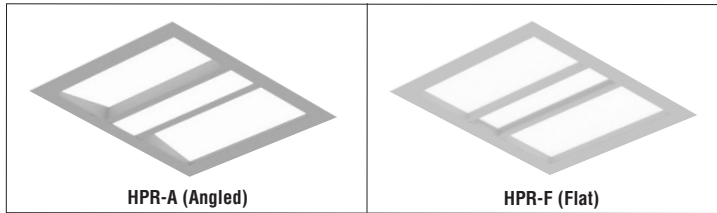

Refer to page 2 for all door styles

DESCRIPTION

HPR-LED is a highly efficient, recessed luminaire delivering excellent visual comfort and outstanding performance. Advanced optical design makes HPR-LED a powerful solution for low-ceiling applications and eliminates the shadows common to other LED recessed products. This Product is enrolled in the International Living Future Institute (ILFI) Declare 2.0 Program and is third-party verified with options achieving Red List Approved and Declared status.

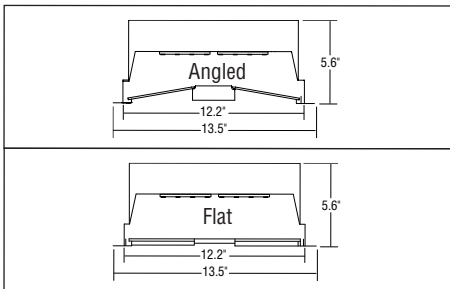

DIMENSIONS

GLARE-FREE ILLUMINATION:


A glare-free experience is attained with mid-powered LEDs properly distributed and paired with a precise diffuser to eliminate pixilation.

100% SERVICEABLE FROM BELOW

The replaceable light engine and driver are easy to access from below the ceiling.

ORDERING GUIDE

Sample Number: HPR LED - A - 1x1 - DCO - S - 835 - 277V - SC - C1 - RLA

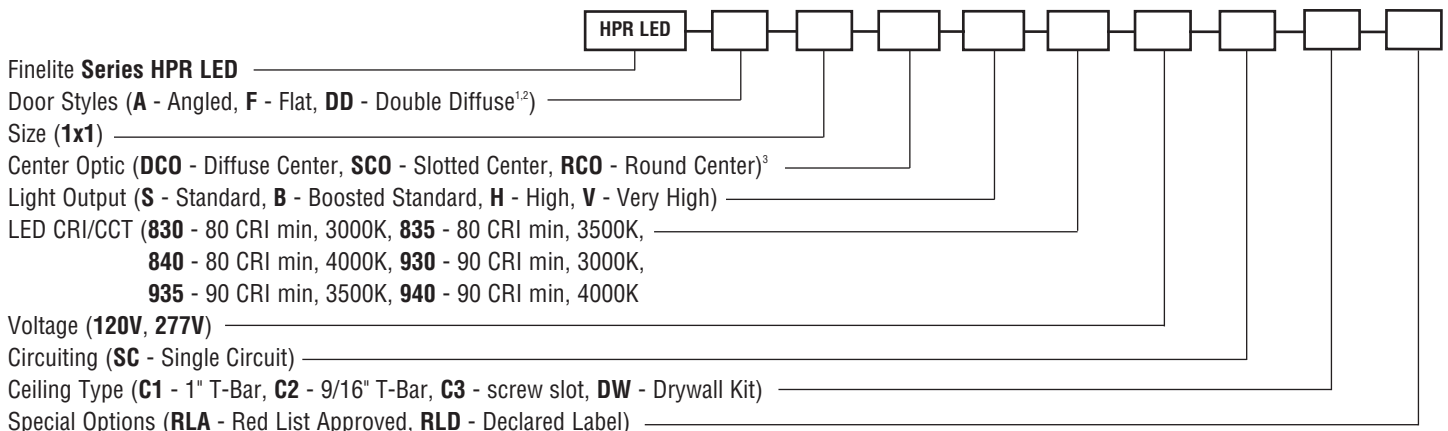

¹ Double Diffuse door not available with Center Optic options ³ Only available with Angled (A) and Flat (F) door options
² Not available with sensors


A brand of **legrand**

Finelite, Inc. • 30500 Whipple Road • Union City, CA 94587-1530 • (510) 441-1100 • Fax: (510) 441-1510 • www.finelite.com


Due to continuing product improvements, Finelite reserves the right to change specifications without notice. Please visit www.finelite.com for most current data.

© 2022 FINELITE, INC. ALL RIGHTS RESERVED. Form CTK0060_V6. EFFECTIVE DATE: 02/22


DOOR STYLES

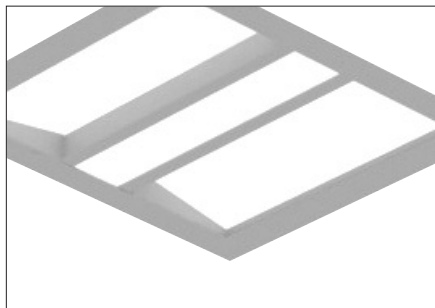

A - Angled

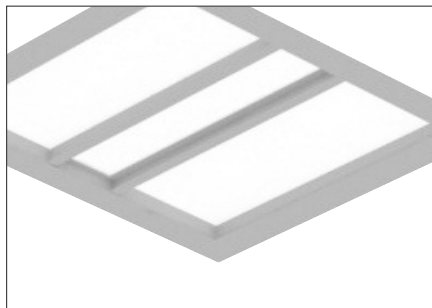

F - Flat

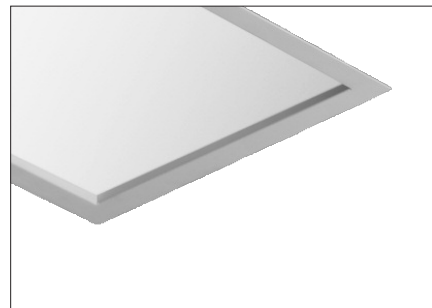

DD - Double Diffuse

CENTER OPTICS



DCO - Diffuse Center



SCO - Slotted Center



RCO - Round Center


DCO, SCO, and RCO are only available on Angled (A), and Flat (F) doors.

FINELITE

High Performance Recessed (HPR-LED) 1x1

PHOTOMETRY

HPR-LED-A-1x1-DCO-B
 Boosted Output - Angled Rail
 Efficacy: 97 lumens per watt
 Total luminaire output: 1914 Lumens
 19.7 Watts
 Peak Candela Value: 792 @ 0°
 CCT: 3500K
 ITL LM79 Report 85139



CANDLEPOWER SUMMARY						
	0.0	22.5	45	67.5	ACROSS	Flux
0	732	732	792	792	792	
5	787	787	788	787	788	75
10	771	772	773	773	774	
15	746	747	747	749	749	211
20	711	712	713	715	717	
25	669	669	670	672	674	309
30	619	620	620	622	624	
35	565	564	565	566	569	353
40	505	504	505	506	508	
45	444	444	444	444	444	342
50	384	381	382	380	380	
55	324	322	320	317	317	286
60	266	264	260	256	257	
65	210	208	203	200	200	202
70	157	156	150	147	147	
75	109	107	102	98	97	109
80	66	63	57	52	51	
85	28	25	20	20	19	27
90	0	0	0	0	0	

Angled (A) and Flat (F) Total Light Output, 3500K, 80 CRI (Lumens)			
S*	B**	H*	V*
1489	1914	2166	2821
Power, 3500K, 80 CRI (Watts)			
S*	B**	H*	V*
15.3	19.7	22.7	30.4
Efficacy, 3500K, 80 CRI (Lumens Per Watt)			
S*	B**	H*	V*
98	97	95	93

Lumen Adjustment Factors - 80 CRI	
3000K	0.985
3500K	1.000
4000K	1.032

Lumen Adjustment Factors - 90 CRI	
3000K	0.746
3500K	0.760
4000K	0.789

Apply a lumen adjustment factor to calculate lumens for the desired CCT and CRI.

SAMPLE LUMEN ADJUSTMENT CALCULATION

High Output (H) Angled (A) & Flat (F)
4000K, 90 CRI

Lumen Adjustment Factor = 0.789

Total Light Output =
2166 lm x 0.789 = 1709 lm

Efficacy = $\frac{1709 \text{ lm}}{22.7 \text{ W}} = 75 \text{ lm/W}$

* Family Correlation based on 3500K Boosted Standard Output (B) test - 120V.

** Based on source ITL report 85139

S - Standard Output, B - Boosted Standard Output

H - High Output, V - Very High Output

A brand of Legrand

Finelite, Inc. • 30500 Whipple Road • Union City, CA 94587-1530 • (510) 441-1100 • Fax: (510) 441-1510 • www.finelite.com

Due to continuing product improvements, Finelite reserves the right to change specifications without notice. Please visit www.finelite.com for most current data.

SPECIFICATIONS

CONSTRUCTION: Die-formed 20-gauge cold-rolled steel housing. All components are hard-tooled to tolerances of +/- 0.010". UV stabilized weather-strip pile gasket with polypropylene backing. Hinged door frame assembly provides easy access to light arrays and driver compartment for servicing from below. Seismic brackets are integrated into the luminaire assembly. Additional wire entrances are positioned on the ends of the housing to allow easy wiring access for the installer.

REFLECTORS: Die-formed 20-gauge cold-rolled steel reflectors are finished in 96LG high reflectance matte white powder coat paint.

OPTICAL SYSTEM: Components include diffuser panels and a central optic element held in place with a frame constructed from die-formed cold-rolled steel. The diffusers are UV-stabilized and impact-resistant frosted virgin acrylic, 0.120" thick. They are either angled toward the central optic or parallel to the ceiling plane.

DOUBLE DIFFUSE: Visible diffuser: UV-stabilized and impact-resistant frosted virgin acrylic, 0.120" thick. Inner diffuser: 0.120" thick with 60% round perforations white/white.

CENTER OPTIC OPTIONS: Only available with Angled (A) and Flat (F) door styles.

Diffuse Center Optic (DCO): UV-stabilized and impact resistant frosted virgin acrylic.

Slotted Center Optic (SCO): Die-formed cold-rolled steel panel with a 1/16" x 1/2" rectangular hole pattern. Virgin acrylic overlay.

Round Center Optic (RCO): Die-formed cold-rolled steel panel with precision-punched 3/32" round hole pattern arranged in staggered formation. Virgin acrylic overlay.

LIGHT OUTPUT: Four lumen packages available, Standard (S), Boosted Standard (B), High (H), and Very High (V). A separate chart summarizes lumen distribution and wattage. Light engines are replaceable.

LUMEN MAINTENANCE: 90% of initial light output (L90) at 100,000+ hours; 70% of initial light output (L70) at 200,000+ hours.

DRIVER: Replaceable 120V/277V Constant Current Reduction dimming driver standard. Can be wired dimming or non-dimming. 0-10V dimming controls with a range of 10% - 100%. Dimming to 1% available; consult factory. Driver is fully accessible from below the ceiling. Power Factor: 0.9. Total Harmonic Distortion (THD): <20%.

LUTRON DRIVER OPTIONS: LUTES1 (Hi-lume 1% EcoSystem with Soft-On, Fade to Black dimming (LDE1 series)); LUT2W (Hi-lume 1% 2-wire, 120V forward phase dimming (LTEA series)); Contact factory for availability of discontinued Lutron drivers, L3DA-3-wire and L3DA EcoSystem.

ELECTRICAL: Optional emergency to generator/inverter wiring, internal generator transfer switch, nightlight wiring, step-dimming driver. Chicago Plenum option. Bodine BSL722 battery backup also available.

MOUNTING: Standard flange design works with most lay-in ceiling types. Integral pry-out tabs secure the luminaire to the ceiling grid from above. Tie-in locations for tie-wire on all corners. Consult local code for appropriate tie-wire recommendations. Drywall Kit available.

FINISH: Housing and door assembly painted with 96 LG high reflectance matte white powder coat paint. Optional adder: Anti-microbial paint. Contact factory.

FEED: Optional whips (with flex connectors) supplied in a maximum of 11' lengths. Lead Wires.

LABELS: Luminaire and electrical components are ETL-listed conforming to UL 916, 1598, 8750, 924 in the U.S.A. and CAN/CSA C22.2 No. 205, 250, and 141 in Canada. In accordance with NEC Code 410.73 (G), this luminaire contains an internal driver disconnect. Damp Location. IC-rated. Finelite products use electronic components that are RoHS compliant, and the mechanical components of the luminaire have been verified to not knowingly contain any restricted substances listed per RoHS Directive 2011/65/EU. Simply add - RLF (Red List Free) or - RLD (Declared) to your part number.

WEIGHT: 10 lbs maximum.

WARRANTY: 10-year performance-based warranty on all standard components. Optional accessories such as emergency battery packs are covered by their individual manufacturer warranties.