

# FINELITE

## Tunable White High Performance Recessed (HPR LED) 1x2



Declare.

Third Party Verified

Date

Project

Type

Comments



Refer to page 3 for all door styles

### DESCRIPTION

HPR LED is a highly efficient, recessed luminaire delivering excellent visual comfort and outstanding performance. Advanced optical design makes HPR LED a powerful solution for low-ceiling applications and eliminates the shadows common to other LED recessed products.

This Product is enrolled in the International Living Future Institute (ILFI) Declare 2.0 Program and is third-party verified with options achieving Red List Approved and Declared status.

### ORDERING GUIDE

Sample Number: HPR LED - A - 1x2 - DCO - B - 8TW - 277V - SC - C1 - RLA

Finelite <b>Series HPR LED</b>	<input type="text" value="HPR LED"/>
Door Styles ( <b>A</b> - Angled, <b>ANR</b> - Angled Narrow Rail, <b>F</b> - Flat, <b>DD</b> - Double Diffuse <sup>1</sup> )	<input type="text"/>
Size / Pre-qualified Controls by others ( <b>1X2</b> )	<input type="text"/>
Center Optic ( <b>DCO</b> - Diffuse Center, <b>SCO</b> - Slotted Center, <b>RCO</b> - Round Center) <sup>2</sup>	<input type="text"/>
Light Output ( <b>B</b> - Boosted Standard)	<input type="text"/>
LED CRI/CCT ( <b>8TW</b> - 80 CRI min, Tunable White; <b>9TW</b> - 90 CRI min, Tunable White. See below for Tunable White controls options)	<input type="text"/>
Voltage ( <b>120V, 277V</b> )	<input type="text"/>
Circuiting ( <b>SC</b> - Single Circuit)	<input type="text"/>
Ceiling Type ( <b>C1</b> - 1" T-Bar, <b>C2</b> - 9/16" T-Bar, <b>C3</b> - screw slot, <b>DW</b> - Drywall Kit) <sup>3</sup>	<input type="text"/>
Special Options ( <b>RLA</b> - Red List Approved, <b>RLD</b> - Declared Label)	<input type="text"/>

<sup>1</sup> Double Diffuse door not available with Center Optic options

<sup>2</sup> Only available on Angled (A), Angled Narrow Rail (ANR), and Flat (F) door options

<sup>3</sup> Surface Mount available

### TUNABLE WHITE CONTROLS OPTIONS: SELECT ONE



☐ FineTune controller with FineTune DMX Driver

OR

- ☐ Controls by others with pre-qualified DMX driver
- ☐ Controls by others with pre-qualified DALI driver
- ☐ Controls by others with pre-qualified PoE setup
- ☐ Controls by Lutron with pre-qualified Lutron driver

A brand of **legrand**



Finelite, Inc. • 30500 Whipple Road • Union City, CA 94587-1530 • (510) 441-1100 • Fax: (510) 441-1510 • [www.finelite.com](http://www.finelite.com)

Due to continuing product improvements, Finelite reserves the right to change specifications without notice. Please visit [www.finelite.com](http://www.finelite.com) for most current data.

# FINELITE

## Tunable White High Performance Recessed (HPR LED) 1x2

### LUMINAIRE FEATURES

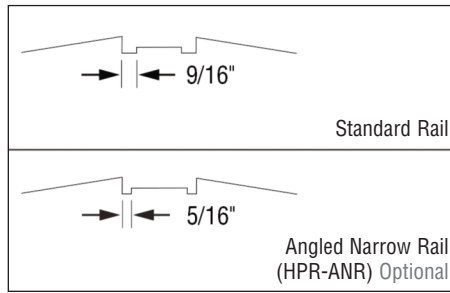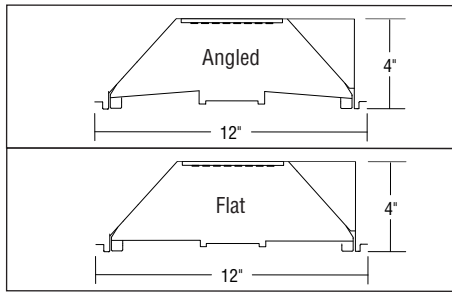

### DIMENSIONS


#### ANGLED NARROW RAIL OPTION

Available in angled door style with the same center optic choices. The optional narrow rails are approximately 5/16" wide. The standard center rails are approximately 9/16" wide.

#### 100% SERVICEABLE FROM BELOW


The replaceable light engine and driver are easy to access from below the ceiling.

### TUNABLE WHITE FEATURES

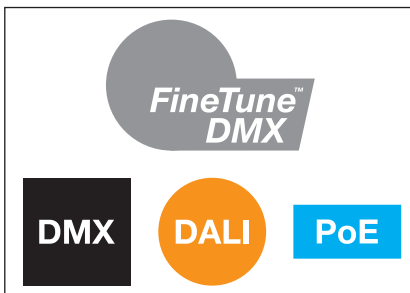

#### MULTIPLE CONTROL ARCHITECTURES

Finelite's FineTune™ DMX, qualified DMX, DALI (open and proprietary), or PoE (Power over Ethernet).

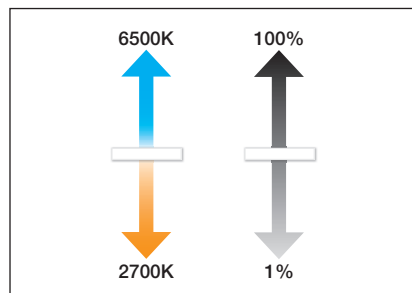

#### TUNABLE WHITE


Any CCT between 2700K and 6500K with excellent CRI and R9 values; dimming from 100% to 1%.



#### FINETUNE SYSTEM

Award-winning control system, which includes intuitive wall mounted controller, power control center, driver, and mobile app to easily tailor lighting to match user preference.


### DMX CONNECTION

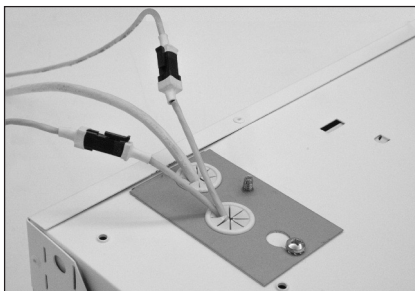


# FINELITE

## Tunable White High Performance Recessed (HPR LED) 1x2

### DOOR STYLES

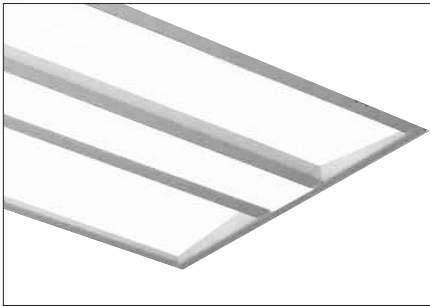

**A - Angled**  
**ANR - Angled Narrow Rail**

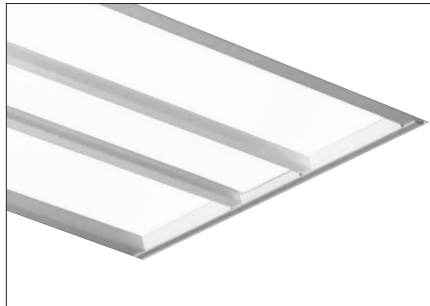

**F - Flat**




**DD - Double Diffuse**


### CENTER OPTICS



**DCO - Diffuse Center**

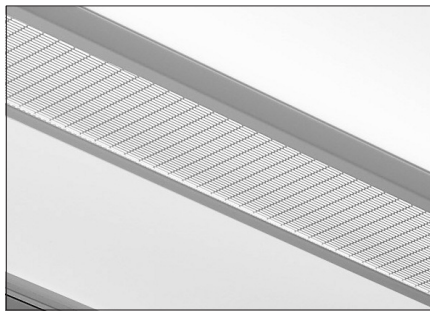

**SCO - Slotted Center**

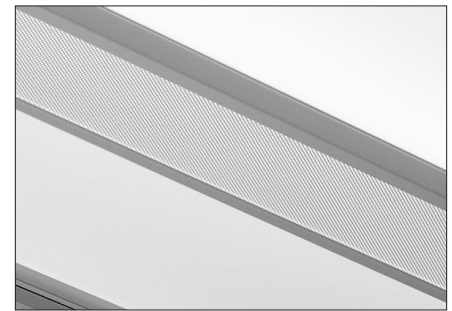

**RCO - Round Center**


DCO, SCO, and RCO are only available on Angled (A), Angled Narrow Rail (ANR), and Flat (F) doors.

# FINELITE

## Tunable White High Performance Recessed (HPR LED) 1x2

### PHOTOMETRY

HPR LED-F-1x2-DC0-B  
 Boosted Standard Output - Flat  
 Total luminaire output: 1943 Lumens  
 Peak Candela Value: 793 @ 0°  
 CCT: 3500K  
 ITL LM79 Report 85140



CANDELA DISTRIBUTION					
	0.0	22.5	45.0	67.5	ACROSS
0	793	793	793	793	793
5	789	789	789	789	790
10	776	777	777	778	780
15	755	755	757	758	760
20	723	725	726	729	730
25	684	685	687	688	688
30	636	637	638	638	637
35	582	583	583	580	580
40	524	524	521	516	513
45	463	462	456	449	445
50	399	397	391	382	377
55	337	335	327	316	310
60	278	274	264	252	246
65	220	215	205	193	188
70	163	160	149	139	135
75	113	109	99	90	86
80	67	64	55	47	45
85	29	25	18	17	17
90	0	0	0	0	0

Angled (A) and Flat (F) Total Light Output, 3500K, 80 CRI (Lumens)	
<b>B*</b>	
1943	
Power, 3500K, 80 CRI (Watts)	
<b>B*</b>	
21.7	
Efficacy, 3500K, 80 CRI (Lumens Per Watt)	
<b>B*</b>	
90	

#### B - Boosted Standard Output

\* Based on ITL report: 85140 3500K, 80 CRI Boosted Standard Output (B) test - 120V.

Lumen Adjustment Factors - 80 CRI	
<b>2700K</b>	0.968
<b>3000K</b>	0.985
<b>3500K</b>	1.000
<b>4000K</b>	1.032
<b>6500K</b>	1.032

Lumen Adjustment Factors - 90 CRI	
<b>2700K</b>	0.731
<b>3000K</b>	0.746
<b>3500K</b>	0.760
<b>4000K</b>	0.789
<b>6500K</b>	0.789

Apply a lumen adjustment factor to calculate lumens for the desired CCT and CRI.

### SAMPLE LUMEN ADJUSTMENT CALCULATION

Boosted Standard Output (B)  
Angled (A) & Flat (F)  
4000K, 90 CRI

Lumen Adjustment Factor = 0.789

Total Light Output =  
 1943 lm x 0.789 = 1533 lm

Efficacy =  $\frac{1533 \text{ lm}}{21.7 \text{ W}} = 71 \text{ lm/W}$

A brand of **legrand**

Finelite, Inc. • 30500 Whipple Road • Union City, CA 94587-1530 • (510) 441-1100 • Fax: (510) 441-1510 • [www.finelite.com](http://www.finelite.com)

Due to continuing product improvements, Finelite reserves the right to change specifications without notice. Please visit [www.finelite.com](http://www.finelite.com) for most current data.

# FINELITE

## Tunable White High Performance Recessed (HPR LED) 1x2

### SPECIFICATIONS

**CONSTRUCTION:** Die-formed 20-gauge cold-rolled steel housing. All components are hard-tooled to tolerances of +/- 0.010". UV stabilized weather-strip pile gasket with polypropylene backing. Hinged door frame assembly provides easy access to light arrays and driver compartment for servicing from below. Seismic brackets are integrated into the luminaire assembly. Additional wire entrances are positioned on the ends of the housing to allow easy wiring access for the installer.

**REFLECTORS:** Die-formed 20-gauge cold-rolled steel reflectors are finished in 96LG high reflectance matte white powder coat paint.

**OPTICAL SYSTEM:** Components include diffuser panels and a central optic element held in place with a frame constructed from die-formed cold-rolled steel. The diffusers are UV-stabilized and impact-resistant frosted virgin acrylic, 1/8" thick. They are either angled toward the central optic or parallel to the ceiling plane. The standard center rails are approximately 9/16" wide. Optional narrow rail are approximately 5/16" wide.

**DOUBLE DIFFUSE:** Visible diffuser: UV-stabilized and impact-resistant frosted virgin acrylic, 0.120" thick. Inner diffuser: 1/8" thick with 60% round perforations white/white.

**CENTER OPTIC OPTIONS:** Only available with Angled (A), Angled Narrow Rail (ANR), and Flat (F) door styles.

*Diffuse Center Optic (DCO): UV-stabilized and impact resistant frosted virgin acrylic.*

*Slotted Center Optic (SCO): Die-formed cold-rolled steel panel with a 1/16" x 1/2" rectangular hole pattern. Virgin acrylic overlay.*

*Round Center Optic (RCO): Die-formed cold-rolled steel panel with precision-punched 3/32" round hole pattern arranged in staggered formation. Virgin acrylic overlay.*

**LIGHT OUTPUT:** Available in Boosted Standard (B). A separate chart summarizes lumen distribution and wattage. Light engines are replaceable.

**LUMEN MAINTENANCE:** 90% of initial light output (L90) at 100,000+ hours; 70% of initial light output (L70) at 200,000+ hours.

**TUNABLE WHITE DRIVER:** Replaceable LED driver accessible from below the ceiling. 120/277V. Power factor ≥0.90. Total Harmonic Distortion (THD): <20%. Dimming Range: 100% - 1%. Expected driver lifetime: 100,000 hours.

**LUTRON DRIVER OPTIONS:** LutDTW (1% T-Series 2-Channel Digital Tunable White (PSQ Series)).

#### ELECTRICAL:

Emergency Option DMX: Battery backup only.

Emergency Option DALI: Battery backup, emergency-to-generator/inverter wiring.

Emergency Option Lutron: Battery backup, emergency-to-generator/inverter wiring.

Emergency Option PoE: Contact factory.

Battery Backup: Factory-choice low-profile backup battery available. Backup batteries deliver 1700 lumens. One quarter of the 1x2 will be illuminated in emergency mode. Backup battery will operate at 6500K in emergency.

Chicago Plenum: Available on request.

**MOUNTING:** Standard flange design works with most lay-in ceiling types. Integral pry-out tabs secure the luminaire to the ceiling grid from above. Tie-in locations for tie-wire on all corners. Consult local code for appropriate tie-wire recommendations. Drywall and Surface Mount versions available; refer to separate tech sheets.

**DMX INTERCONNECTION CABLES:** Luminaires are prewired with plug-and-play interconnection cables to support easy plug-together joining of luminaire runs. If a non-FineTune DMX system has been specified, a DMX to RJ45 converter is provided.

**FINISHES:** Housing and door assembly painted with 96LG high reflectance matte white powder coat paint. Optional adder: Anti-microbial paint. Contact factory.

**FEED:** Standard with one 18-gauge single-circuit feed. 14-gauge feed available on request. DMX and power feed at same location (standard). Optional whips (with flex connectors) supplied in a maximum of 11' lengths. Lead Wires. DMX feeds cannot be cut or spliced. DMX feeds should be ordered based on fixed lengths.

**LABELS:** Luminaire and electrical components are ETL-listed conforming to UL 916, 1598, 8750, 924 in the U.S.A. and CAN/CSA C22.2 No. 205, 250, and 141 in Canada. In accordance with NEC Code 410.73 (G), this luminaire contains an internal driver disconnect. Damp Location. IC-rated. Finelite products use electronic components that are RoHS compliant, and the mechanical components of the luminaire have been verified to not knowingly contain any restricted substances listed per RoHS Directive 2002/95/EC. Finelite makes the specification process easy when putting healthier products on your projects. Simply add – RLA (Red List Approved) or – RLD (Declared Label) to your part number.

**WEIGHT:** 12 lbs maximum.

**WARRANTY:** 10-year performance-based warranty on all standard components. Qualified drivers by others and optional accessories such as emergency battery packs are covered by their individual manufacturer warranties.

### TUNABLE WHITE PRE-QUALIFIED DRIVERS BY OTHERS

DMX	DALI	POE set up	LUTRON
EldoLED	EldoLED, Crestron	Contact Factory	LUTRON

NOTE: For a complete list of system option/limitations [please click here](#).