

FINELITE

Tunable White High Performance Recessed (HPR LED) 2x2 Air Return Boosted Standard Output (B)




Date

Project

Type

Comments

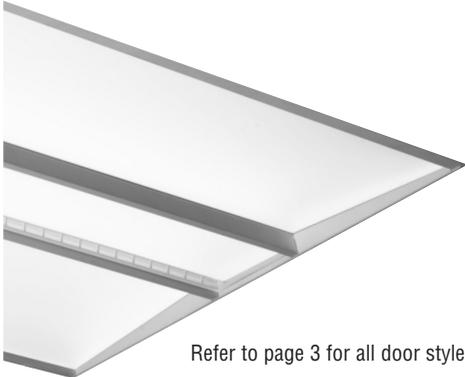

Refer to page 3 for all door styles


DESCRIPTION

HPR LED Air Return is a highly efficient recessed luminaire delivering excellent visual comfort and outstanding performance. Advanced optical design makes HPR LED Air Return a powerful solution for low-ceiling applications. HPR LED Air Return effectively removes air from the space with minimal change to the luminaire aesthetic.

This Product is enrolled in the International Living Future Institute (ILFI) Declare 2.0 Program and is third-party verified with options achieving Red List Approved and Declared status.

ORDERING GUIDE

Sample Number: HPR LED - A - 2x2 - DCO - B - 8TW - 277V - SC - C1 - AR

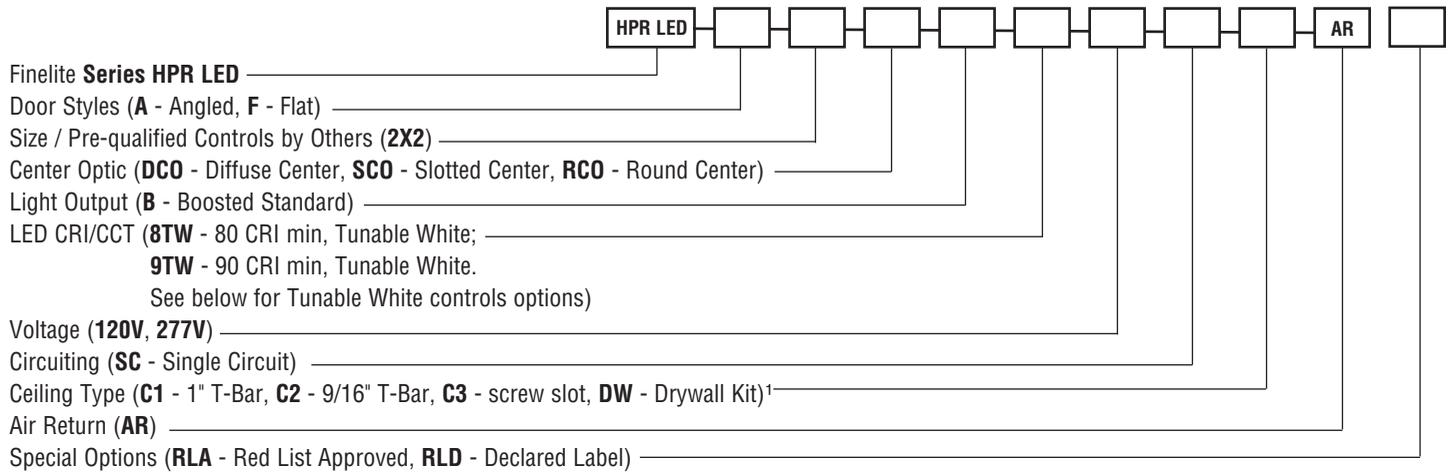

¹ Surface Mount available

TUNABLE WHITE CONTROLS OPTIONS: SELECT ONE



FineTune controller with FineTune DMX Driver

OR

- Controls by others with pre-qualified DMX driver
- Controls by others with pre-qualified DALI driver
- Controls by others with pre-qualified PoE setup
- Controls by Lutron with pre-qualified Lutron driver


A brand of legrand

Finelite, Inc. • 30500 Whipple Road • Union City, CA 94587-1530 • 510 / 441-1100 • Fax: 510 / 441-1510 • www.finelite.com

FINELITE

Tunable White High Performance Recessed (HPR LED) 2x2 Air Return Boosted Standard Output (B)

LUMINAIRE FEATURES

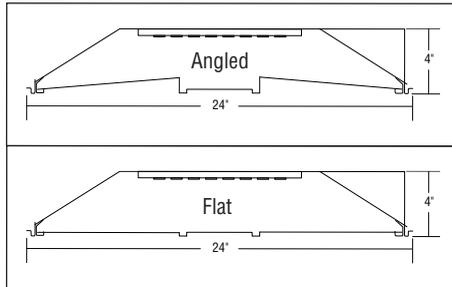


DIMENSIONS



100% SERVICEABLE FROM BELOW


The replaceable light engine and driver are easy to access from below the ceiling.

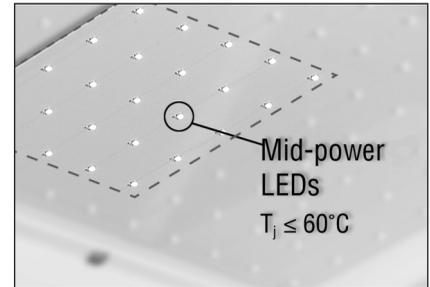

THERMAL MANAGEMENT


Mid-power LEDs allow heat to be fully dissipated without the need for additional heat sinks.

TUNABLE WHITE FEATURES

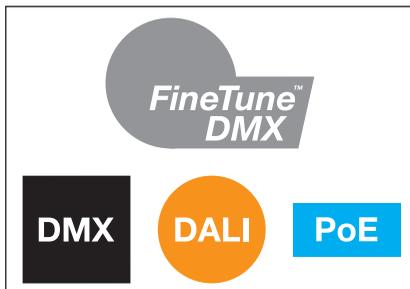

MULTIPLE CONTROL ARCHITECTURES

Finelite's FineTune™ DMX, qualified DMX, DALI (open and proprietary), or PoE (Power over Ethernet).

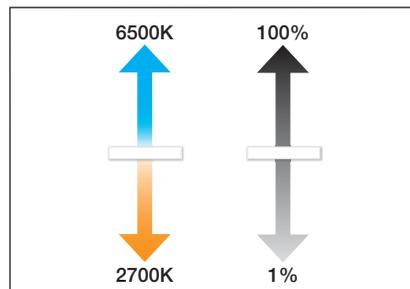

TUNABLE WHITE


Any CCT between 2700K and 6500K with excellent CRI and R9 values; dimming from 100% to 1%.



FINETUNE SYSTEM

Award-winning control system, which includes intuitive wall mounted controller, power control center, driver, and mobile app to easily tailor lighting to match user preference.


DMX CONNECTION

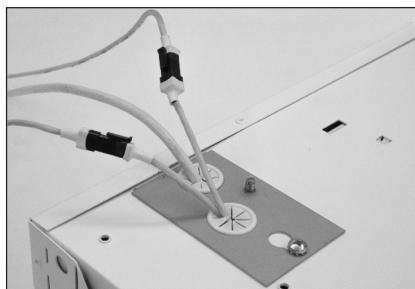


FINELITE

Tunable White High Performance Recessed (HPR LED) 2x2 Air Return Boosted Standard Output (B)

DOOR STYLES

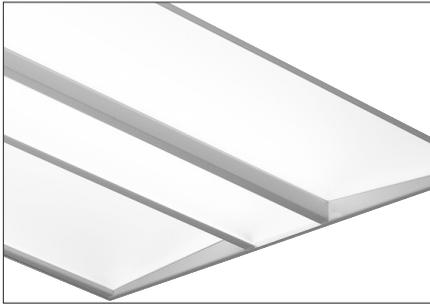

A - Angled

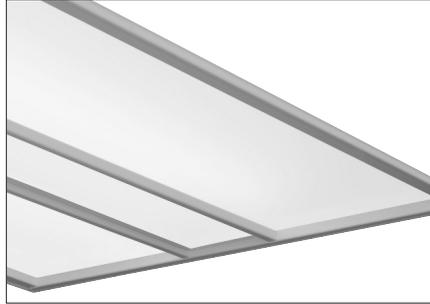

F - Flat


CENTER OPTICS



DCO - Diffuse Center



SCO - Slotted Center

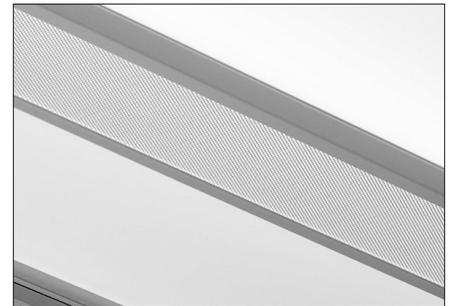


RCO - Round Center

FINELITE

Tunable White High Performance Recessed (HPR LED) 2x2 Air Return Boosted Standard Output (B)

PHOTOMETRY

HPR LED-A-2x2-DCO-V
 Boosted Standard Output - Angled Rail
 Total luminaire output: 6436 Lumens
 Peak Cadela Value: 2574 @ 0°
 CCT: 3500K
 ITL LM79 Report 85142



CANDELA DISTRIBUTION						
	0.0	22.5	45	67.5	ACROSS	Flux
0	2574	2574	2574	2574	2574	
5	2561	2561	2560	2559	2560	243
10	2519	2517	2515	2514	2514	
15	2440	2439	2441	2442	2444	688
20	2332	2333	2337	2344	2347	
25	2199	2199	2207	2217	2224	1016
30	2038	2040	2052	2070	2076	
35	1861	1863	1877	1900	1907	1175
40	1668	1671	1690	1713	1721	
45	1475	1473	1494	1517	1529	1154
50	1272	1272	1293	1314	1323	
55	1075	1074	1093	1109	1116	978
60	880	880	894	909	910	
65	693	696	702	712	718	699
70	519	519	524	532	537	
75	356	354	357	362	367	382
80	211	209	210	213	216	
85	90	87	85	83	85	101
90	0	0	0	0	0	

Angled (A) and Flat (F) Total Light Output, 3500K, 80 CRI (Lumens)	
B*	4367
Power, 3500K, 80 CRI (Watts)	
B*	40.8
Efficacy, 3500K, 80 CRI (Lumens Per Watt)	
B*	107

Lumen Adjustment Factors - 80 CRI	
2700K	0.968
3000K	0.985
3500K	1.000
4000K	1.032
6500K	1.032

Lumen Adjustment Factors - 90 CRI	
2700K	0.731
3000K	0.746
3500K	0.760
4000K	0.789
6500K	0.789

B - Boosted Standard Output

* Based on source ITL report: 85142 3500K, 80 CRI Very High Output (V) test - 120V.

Apply a lumen adjustment factor to calculate lumens for the desired CCT and CRI.

SAMPLE LUMEN ADJUSTMENT CALCULATION

$$\frac{\text{Boosted Standard Output (B)}}{\text{Angled (A) \& Flat (F)}} \times \frac{4000\text{K, 90 CRI}}{3500\text{K, 80 CRI}}$$

$$\text{Lumen Adjustment Factor} = 0.789$$

$$\text{Total Light Output} = 4367 \text{ lm} \times 0.789 = 3446 \text{ lm}$$


$$\text{Efficacy} = \frac{3446 \text{ lm}}{40.8 \text{ W}} = 84 \text{ lm/W}$$

A brand of **legrand**


FINELITE

Tunable White High Performance Recessed (HPR LED) 2x2 Air Return Boosted Standard Output (B)


CEILING SYSTEM INFORMATION



9/16" T-Bar




15/16" T-Bar



Screw Slot T-Bar

AIR HANDLING INFORMATION

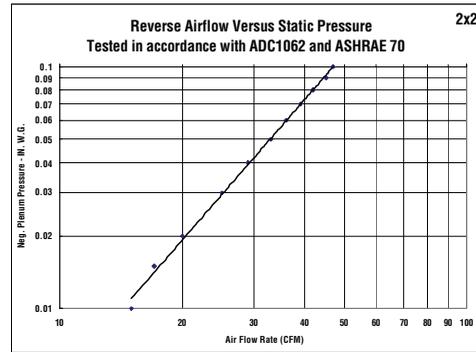

SPECIFICATIONS

CONSTRUCTION: Die-formed 20-gauge cold-rolled steel housing. All components are hard-tooled to tolerances of +/- 0.010". UV stabilized weather-strip pile gasket with polypropylene backing. Hinged door frame assembly provides easy access to light arrays and driver compartment for servicing from below. Seismic brackets are integrated into the luminaire assembly. Additional wire entrances are positioned on the ends of the housing to allow easy wiring access for the installer.

REFLECTORS: Die-formed 20-gauge cold-rolled steel reflectors are finished in 96LG high reflectance matte white powder coat paint.

AIR RETURN: Luminaire tested in accordance with ADC1062 and ASHRAE 70. Air Return slots positioned on the center optic. Diffuse Center Optic (DCO) is placed above the air return slots. Other center optics are positioned below the air return slots.

OPTICAL SYSTEM: Components include diffuser panels and a central optic element held in place with a frame constructed from die-formed cold-rolled steel. The diffusers are UV-stabilized and impact-resistant frosted virgin acrylic, 1/8" thick. They are either angled toward the central optic or parallel to the ceiling plane.

CENTER OPTIC OPTIONS: Only available with Angled (A), and Flat (F) door styles.

Diffuse Center Optic (DCO): UV-stabilized and impact-resistant frosted virgin acrylic.

Slotted Center Optic (SCO): Die-formed cold-rolled steel panel with a 1/16" x 1/2" rectangular hole pattern. Virgin acrylic overlay.

Round Center Optic (RCO): Die-formed cold-rolled steel panel with precision-punched 3/32" round hole pattern arranged in staggered formation. Virgin acrylic overlay.

TUNABLE WHITE PRE-QUALIFIED DRIVERS BY OTHERS

DMX	DALI	POE set up	LUTRON
EldoLED	EldoLED, Crestron	Contact Factory	LUTRON

NOTE: For a complete list of system option/limitations [please click here](#).

LIGHT OUTPUT: Available in Boosted Standard (B). A separate chart summarizes lumen distribution and wattage. Light engines are replaceable.

LUMEN MAINTENANCE: 90% of initial light output (L90) at 100,000+ hours; 70% of initial light output (L70) at 200,000+ hours.

TUNABLE WHITE DRIVER: Replaceable LED driver accessible from below the ceiling. 120/277V. Power factor ≥0.90. Total Harmonic Distortion (THD): <20%. Dimming Range: 100% - 1%. Expected driver lifetime: 100,000 hours.

LUTRON DRIVER OPTIONS: LutDTW (1% T-Series 2-Channel Digital Tunable White (PSQ Series)).

ELECTRICAL:

Emergency Option DMX: Battery backup only.

Emergency Option DALI: Battery backup, emergency-to-generator/ inverter wiring.

Emergency Option Lutron: Battery backup, emergency-to-generator/ inverter wiring.

Emergency Option PoE: Contact factory.

Battery Backup: Factory-choice low-profile backup battery available. Backup batteries deliver 2199 lumens. One quarter of the 2x2 will be illuminated in emergency mode. Backup battery will operate at 6500K in emergency.

MOUNTING: Standard flange design works with most lay-in ceiling types. Integral pry-out tabs secure the luminaire to the ceiling grid from above. Tie-in locations for tie-wire on all corners. Consult local code for appropriate tie-wire recommendations. Drywall and Surface Mount versions available; refer to separate tech sheets.

DMX INTERCONNECTION CABLES: Luminaires are prewired with plug-and-play interconnection cables to support easy plug-together joining of luminaire runs. If a non-FineTune DMX system has been specified, a DMX to RJ45 converter is provided.

FINISHES: Housing and door assembly painted with 96LG high reflectance matte white powder coat paint. Optional adder: Anti-microbial paint. Contact factory.

FEED: Standard with one 18-gauge single-circuit feed. 14-gauge feed available on request. DMX and power feed at same location (standard). Optional whips (with flex connectors) supplied in a maximum of 11' lengths. Lead Wires. DMX feeds cannot be cut or spliced. DMX feeds should be ordered based on fixed lengths.

LABELS: Luminaire and electrical components are ETL-listed conforming to UL 916, 1598, 8750, 924 in the U.S.A. and CAN/CSA C22.2 No. 205, 250, and 141 in Canada. In accordance with NEC Code 410.73 (G), this luminaire contains an internal driver disconnect. Damp Location. Finelite products use electronic components that are RoHS compliant, and the mechanical components of the luminaire have been verified to not knowingly contain any restricted substances listed per RoHS Directive 2011/65/EU. Finelite makes the specification process easy when putting healthier products on your projects. Simply add – RLA (Red List Approved) or – RLD (Declared Label) to your part number.

WEIGHT: 16 lbs maximum.

WARRANTY: 10-year performance-based warranty on all standard components. Qualified drivers by others and optional accessories such as emergency battery packs are covered by their individual manufacturer warranties.

A brand of **legrand**

Finelite, Inc. • 30500 Whipple Road • Union City, CA 94587-1530 • 510 / 441-1100 • Fax: 510 / 441-1510 • www.finelite.com

Due to continuing product improvements, Finelite reserves the right to change specifications without notice. Please visit www.finelite.com for most current data.