



# SERIES19

# Elegant Aesthetic. Remarkable performance. Affordable cost.

Designed specifically to deliver tailored solutions for office, healthcare, and educational projects, Series 19 is ideal for low-ceiling applications. Only 18-inch suspension is needed for the widespread distribution to deliver unparalleled ceiling uniformity on as much as 18-foot row spacing. Tailored lumen packages allow for targeted uniform illumination levels at extremely low power densities while reducing material and installation cost.

Declare 2.0

This product is enrolled in the International Living Future Institute (ILFI) Declare 2.0 Program and is third-party verified.



**High Performance:** total  
light output of  
Up to

**4660**

per 4' section

**High Efficacy:** Up to

**136**

Lumens per watt

Features

# Tailored Output

Optimizing lighting levels to accommodate architectural design elements and code requirements

- Standard (**S**)
- Boosted Standard (**B**)
- High (**H**)
- Very High (**V**)

Features

## Tailored Color

Design with the right color and CRI to suit your needs

- Static White light options at 3000K, 3500K, and 4000K CCT
- 80+ and 90+ CRI available

Features

# Tailored Control


Enhance application control  
with dimming

- Dimming from 100% to 10% standard; 1% available
- Industry-leading, pre-qualified drivers allowing the tailoring of control with 0-10V, DMX, Dali, and proprietary control platforms to meet project needs


## Series 19

Series 19 is a low-profile pendant luminaire with excellent optical performance for row spacing up to 18' while delivering recommended light levels. Achieving 90% of initial light output at 100,000+ hours and backed by a 10-year performance-based warranty on all standard components. Standard Glow Endcap increases illumination beyond luminaire ends with unique diffuse cutouts.

### Cross Section

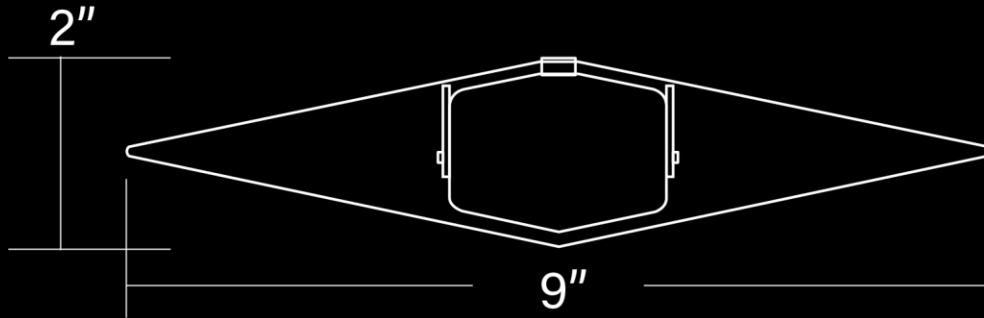


### Segmented Design

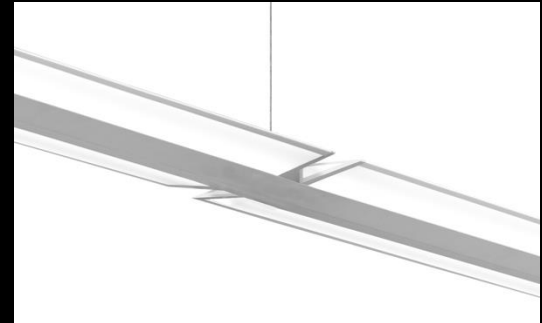

# Performance

## Indirect/Direct

4' Luminaire 3500K

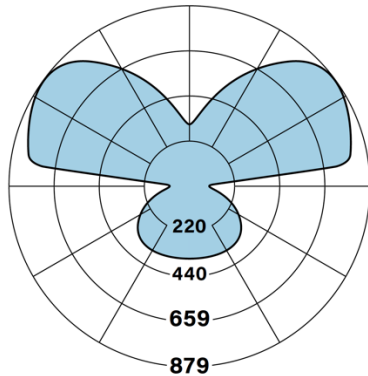

### S19-P-ID-2E-V-835-OPEN

Uplight: Open Top / Downlight: Frost Diffuser

Distribution: 70% Up / 30% Down

Efficacy: 136 lm/W

Uplight: 3278 lumens (820 lumens/ft)

Downlight: 1382 lumens (346 lumens/ft)

Total luminaire output: 4660 lumen

8.6 watts

Peak Candela Value: 877 @ 125°

CRI: 80 / CCT: 3500K

ITL LM79 Report 93789



# The Finelite Difference



10-year performance-based warranty



Ships in 10 working days for standard orders



Tailored Lighting



Buy American Act Compliance