


Submitted by:		Date:
Type:	Project:	
Ordering Info:		

High Performance 6" Aperture (HP-6) Wall Mount

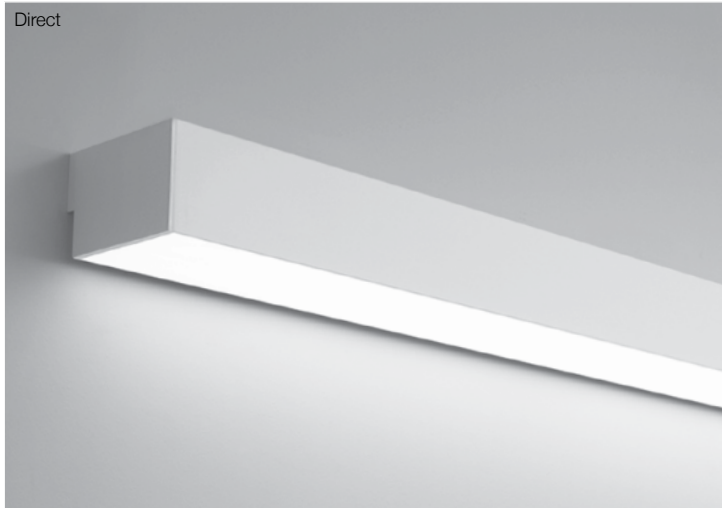

Indigo-Clean Technology is a Continuous Environmental Disinfection System that emits a narrow spectrum light that kills bacteria, Influenza-A¹, and SARS-CoV-2 – the virus that causes COVID-19¹ – and is proven effective by recently conducted independent lab testing. Unlike UV disinfection, Indigo-Clean Technology is designed to safely and continuously disinfect a space while it is fully occupied.

Single-Mode Indigo-Clean Technology utilizes a combination of blended white LEDs and 405nm LEDs on a single circuit board design. When the luminaires are on, the disinfection is active.

Dual-Mode Indigo-Clean Technology utilizes a mid-power of blended white LEDs and 405nm LEDs on a two circuit board design and full 405nm indigo light using automated controls to disinfect the space. When the space is unoccupied, it utilizes just the 405nm LEDs with increased output to increase disinfection efficacy.


These products are enrolled in the International Living Future Institute (ILFI). Declare 2.0 Program and is third-party verified with options achieving. **Red List Approved** and **Red List Declared** status.

Signal White is standard finish

Note: see page 6 for all aesthetic options

CROSS SECTIONS

Wall Mount Direct



Flush Downlight Diffuser
(standard)

ALSO AVAILABLE IN



Declare.



Indigo-Clean is a registered trademark of Kenall Manufacturing Co., a Legrand Company

¹ [Indigo-Clean Research Reports](#)

Submitted by:		Date:
Type:	Project:	
Ordering Info:		

High Performance 6" Aperture (HP-6) Wall Mount

Ordering Guide Example: HP - 6 - WM - D - 36' - H - 837 - F - 96LG - 120 - SC - FC-10% - MB - FE - SW - LGD18W - OBO - RLD

BODY TYPE				OUTPUT AND LED TYPE	
Platform	Series Name	Luminaire Type	Luminaire Distribution	Total Length of Run	Downlight Output (Flush)
HP - High Performance	6	WM - Wall Mount	D - Direct	<div>Minimum 2' section length. Increments accurate to 1/16" (±1/32"), standard. 12' maximum section length.</div>	<div>H - High (670 lm/ft) V - Very High (862 lm/ft) TL - Tailored: _____ lm/ft*</div> <div>* Specify lm/ft of outputs between High (H) and Very High (V). Consult factory for tailored lumen output outside of this range.</div>

OUTPUT and LED TYPE	MECHANICAL OPTIONS	ELECTRICAL OPTIONS		
LED CRI/CCT	Downlight	Reflector System	Voltage	Circuiting ¹
<div>832-SMIC - 80 CRI, 3200K Single Mode Indigo-Clean 837-SMIC - 80 CRI, 3700K Single Mode Indigo-Clean 843-SMIC - 80 CRI, 4300K Single Mode Indigo-Clean 832-DMIC - 80 CRI, 3200K Dual Mode Indigo-Clean 837-DMIC - 80 CRI, 3700K Dual Mode Indigo-Clean 843-DMIC - 80 CRI, 4300K Dual Mode Indigo-Clean</div>	F - Flush (standard)	96LG - 96 Low Gloss White	<div>120 - 120 Voltage 277 - 277 Voltage 347 - 347 Voltage</div>	<div>SC - Single Circuit* One single circuit in a run MC - Multi-Circuit* More than one switch leg or zone. Factory shop drawings required</div> <div>* Battery, Night Light, and Emergency to Generator circuits are in addition to the normal luminaire circuit(s)</div>

ELECTRICAL OPTIONS		MOUNTING OPTIONS	OTHER OPTIONS	
Driver Selection		Mounting Method	Endcap Style	Finish
<div>0-10V Driver Options FC-10% - 0-10V 10% (standard) FC-1% - 0-10V 1% OTi-10% - EldoLED OTi, 0-10V 10% ² OTi-1% - EldoLED OTi, 0-10V 1% ² ELD-10V-0% - EldoLED SOLOdrive, 0-10V 0.1%</div> <div>DALI Driver Options FC-DALI-1% - DALI 1% DXL-DALI-1% - EldoLED Dexal, 1% ELD-DALI-0% - EldoLED SOLOdrive, 0.1%</div>		MB - Mounting Bracket	FE - Flat Endcap (standard)	<div>SW - Signal White (standard) FB - Finelite Black SA - Satin Aluminum #### - RAL Color Code ³ _____</div>
<div>DMX Driver Options ELD-DMX - EldoLED POWERdrive, 0.1%</div> <div>Lutron Driver Options LUT-ES1 - Lutron, Ecosystem 1%</div> <div>See Page 3 for additional driver options and details</div>				

OTHER OPTIONS		
Emergency Style (Optional) See page 5 Backup Battery table	Integrated Sensor (Optional)	Special Options (Optional)
<div>LGD18W - Legrand 18W Brand Battery Back-up LGD10W - Legrand 10W Brand Battery Back-up EM/GEN - Emergency to Generator NL - Night Light BSL722 - Bodine Battery Back up BSL310LP - Bodine Battery Back up Low Profile GTD - Generator Transfer Device ALCR - Automatic Load Control Relay</div>	<div>OBO - Occupancy OBD - Daylight W601 - Wattstopper Wireless Sensor ⁴ OBE - Enlighted ⁵ CLM-99 - Encelium RF SLM-99 - Encelium Sensor AOCC-W - Lutron Athena Sensor (Device Color White) ⁶ AOCC-B - Lutron Athena Sensor (Device Color Black) ⁶ ARF-W - Lutron Athena RF (Device Color White) ⁶ ARF-B - Lutron Athena RF (Device Color Black) ⁶ VOCC - Lutron Vive Sensor ⁷ VRF - Lutron Vive RF ⁷</div> <div>Integrated Sensor not available for Dual-Mode</div>	<div>RLA - Red List Approved RLD - Red List Declared</div>

¹ Contact factory for switching options
² Add DTO to gain "Dim to Off" functionality (FC-10% - DTO, FC-1% - DTO). Not available with Dual-Mode.
³ 20 business days lead time for color
⁴ LMFS-601 w/ 0-10V driver(s) and LMFI-111, up to 6 drivers may be connected. LMFS-601 w/ Dali driver, only 1 driver can be connected
⁵ Enlighted components installed by Finelite, provided by others

⁶ 0-10V Drivers - **AOCC** up to 10 drivers may be connected; **ARF** up to 40 drivers may be connected
DALI Drivers - **AOCC** & **ARF** up to 4 drivers can be connected.
⁷ Lutron Vive Ingrated Sensors require a DALI driver

Submitted by:		Date:
Type:	Project:	
Ordering Info:		

High Performance 6" Aperture (HP-6) Wall Mount

SUPPLEMENTARY DRIVER PAGE

0-10V Driver Options

FC-10%	Factory Choice, 0-10V 10% Dimming (Linear)
FC-10%-DTO	Factory Choice, 0-10V 10% Dimming, Dim-to-Off (Linear)
FC-1%	Factory Choice, 0-10V 1% Dimming (Linear)
FC-1%-DTO	Factory Choice, 0-10V 1% Dimming, Dim-to-Off (Linear)
ELD-10V-0%	EldoLED SOLOdrive, 0-10V 0.1% Dimming (Linear)
ELD-10V-1%	EldoLED ECOdrive, 0-10V 1% Dimming (Linear)
OTi-10%	EldoLED OTi, 0-10V 10% Dimming (Linear)
OTi-10%-DTO	EldoLED OTi, 0-10V 10% Dimming, Dim-to-Off (Linear)
OTi-1%	EldoLED OTi, 0-10V 1% Dimming (Linear)
OTi-1%-DTO	EldoLED OTi, 0-10V 1% Dimming, Dim-to-Off (Linear)

DALI Driver Options

FC-DALI-1%	Factory Choice, DALI 1% Dimming (Logarithmic)
DXL-DALI-1%	EldoLED Dexal, DALI 1% Dimming (Logarithmic)
ELD-DALI-0%	EldoLED SOLOdrive, DALI 0.1% Dimming (Logarithmic)
ELD-DALI-1%	EldoLED ECOdrive, DALI 1% Dimming (Logarithmic)

DMX Driver Options

ELD-DMX	EldoLED POWERdrive, DMX 0.1% Dimming (8 Bit, 1CH) (Linear)
ELD-DMX-16	EldoLED POWERdrive, DMX 0.1% Dimming (16 Bit, 2CH) (Linear)

Lutron Driver Options

LUT-ES1	Lutron, Ecosystem 1% Dimming
----------------	------------------------------

Submitted by:		Date:
Type:	Project:	
Ordering Info:		

High Performance 6" Aperture (HP-6) Wall Mount

SPECIFICATIONS

BODY TYPE

CONSTRUCTION: Precision-cut 6063-T6 extruded aluminum body. Internal joiner system, plug-together wiring, standard.

LENGTHS: Any length, 2' minimum, in increments down to 1/16" ($\pm 1/32"$). 12' maximum section length.

MITERED CORNERS: Fully illuminated 90° corners in a single plane, with Flush diffuser, standard. Custom angles are available (90° minimum on inside corners). Consult factory for tailored lighting options.

OUTPUT AND LED TYPE

LIGHT OUTPUT: Lumen packages available for **HP-6 D:** High (**H**), and Very High (**V**). For Tailored Outputs outside of range from High (**H**) to Very High (**V**), consult factory. Light engines are replaceable.

INDIGO-CLEAN TECHNOLOGY: Indigo-Clean Technology utilizes a combination of blended white LEDs, and safe 405nm LEDs to continually disinfect a space and kill bacteria, Influenza-A¹, and SARS-CoV-2 – the virus that causes COVID-19¹. Unlike UV disinfection, Indigo-Clean Technology is designed to safely and continuously disinfect a space while it is fully occupied. When the Indigo-Clean Technology light is on, disinfection is active. For optimum performance, continuously provide an average 50-60 footcandles on the work plane and high touch surfaces (24/7). Dimming generally reduces effectiveness and increases the variation in the disinfecting light's visual appearance.

Single-Mode Indigo-Clean Technology: Continuous environmental disinfection system that uses a blended white LEDs and 405nm Indigo-Clean LEDs. The narrow spectrum light provides a safe visible light that disinfects the space. When the light is on, disinfection is active.

Dual-Mode Indigo-Clean Technology: Utilizes a two circuit board design. When the space is occupied it utilizes a combination of blended white LEDs and 405nm LEDs. When the space is unoccupied, it utilizes just the 405nm LEDs with increased output to increase disinfection efficacy.

Dual-Mode Indigo-Clean Technology Controller: It is a low-voltage internal device that determines the operational mode based on the input received from the external automated controls. An Off manual push will not turn the lights off, but rather turn the lights to Blue Mode. Please refer to Dual-Mode Application Guide for wiring diagram. Dim to Off not available.

MECHANICAL/OPTICAL OPTIONS

DOWNLIGHT OPTION: 12' maximum diffuser length. Flush frost white snap-in diffuser standard, 73% transmissive, 99% diffusion. Internal secondary diffusers at corners ensure visually seamless, uniform, continuous illumination. Available with Flush (**F**) downlight diffusers. Consult factory for more tailored lumen outputs.

LUMEN MAINTENANCE: White LEDs: 90% of initial light output (L90) at 100,000+ hours; 70% of initial light output (L70) at 200,000+ hours. 405nm LEDs: 70% of initial output at L70 @ 60,000 hours.

REFLECTORS: Die-formed 20-gauge cold-rolled steel reflectors finished in 96LG High Reflectance white powder coat paint.

ELECTRICAL FEATURES

STATIC WHITE FEED: Standard with one 18-gauge/5-conductor single-circuit feed. 14- gauge feed used when luminaire current exceeds 5 amps.

STATIC WHITE DRIVER: Replaceable 120V, 277V, and 347V Constant Current Reduction dimming driver standard. Can be wired dimming or non-dimming. 0-10V dimming controls with a range of 10%- 100% standard. Dimming to 1% available. Driver is fully accessible from below the ceiling.

- **Power Factor:** ≥ 0.9
- **Total Harmonic Distortion (THD):** <20%
- **Expected driver lifetime:** 100,000 hours

LUTRON DRIVER OPTIONS:

- **LUT-ES1 (LDE1)** - (Hi-lume 1% EcoSystem with Soft-On, Fade-to-Black dimming (LDE1 series))

MOUNTING OPTIONS

HANGING HARDWARE: Luminaire hangs securely from mounting brackets fastened directly to the wall for easy installation. Luminaire stands 1/2" off the wall. The mounting bracket is concealed behind the luminaire.

OTHER OPTIONS

ENDCAPS: Flat diecast aluminum endcaps (**FE**) add 1/4" to each end of luminaire.

EMERGENCY STYLE: Optional emergency to generator/inverter wiring, internal generator transfer switch, nightlight wiring, step-dimming driver, backup battery.

Submitted by:		Date:
Type:	Project:	
Ordering Info:		

High Performance 6" Aperture (HP-6) Wall Mount

SPECIFICATIONS

Backup Battery		
	Legrand 18W	Legrand 10W / Bodine BSL310LP
HP6-WM-D		
Min. Housing Length	6'	4'
EM Lumen Output	1724	1026
EM Section Illum.	2'	2' or 4'

Based on 3700K and 80-CRI.

* Minimum fixture housing length for battery pack approved without sensor

The lumens are based on 835. For other CCT/CRI, refer to the Lumen Adjustment Factor table on page 6.

INTEGRATED SENSORS: Integrated PIR (Passive Infrared) occupancy or daylight sensors available with Flush downlight diffusers. Refer to Occupancy Sensor, Daylight Sensor, and Enlighted Sensor tech sheets for more info. Integrated Sensor not available for Dual-Mode.

PATENT: Indigo-Clean products and technology covered by U.S. Patent No.US 9,039,966 and US 8,398,264. Product may also be covered by patents found at www.kenall.com/patents.

FINISHES: Finelite Signal White (**SW**) powder coat, Finelite Black (RAL 9005) with semi gloss fine texture (**FB**) and Satin Aluminum (**SA**) are standard. Optional Adders: 179 RAL colors².

LABELS: Luminaire and electrical components are ETL-listed conforming to UL 1598 in the U.S.A. and CAN/CSA C22.2 No. 250.0 in Canada. In accordance with NEC Code 410.130 (G), this luminaire contains an internal driver disconnect. UL 924 and UL 2108 - PoE options available on request. EPA Est.No. 99530-CA-2. These fixtures are rated for Damp Location. Chicago Plenum options available for C1, C2, or C3 suspension using our GridBox. Finelite products use electronic components that are RoHS compliant, and the mechanical components of the luminaire have been verified to not knowingly contain any restricted substances listed per RoHS Directive 2015/863. Consult factory for tailored lighting options. Finelite makes the specification process easy when putting healthier products on your projects. Simply add – **RLA** (Red List Approved) or – **RLD** (Red List Declared) to your part number.

WEIGHT³: D - 3.6 lb/ft

WARRANTY: 5-year performance-based warranty on all standard components. Optional accessories such as emergency battery packs are covered by their individual manufacturer warranties.

² 20 business days lead time for color

³ Excludes Battery Back up and Generator Transfer Device weight

Submitted by:		Date:
Type:	Project:	
Ordering Info:		

High Performance 6" Aperture (HP-6) Wall Mount

Direct Photometry - 4' Luminaire 3700K

HP6-WM-D-4'-V-837-F

Downlight: Flush Diffuser



Efficacy: 98 lm/W

Total luminaire output: 3446 lumens (862 lm/ft)
35.2 watts (8.8 W/ft)

Peak Candela Value: 1242 @ 0°

CRI: 80 / CCT: 3700K

TL LM79 Report 85124 (Family Correlated)



CANDELA DISTRIBUTION						
	0.0	22.5	45.0	67.5	90.0	FLUX
0	1242	1242	1242	1242	1242	
5	1235	1235	1234	1234	1234	126
15	1179	1170	1175	1174	1168	355
25	1069	1056	1060	1054	1048	523
35	917	906	906	897	891	607
45	743	734	733	723	719	606
55	560	553	551	543	539	529
65	375	374	373	368	367	395
75	204	204	205	203	204	233
85	58	59	60	61	60	71
90	0	0	0	0	0	

Information in chart below is for reference and based on ITL LM79 report 94139 (Family Correlated)

Total Light Output, 3700K, 80 CRI (Lumens) - 4' Luminaire					
H ¹			V		
2680			3446		

Light Output, 3700K, 80 CRI (Lumens Per Foot)					
H ¹			V		
670			862		

Single Mode Power, 3700K (Watts Per Foot)					
H ¹			V		
6.8			8.8		

Dual Mode Power, 3700K (Watts Per Foot)					
H ¹			V		
Occupied	LPD	Unoccupied	Occupied	LPD	Unoccupied
6.9	5.4	4.1	9.0	7.0	5.2

Efficacy, 3700K, 80 CRI (Lumens Per Watt)					
H ¹			V		
99			98		

1 Family Correlation based on 4' luminaire 3700K Very High Output (V) test - 120V.
H - High Output, V - Very High Output

Wattage is Real Power. If you would like additional details to calculate Apparent Power, please contact your local Finelite representative.

- Use **Occupied Power** for total electrical load calculations. Use this value to estimate branch circuit lighting loads.
- Use **LPD Power** for lighting power density calculations. Only the power attributed to white light is required per NEMA LSD EB 84-202X. Power used toward germicidal disinfection has been removed for this calculation.
- Use **Unoccupied** and **Occupied Power** for energy calculations to determine the power consumed over time based on the use of the space.


Sample Lumen Adjustment Calculation

Lumen Adjustment Factors 80 CRI	
Indigo-Clean	
3200K	0.98
3700K	1.00
4300K	1.03

FLUSH: Very High Output (V), 3200K, 80 CRI
Lumen Adjustment Factor: 0.98
Total Light Output: 3446 lm x 0.98 = 3377 lm
Total Light Output per Foot: 862 lm/ft x 0.98 = 845 lm/ft.
watts/foot: 8.8 W/ft.
Efficacy = $\frac{845 \frac{\text{lm}}{\text{ft.}}}{8.8 \frac{\text{W}}{\text{ft.}}} = 96 \text{ lm/W}$

Indigo Clean Dual Mode - Basic Wiring Diagram

WIRING DIAGRAM

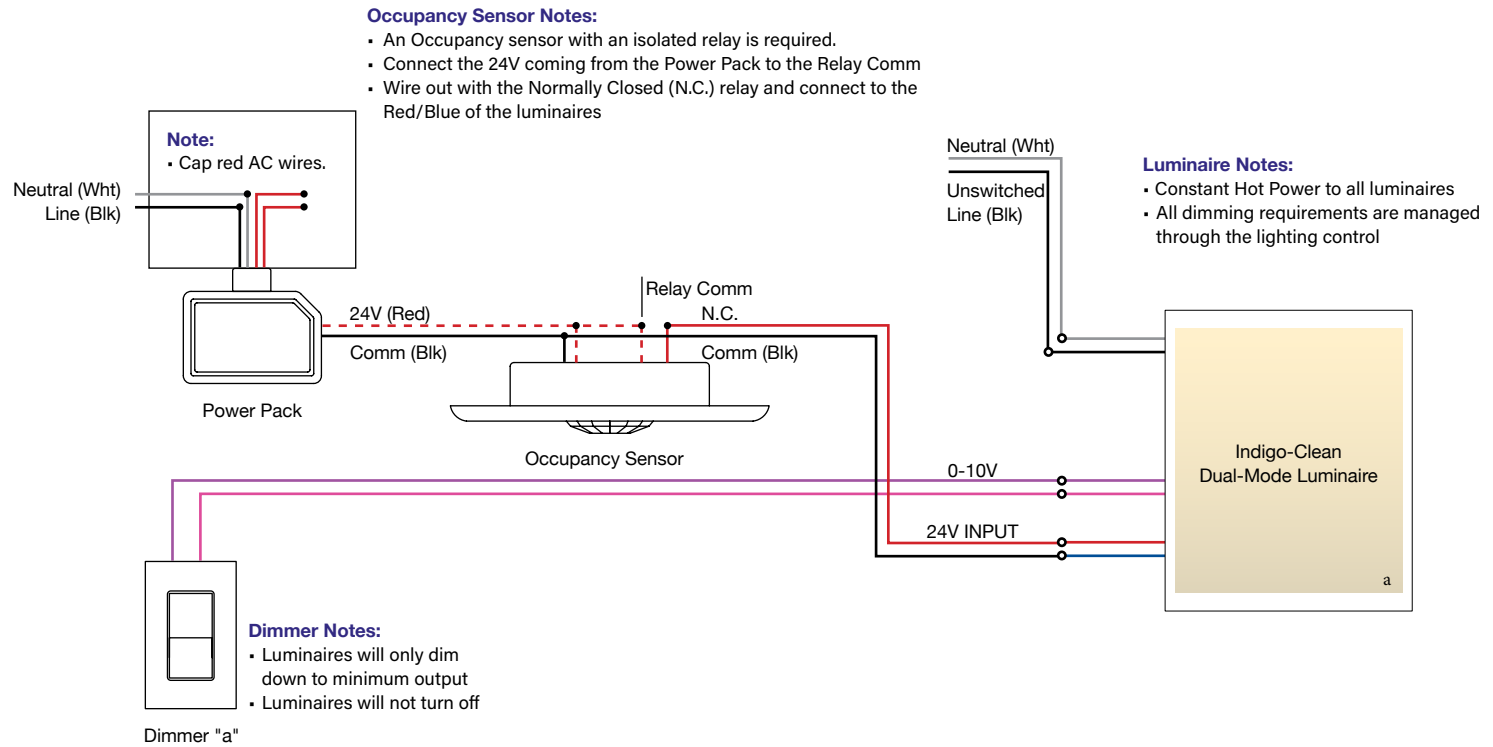

DUAL FEED DETAIL

