

Family Correlated Photometric Data

The following photometric information is developed using correlated data. Finelite considers a family to be a group of luminaires where critical performance metrics such as photometric performance, thermal performance, and electrical performance can be accurately projected via a combination of LM79 tests at the luminaire level and well-documented specifications at the component level.

For more information, please download [Finelite's Family Correlated White Paper](#)

Additional links:

- [Solid-State Lighting: Early Lessons Learned on the Way to Market](#)
(U.S. Department of Energy)
- [Lighting Facts®](#)
- [Design Lights Consortium®](#)

IES INDOOR REPORT

PHOTOMETRIC FILENAME : HP-2-ID-4FT-V-B-8TW-WSO-DSO-ABL-8H-ITL89456-ITL94139.905.IES

DESCRIPTION INFORMATION (From Photometric File)

[TEST]ITL89456-ITL94139.905 Family Correlation File

[TESTLAB]INDEPENDENT TESTING LABORATORIES, INC.

[TESTDATE]07/19/17

[ISSUEDATE]06/23/2021

[MANUFAC]FINELITE, INC.

[LUMCAT]HP-2-ID-4ft-V-B-8TW-WSO-DSO-ABL-8H

[_INPUT_ELECTRICAL]120.0 VOLTS, 59.5 WATTS

[_INPUT_ELECTRICAL]277.0 VOLTS, 61.5 WATTS

[OTHER]see www.finelite.com for source files ITL89456 and ITL94139. For further details on Finelite family correlation files, go to

[more]http://www.finelite.com/download_files/series_downloads/photometry_pdf/FL_Family_Correlation_WhitePaper.pdf

[_ABSOLUTE]LUMENS]5702

CHARACTERISTICS

Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	5702
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	105
Total Luminaire Watts	54.1
Ballast Factor	1.00
CIE Type	Semi-Indirect
Spacing Criterion (0-180)	N.A.
Spacing Criterion (90-270)	N.A.
Spacing Criterion (Diagonal)	N.A.
Basic Luminous Shape	Rectangular
Luminous Length (0-180)	4.00 ft
Luminous Width (90-270)	0.18 ft
Luminous Height	0.00 ft

LUMINANCE DATA (cd/sq.m)

Angle In Degrees	Average 0-Deg	Average 45-Deg	Average 90-Deg
45	7114	8992	9235
55	6469	8280	8280
65	5804	7356	7153
75	5161	6278	5946
85	4481	4750	4302

IES INDOOR REPORT**PHOTOMETRIC FILENAME : HP-2-ID-4FT-V-B-8TW-WSO-DSO-ABL-8H-ITL89456-ITL94139.905.IES****CANDELA TABULATION**

	<u>0.0</u>	<u>22.5</u>	<u>45.0</u>	<u>67.5</u>	<u>90.0</u>
0.0	599.922	599.922	599.922	599.922	599.922
2.5	598.893	598.893	599.407	600.436	600.436
5.0	595.806	596.320	598.893	601.465	602.494
7.5	590.146	592.204	596.835	602.494	605.581
10.0	582.943	585.515	595.806	606.611	610.212
12.5	574.196	577.283	594.777	609.698	613.814
15.0	562.362	567.508	591.690	610.727	615.872
17.5	550.014	556.703	587.573	610.727	616.901
20.0	534.579	544.354	582.428	608.154	614.843
22.5	518.114	529.948	573.682	602.494	610.212
25.0	499.592	515.542	563.906	594.777	601.980
27.5	481.069	500.106	552.587	583.972	591.175
30.0	461.003	483.642	538.180	569.566	575.225
32.5	440.423	465.120	523.259	553.101	557.732
35.0	418.813	445.568	506.281	533.035	536.122
37.5	397.718	426.017	486.214	510.911	512.455
40.0	375.080	405.436	464.605	487.243	486.214
42.5	353.470	383.827	442.481	460.489	458.431
45.0	331.346	361.702	418.813	433.220	430.133
47.5	309.737	339.578	393.088	404.921	401.834
50.0	287.098	316.940	366.848	375.594	370.449
52.5	264.974	293.272	340.093	346.782	341.636
55.0	244.393	270.119	312.824	316.940	312.824
57.5	222.784	246.966	285.555	288.127	281.438
60.0	202.203	223.298	258.285	260.343	253.655
62.5	182.652	200.660	232.045	231.531	226.386
65.0	161.557	179.050	204.776	204.262	199.116
67.5	143.035	156.926	179.050	177.507	172.362
70.0	123.998	135.831	154.354	151.781	147.151
72.5	105.475	115.251	130.172	127.599	123.483
75.0	87.982	95.185	107.019	104.446	101.359
77.5	71.517	76.662	84.895	82.322	79.749
80.0	56.082	58.654	64.829	61.742	59.684
82.5	41.161	42.190	45.277	43.219	41.675
85.0	25.726	26.755	27.269	25.726	24.697
87.5	11.834	11.834	10.805	10.290	9.261
90.0	0.000	0.000	0.000	0.000	0.000
92.5	18.000	31.000	31.000	30.000	30.000
95.0	47.000	83.000	83.000	69.000	68.000
97.5	79.000	136.000	167.000	120.000	113.000
100.0	112.000	177.000	332.000	193.000	170.000
102.5	148.000	216.000	459.000	341.000	271.000
105.0	183.000	258.000	532.000	556.000	458.000
107.5	218.000	299.000	577.000	750.000	699.000
110.0	253.000	337.000	617.000	864.000	873.000
112.5	288.000	374.000	664.000	939.000	977.000
115.0	324.000	409.000	720.000	993.000	1048.000
117.5	360.000	444.000	781.000	1044.000	1103.000
120.0	396.000	481.000	831.000	1098.000	1158.000
122.5	429.000	512.000	867.000	1174.000	1216.000
125.0	460.000	542.000	887.000	1257.000	1299.000
127.5	489.000	570.000	899.000	1313.000	1391.000
130.0	513.000	594.000	906.000	1336.000	1457.000
132.5	537.000	616.000	908.000	1327.000	1478.000

IES INDOOR REPORT**PHOTOMETRIC FILENAME : HP-2-ID-4FT-V-B-8TW-WSO-DSO-ABL-8H-ITL89456-ITL94139.905.IES****CANDELA TABULATION - (Cont.)**

135.0	558.000	634.000	907.000	1299.000	1457.000
137.5	577.000	651.000	904.000	1261.000	1413.000
140.0	596.000	666.000	899.000	1219.000	1357.000
142.5	614.000	680.000	892.000	1172.000	1297.000
145.0	633.000	693.000	885.000	1127.000	1236.000
147.5	649.000	703.000	877.000	1081.000	1174.000
150.0	665.000	714.000	867.000	1040.000	1116.000
152.5	680.000	722.000	855.000	1001.000	1062.000
155.0	694.000	728.000	843.000	963.000	1012.000
157.5	707.000	736.000	832.000	928.000	967.000
160.0	718.000	741.000	819.000	894.000	925.000
162.5	728.000	745.000	806.000	865.000	886.000
165.0	736.000	749.000	793.000	837.000	853.000
167.5	743.000	752.000	783.000	813.000	824.000
170.0	749.000	755.000	776.000	794.000	801.000
172.5	752.000	757.000	768.000	778.000	784.000
175.0	756.000	758.000	763.000	768.000	770.000
177.5	758.000	758.000	760.000	760.000	761.000
180.0	759.000	759.000	759.000	759.000	759.000

IES INDOOR REPORT**PHOTOMETRIC FILENAME : HP-2-ID-4FT-V-B-8TW-WSO-DSO-ABL-8H-ITL89456-ITL94139.905.IES****ZONAL LUMEN SUMMARY**

Zone	Lumens	%Lamp	%Fixt
0-20	223.70	N.A.	3.90
0-30	479.85	N.A.	8.40
0-40	786.28	N.A.	13.80
0-60	1356.9	N.A.	23.80
0-80	1654.18	N.A.	29.00
0-90	1684.25	N.A.	29.50
10-90	1627.18	N.A.	28.50
20-40	562.58	N.A.	9.90
20-50	869.79	N.A.	15.30
40-70	761.20	N.A.	13.30
60-80	297.29	N.A.	5.20
70-80	106.70	N.A.	1.90
80-90	30.07	N.A.	0.50
90-110	525.79	N.A.	9.20
90-120	1219.49	N.A.	21.40
90-130	2012.46	N.A.	35.30
90-150	3325.54	N.A.	58.30
90-180	4017.8	N.A.	70.50
110-180	3492.02	N.A.	61.20
0-180	5702.05	N.A.	100.00

Total Luminaire Efficiency = N.A. %

ZONAL LUMEN SUMMARY

Zone	Lumens
0-10	57.07
10-20	166.63
20-30	256.15
30-40	306.43
40-50	307.21
50-60	263.41
60-70	190.59
70-80	106.70
80-90	30.07
90-100	91.71
100-110	434.08
110-120	693.70
120-130	792.97
130-140	741.14
140-150	571.94
150-160	393.14
160-170	225.92
170-180	73.20

IES INDOOR REPORT

PHOTOMETRIC FILENAME : HP-2-ID-4FT-V-B-8TW-WSO-DSO-ABL-8H-ITL89456-ITL94139.905.IES

COEFFICIENTS OF UTILIZATION - ZONAL CAVITY METHOD


Effective Floor Cavity Reflectance 0.20

RC	80				70				50			30			10			0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
0	102	102	102	102	92	92	92	92	72	72	72	54	54	54	37	37	37	30
1	93	89	85	82	83	80	77	74	63	61	59	47	46	45	33	32	31	25
2	85	78	72	67	76	70	65	61	55	52	49	42	39	37	29	28	26	21
3	77	68	61	55	69	61	55	51	49	44	41	37	34	32	26	24	22	18
4	71	60	53	47	63	54	48	43	43	38	35	33	29	27	23	21	19	15
5	65	54	46	40	58	48	42	36	38	34	30	29	26	23	21	18	17	13
6	60	48	40	34	53	43	36	32	34	30	26	26	23	20	19	16	15	11
7	55	43	35	30	49	39	32	27	31	26	23	24	20	18	17	15	13	10
8	51	39	31	26	45	35	29	24	28	23	20	22	18	16	16	13	12	9
9	47	35	28	23	42	32	26	21	26	21	18	20	16	14	14	12	10	8
10	44	32	25	21	39	29	23	19	24	19	16	18	15	13	13	11	9	7

IES INDOOR REPORT

PHOTOMETRIC FILENAME : HP-2-ID-4FT-V-B-8TW-WSO-DSO-ABL-8H-ITL89456-ITL94139.905.IES

POLAR GRAPH

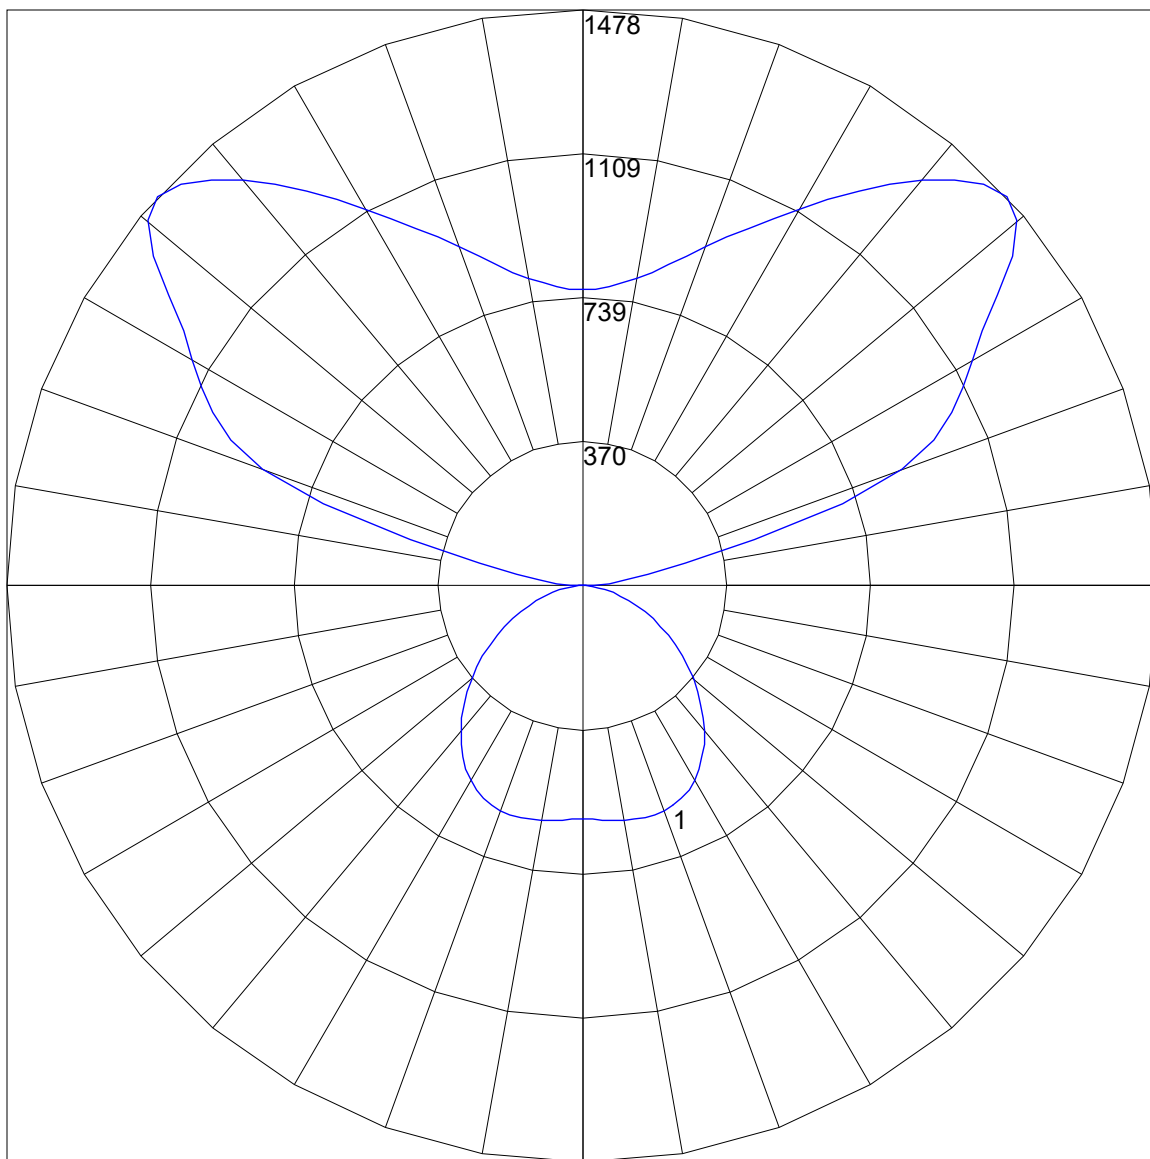

Maximum Candela = 1478 Located At Horizontal Angle = 90, Vertical Angle = 132.5

1 - Vertical Plane Through Horizontal Angles (90 - 270) (Through Max. Cd.)