



Series 17 LED

ADA-Compliant Wall Mount Luminaire

A brand of **legrand**



FINELITE[®]
Better Lighting

Series 17 LED

ADA-Compliant Wall Mount Luminaire

Series 17 is an ADA-compliant wall mount luminaire designed with the understanding that shape can transform the experience of a space. Combining ADA compliance with the functionality of superior optical performance and energy saving bi-level controls, this luminaire is ideal for a number of applications, including corridors and stairwells in offices, schools, healthcare facilities and multi-family residential buildings.

This product is enrolled in the International Living Future Institute (ILFI) Declare 2.0 Program and is third-party verified with options achieving Red List Approved and Declared status.



Features

Tailored Output

Optimizing lighting levels to accommodate architectural design elements and code requirements.

Static White Output Options:

- Standard (S)
- Boosted Standard (B)
- High (H)
- Very High (V)

Tunable White Output Options:

- Boosted Standard (B)
- Very High (V)

Features

Tailored Color

Tune white light and intensity to the preferences of the people in the space.



- Static White light options at 3000K, 3500K and 4000K CCT
- Tunable White option for two-source tunable white light between 2700K and 6500K CCT
- 80+ and 90+ CRI options available

Features


Tailored Control

Dim and tune the lighting to fit user preference.


- Dimming from 100% to 10%, standard; 1% available
- Industry-leading pre-qualified drivers and controls options available
- Occupancy sensor option available
- Simplified white light color tuning design

Design Alternatives


Series 17 features two timeless shapes. The Angled Curved Fascia (ACF) uses strong, clean lines and the Vertical Curved Fascia (VCF) uses simple, subtle lines allowing Series 17 to blend into a variety of architectural designs.

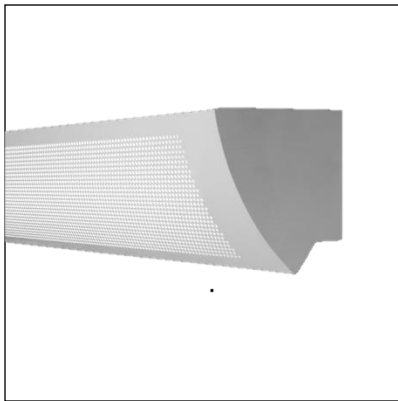


ACF Perforated (ACF-PF)

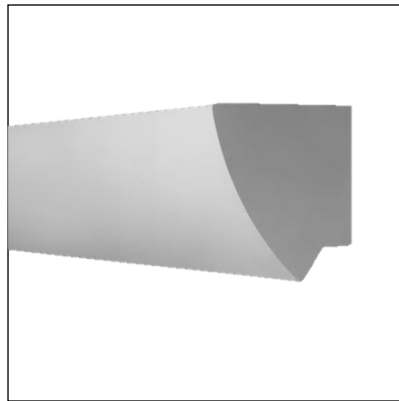

ACF Solid (ACF-SF)

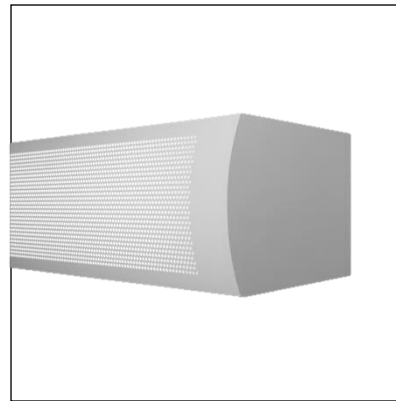

VCF Perforated (VCF-PF)

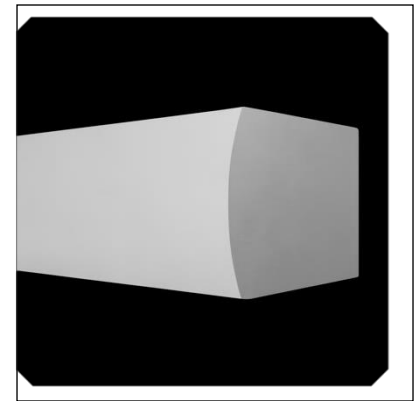

VCF Solid (VCF-SF)

Performance

Series 17 LED ACF SF



Very High Output – 4' Luminaire

Efficacy: 72 lumens per watt

Total Luminaire Output: 2673 lumens (668 lumens/foot)
37.1 watts (9.3 watts/foot)

CCT: 3500K

ITL LM79 Report 85160



Total Light Output, 3500K, 80 CRI (Lumens)			
S*	B*	H*	V**
1094	1376	2079	2673

Linear Light Output, 3500K, 80 CRI (Lumens/Foot)			
S*	B*	H*	V**
274	344	520	668

Power, 3500K, 80 CRI (Watts/Foot)			
S*	B*	H*	V**
3.6	4.6	7.1	9.3

Efficacy, 3500K, 80 CRI (Lumens/Watt)			
S*	B*	H*	V**
76	75	73	72

S – Standard Output, B – Boosted Standard Output, H – High Output, V – Very High Output

* Family Correlation based on 4' luminaire 3500K Very High Output (V) test – 120V

** Correlation based on ITL report: 85160

Notes

- For Tunable White data please see Tunable White technical sheets.
- For fluorescent data please see fluorescent technical sheets.

Performance

Series 17 LED VCF SF

Very High Output – 4' Luminaire



Efficacy: 88 lumens per watt

Total Luminaire Output: 3222 lumens (806 lumens/foot)

36.8 watts (9.2 watts/foot)

CCT: 3500K

ITL LM79 Report 85158

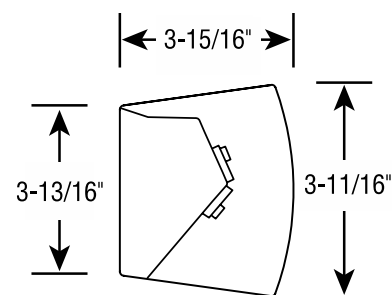

Total Light Output, 3500K, 80 CRI (Lumens)			
S*	B*	H*	V**
1319	1658	2506	3222

Linear Light Output, 3500K, 80 CRI (Lumens/Foot)			
S*	B*	H*	V**
330	415	627	806

Power, 3500K, 80 CRI (Watts/Foot)			
S*	B*	H*	V**
3.6	4.6	7.0	9.2

Efficacy, 3500K, 80 CRI (Lumens/Watt)			
S*	B*	H*	V**
92	90	90	88

S – Standard Output, B – Boosted Standard Output, H – High Output, V – Very High Output

* Family Correlation based on 4' luminaire 3500K Very High Output (V) test – 120V

** Correlation based on ITL report: 85158

Notes

- For Tunable White data please see Tunable White technical sheets.
- For fluorescent data please see fluorescent technical sheets.

The Finelite Difference



10-Year performance-based warranty



10-working-day shipping on standard orders



Tailored Lighting available



Buy American Act Compliance