



Declare.

Third
Party
Verified

HP-3 Collection

Sweet Spot for Your Project



FINELITE[®]
Better Lighting

Finelite, Inc. • 30500 Whipple Road • Union City • CA 94587-1530 • P: 510-441-1100 • www.finelite.com © 2024 FINELITE, INC. ALL RIGHTS RESERVED.
Due to continuing product improvements, Finelite reserves the right to change specifications without notice. Please visit www.finelite.com for the most current data.

A brand of **legrand**[®]

HP-3 Collection

Designed with an advanced optical system and utilizing mid-power LEDs, the HP-3 delivers exceptional performance that surpasses industry standards. Its Widespread and Asymmetric Optic options create a balanced blend of ambient and task lighting, ensuring a comfortable and productive environment tailored to your design needs. Choose from 179 RAL color options for your project.

Declare 2.0

This product is enrolled in the International Living Future Institute (ILFI) Declare 2.0 Program and is third-party verified.



Features

Tailored Output

Optimizing lighting levels to
accommodate architectural design
elements and code requirements.

- Standard (**S**)
- Boosted Standard (**B**)
- High (**H**)
- Very High (**V**)

Features

Tailored Color

Adjust intensity to the preferences of the people in the space.

- Static White options at 3000K, 3500K, and 4000K CCT
- 80+ and 90+ CRI options available

Features

Tailored Lengths

Enhance architectural interiors with perfectly sized luminaires

- Minimum section length is 2' and maximum is 12'
- Tailored increments of 1/16"

Features

Tailored Control


Dim and tune the lighting to fit user preference.

- Dimming from 100% to 10%, standard; 1% available
- Industry-leading pre-qualified drivers and control options available
- Integrated or networked daylight and occupancy sensor options are available




Distribution


Indirect/Direct

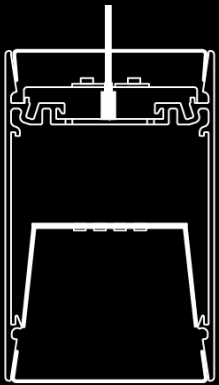


Direct

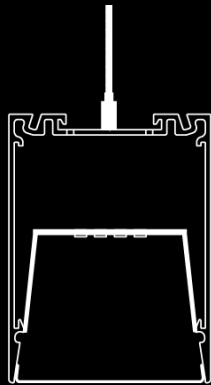


Surface Mount



Recessed

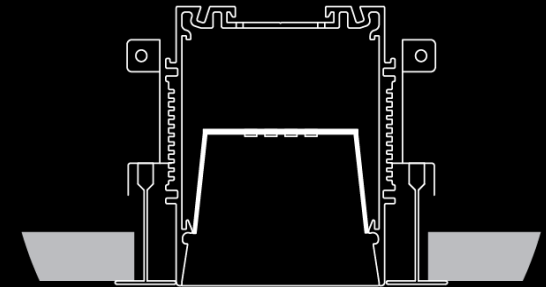

Recycled Aluminum Housing

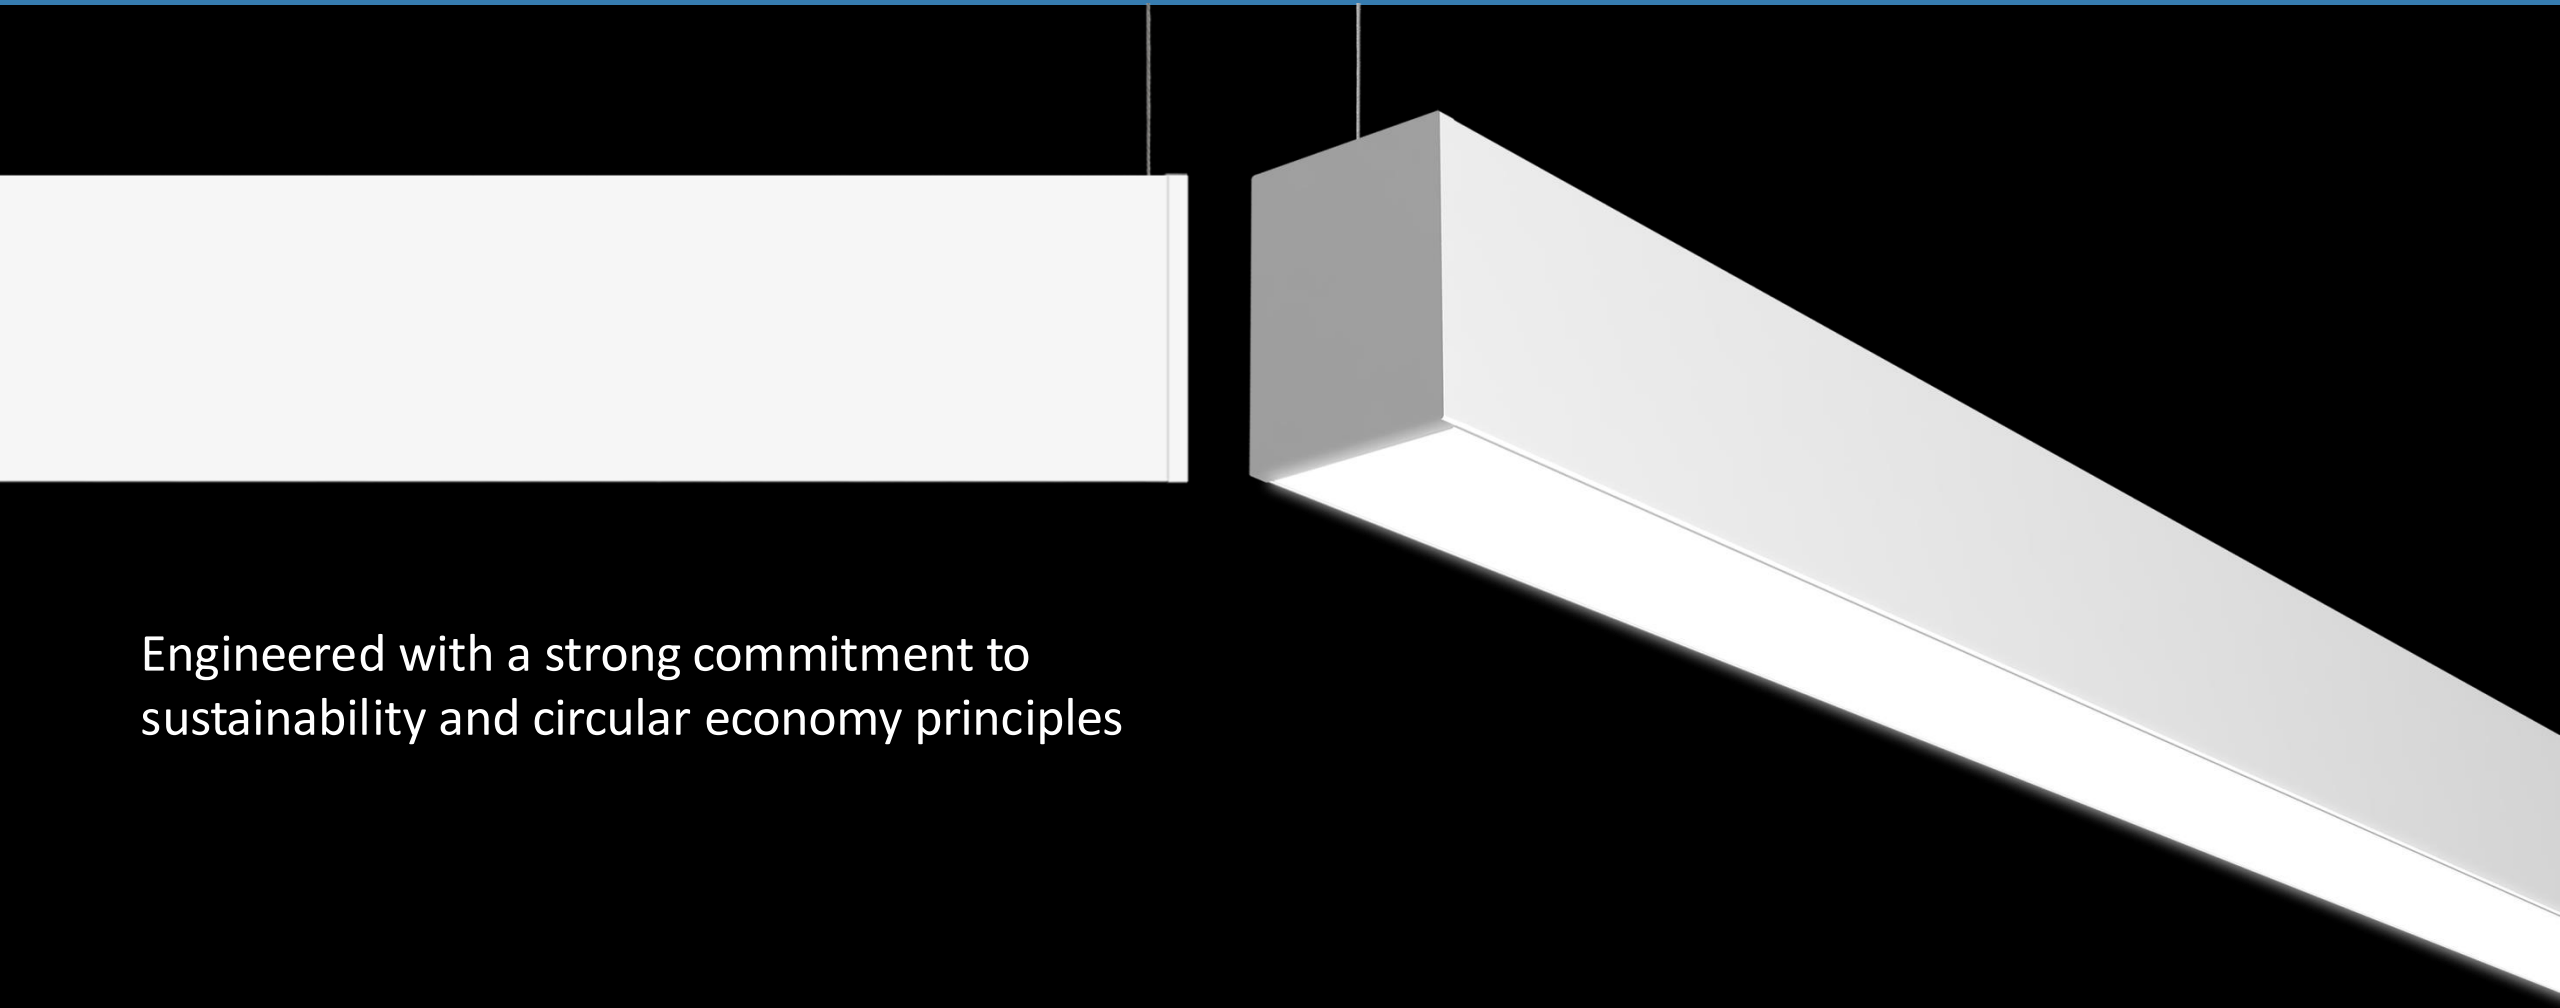

Engineered with a strong commitment to sustainability and circular economy principles

High Performance & Efficacy

Performance

Up to
9256

Lumens per 4' section

Utilizes a mid-power design to achieve L90 lifetimes exceeding 100,000 hours, delivering high-quality, glare-free illumination

Efficacy

Up to
142


Lumens per watt

Delivers 90% of its initial light output for over 100,000 hours using advanced optics and mid-power LEDs


HP-3 Optic Options

Uplight Optic


Flush

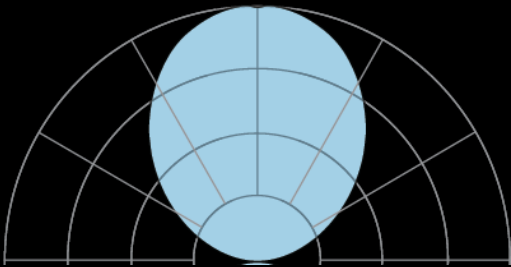

Wide Spread Optic

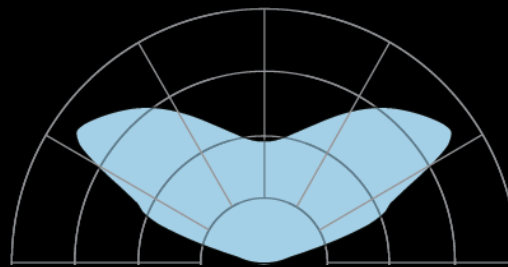


Asymmetric Optic

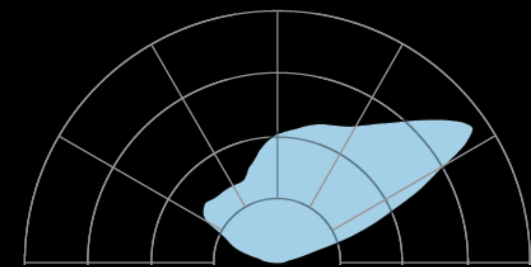


Downlight Optic


Flush

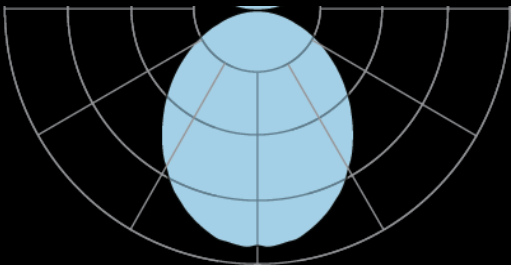

Downlight Asymmetric Optic

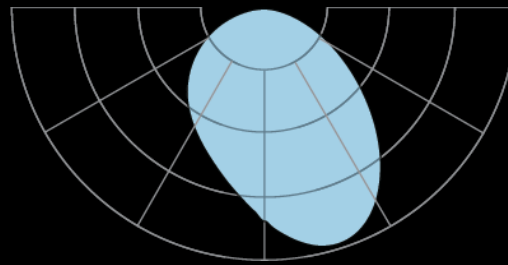

Downlight Spread Optic

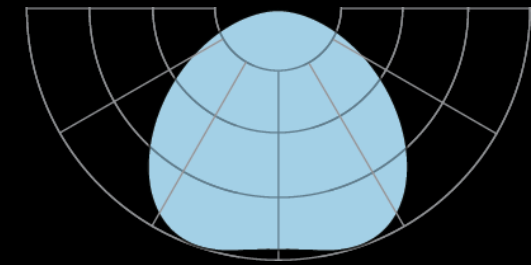


HP-3 New Joint Mechanism

This new mechanism directly results from Finelite listening to valuable contractor feedback on improving the installation process. The easy joining mechanism will minimize the time required to join fixtures allowing contractors to get off the job faster.


Align and Slide



Tighten Joiner Screws

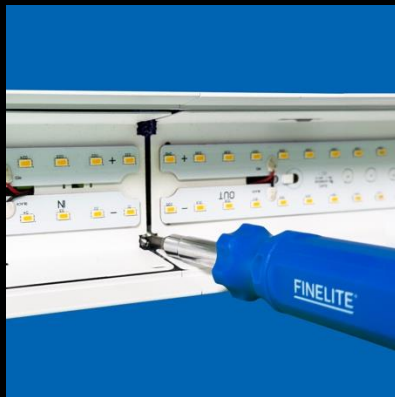

Done!

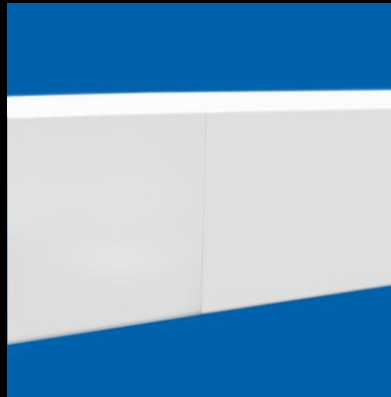

Features & Benefits:

- Easy Joining Mechanism
- Saves Time and Money
- Plug-and-Play Wiring
- Contractor-Friendly
- No loose Hardware
- Captive Screws
- No Need to Access Internal Components
- Reduced Risk of Installation Errors



Performance

HP3-P-ID-4'-V-V-835-F-F

Uplight: Flush/ Downlight: Flush

Distribution: 54% Up (V) / 46% Down (V)

Efficacy: 132 lm/W

Uplight: 4883 lumens (1221 lumens/foot)

Downlight: 4159 lumens (1040 lumens/foot)

Total luminaire output: 9042 lumens (2261 lm/ft)

68.68 watts (17.1 W/ft)



CRI: 80 / CCT: 3500K

NLTL LM79 Report # REP-112524-01

Note

– For complete photometric and Tunable White data please see technical sheet.

FINELITE[®]
Better Lighting

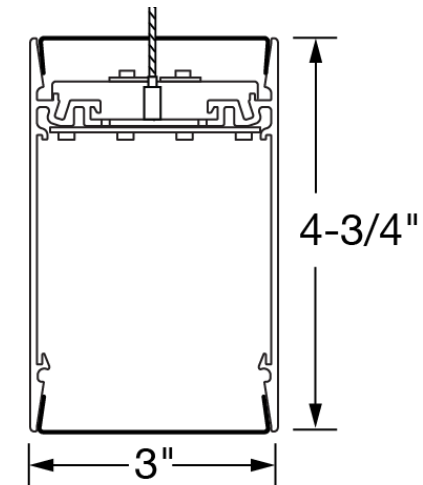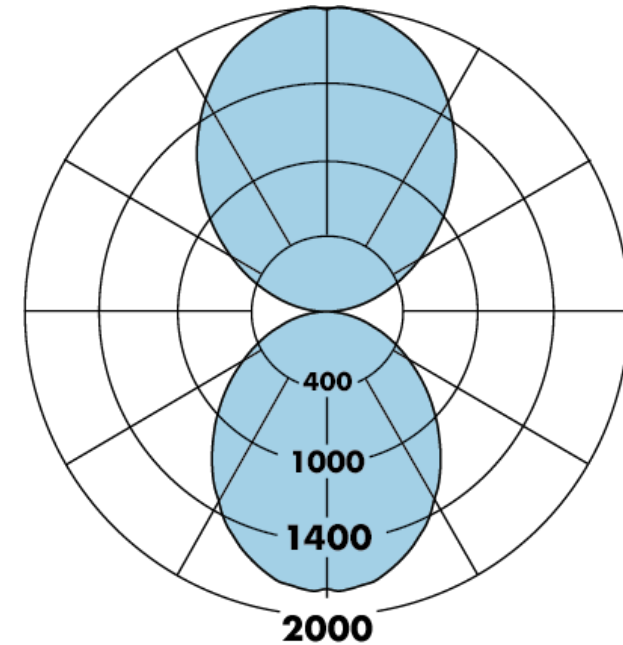

Performance

HP3-P-D-4'-V-835-F

Downlight: Flush

Efficacy: 122 lm/W

Total luminaire output: 4176 lumens (1044 lm/ft)

34.34 watts (8.6 W/ft)



CRI: 80 / CCT: 3500K

NLTL LM79 Report # LM-63-2002

Note

– For complete photometric and Tunable White data please see technical sheet.

FINELITE®
Better Lighting

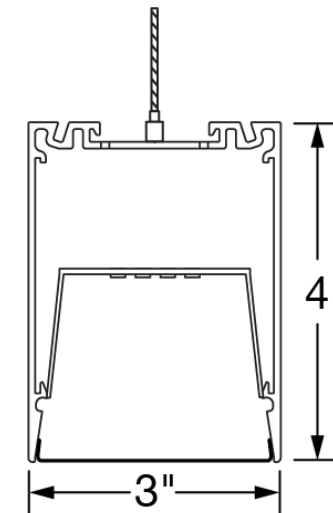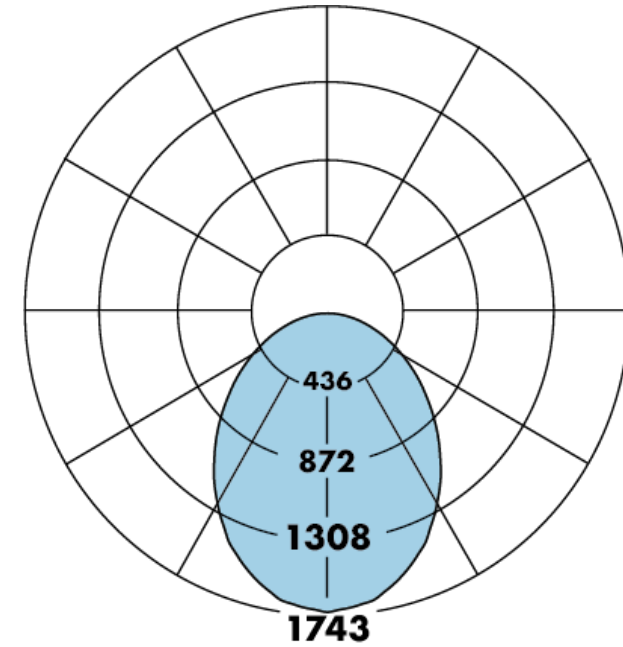

Performance

HP3-R-D-4'-V-835-F

Downlight: Flush

Efficacy: 122 lm/W

Total luminaire output: 4176 lumens (1044 lm/ft)

34.34 watts (8.6 W/ft)



CRI: 80 / CCT: 3500K

NLTL LM79 Report # LM-63-2002

Note

– For complete photometric and Tunable White data please see technical sheet.

FINELITE[®]
Better Lighting

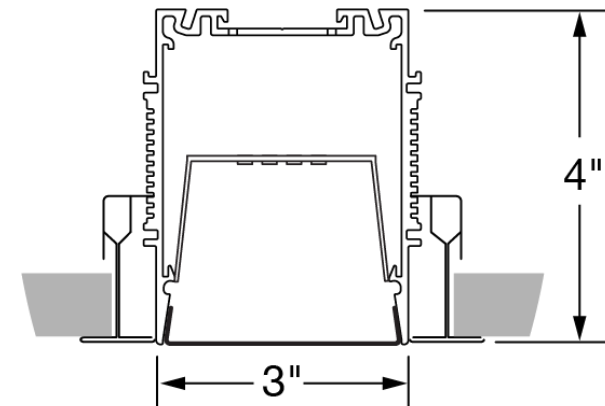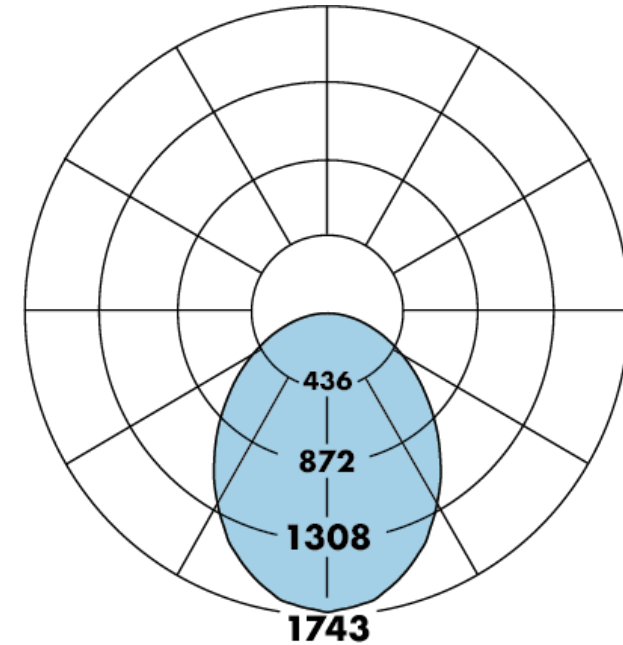

Performance

HP3-SM-D-4'-V-835-F

Downlight: Flush

Efficacy: 122 lm/W

Total luminaire output: 4176 lumens (1044 lm/ft)

34.34 watts (8.6 W/ft)



CRI: 80 / CCT: 3500K

NLTL LM79 Report # LM-63-2002

Note

– For complete photometric and Tunable White data please see technical sheet.

FINELITE[®]
Better Lighting

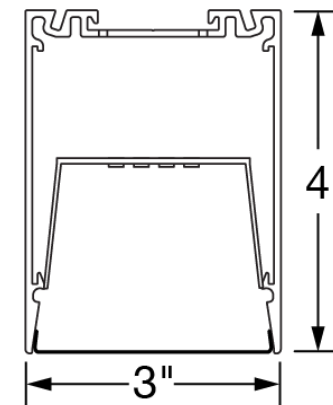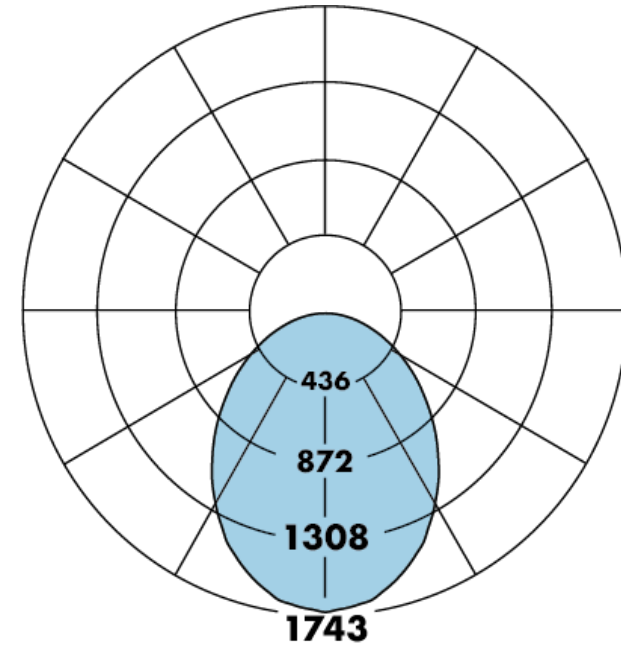



The Finelite LED Difference



10-year performance-based warranty



Ships in 10 working days for standard orders



Tailored Lighting



Buy American Act Compliance