

HP-I

Collection

Precision. Performance. Elegance.



Declare. Third Party Verified

HP-1 Collection

The HP-1 is a linear LED luminaire family engineered for exceptional performance and architectural sophistication. Designed with advanced optical technology and mid-power LEDs, HP-1 delivers superior illumination while maintaining a sleek, minimal profile. Backed by a 10-year performance-based warranty on all standard components.

High Performance and Efficacy

- Up to **6490** lumens per 4' section
- Up to **140** lumens per watt

Tailored Output


- Static White options: Standard (**S**), Boosted Standard (**B**), High (**H**), and Very High (**V**)

Tailored Color

- Static White options at 2700K, 3000K, 3500K, and 4000K CCT
- 80+ and 90+ CRI options available

Tailored Control

- Dimming from 100% to 10%, standard; 1% available
- Industry-leading pre-qualified drivers available

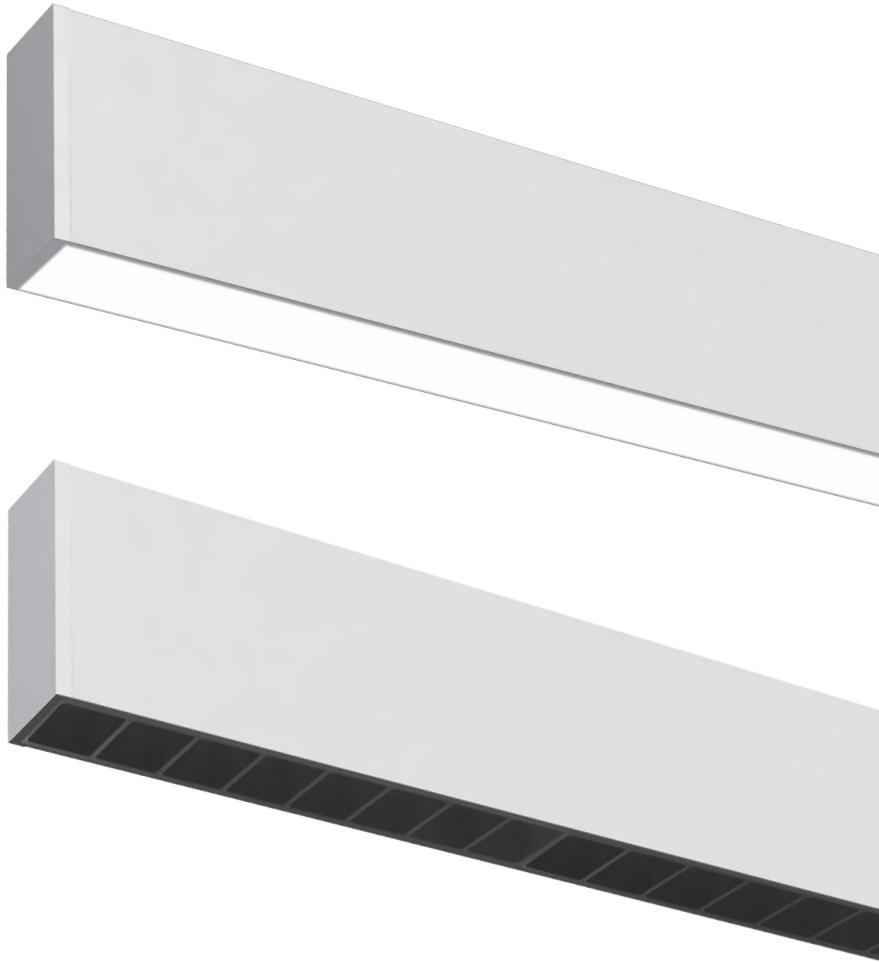


HP-1 Indirect/Direct


HP-1 ID—a sleek, affordable linear LED fixture. Its narrow aperture offers a slim modern look, while still including an integral driver for simplified installation. Micro louvers are available as an option for reduced glare for quiet and comfortable lighting.

DLWNTHT OPTIONS

Flush

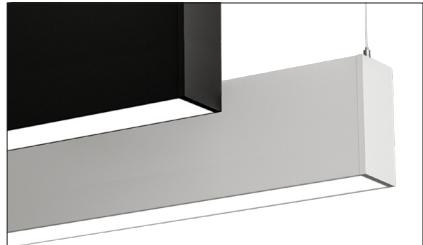


Micro Louver

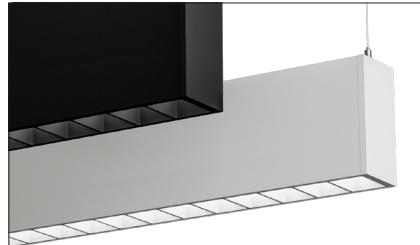

CROSS SECTIONS


Indirect/Direct

Flush Uplight Diffuser
(standard)

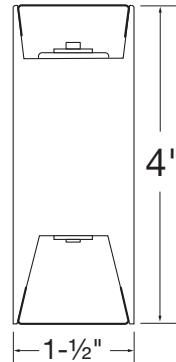

Indirect/Direct

Widespread Optic
(optional)

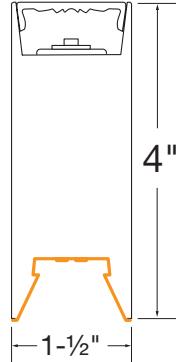

Flush Downlight Diffuser
(standard)

Micro Louver
(optional)




Finelite Black Finish Shown

HP-1 Direct


Transform any space with the HP-1 D linear LED luminaire. Designed for affordability and elegance, it features a narrow aperture for a clean, contemporary look. Micro-louvers options provide glare reduction, and the integral driver makes setup quick and hassle-free—perfect for projects big or small.

DLWNTLIGHT OPTIONS

Flush

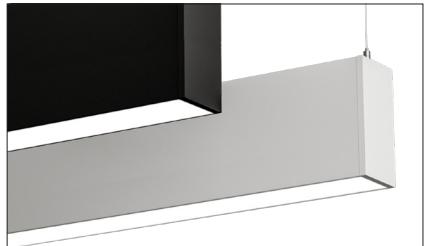


Micro Louver

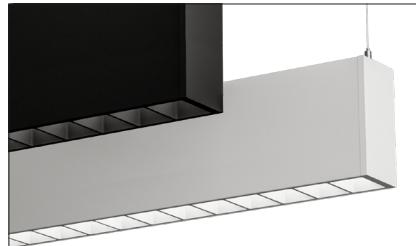

CROSS SECTIONS

Direct

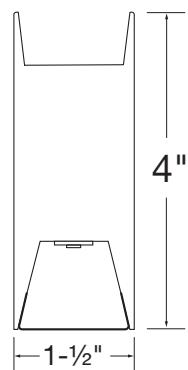


Direct



Flush Downlight Diffuser
(standard)

Micro Louver
(optional)

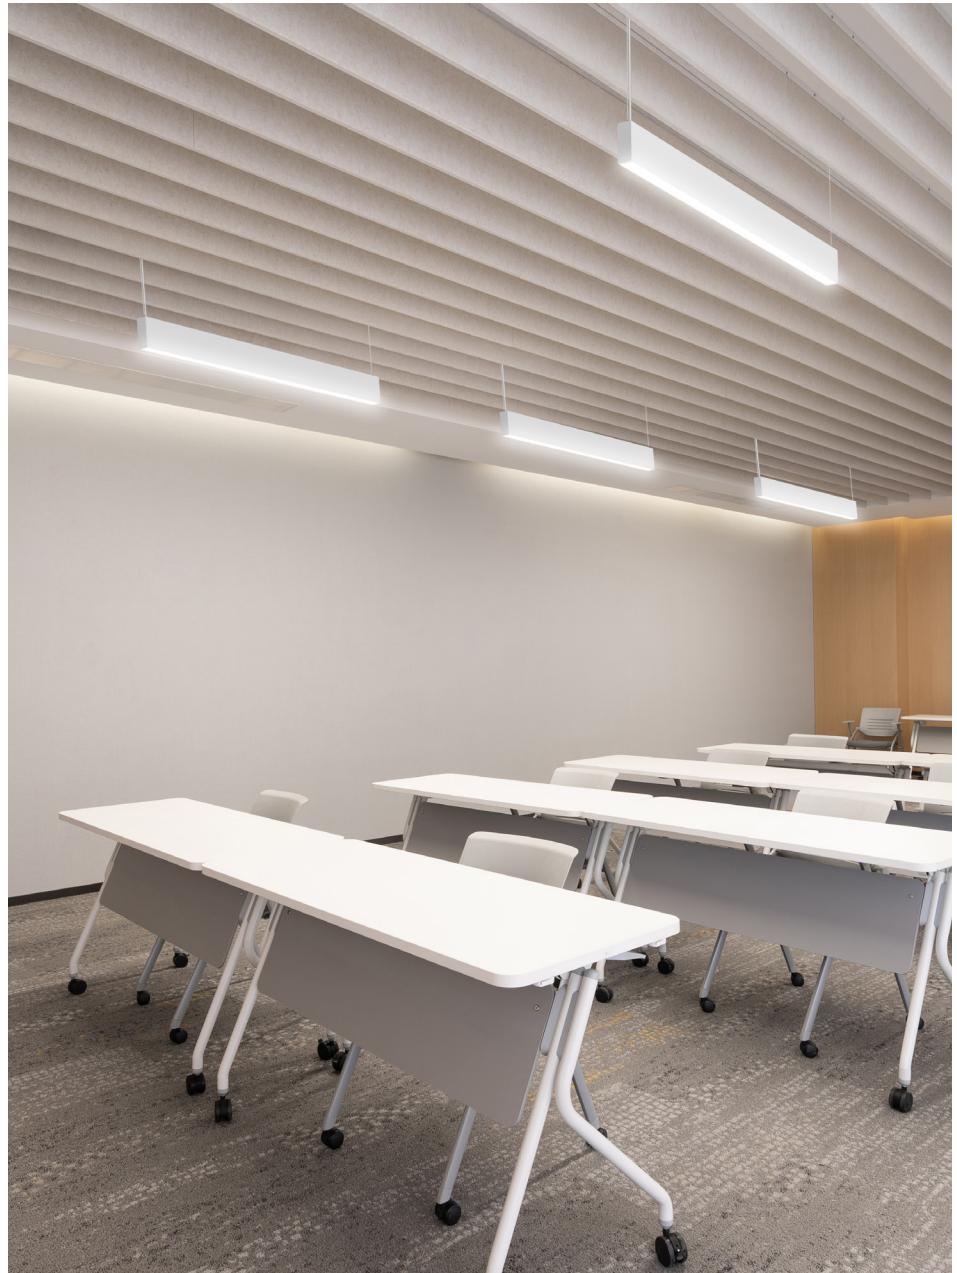

Signal White Finish Shown

Material Mimic

Material Mimic is a revolutionary wood grain finish for our popular linear lighting products. The finishes offer the aesthetic appeal of natural wood without the complexities of traditional wood, laminate, or faux wood applications. It provides a genuine wood look, distinct from the artificial appearance of laminates and the high-maintenance nature of varnish. We expand your options by offering ultra-realistic wood grain finishes across these mounting types: pendant and surface.



Gray Elm



Teak



White Oak



Walnut



Performance Data

Indirect/Direct Photometry - 4' Luminaire 3500K

HP1-P-ID-4'-V-V-835-F-F

Uplight: Flush Diffuser / **Downlight:** Flush Diffuser

Distribution: 52% Up (V) / 48% Down (V)


Efficacy: 122 lm/W

Uplight: 2782 lumens (696 lumens/foot)

Downlight: 2609 lumens (652 lumens/foot)

Total luminaire output: 5391 lumens (1348 lm/ft)
44.4 watts (11.1 W/ft)

CRI: 80 / CCT: 3500K



	↑ Indirect	↓ Direct		
	Light Output, 3500K, 80 CRI (Lumens Per Foot)			
	↑ S*	↑ B*	↑ H*	↑ V**
↓ S*	467	602	762	922
↓ B*	602	737	897	1057
↓ H*	751	887	1047	1207
↓ V*	893	1028	1188	1348

	↑ S*	↑ B*	↑ H*	↑ V**
	Efficacy, 3500K, 80 CRI (Lumens Per Watt)			
	↑ S*	↑ B*	↑ H*	↑ V**
↓ S*	113	116	120	122
↓ B*	116	118	121	123
↓ H*	118	119	121	123
↓ V*	118	119	121	122

S - Standard Output, B - Boosted Standard Output, H - High Output, V - Very High Output

* Family Correlation based on 4 ft. luminaire 3500K Very High Output (V) test - 120V

** Based on HP1-P-D-4'-V-835-F-BLX2835 & HP1-P-I-4'-V-835-F-BLX2835 reports

Note

- Please refer to the technical sheet for total light output and wattage.

HP1-P-ID-4'-V-V-835-WSO-F

Uplight: WSO / **Downlight:** Flush Diffuser

Distribution: 53% Up (H) / 47% Down (H)


Efficacy: 124 lm/W

Uplight: 2887 lumens (722 lumens/foot)

Downlight: 2609 lumens (652 lumens/foot)

Total luminaire output: 5496 lumens (1374 lm/ft)
44.4 watts (11.1 W/ft)

CRI: 80 / CCT: 3500K



	↑ Indirect	↓ Direct		
	Light Output, 3500K, 80 CRI (Lumens Per Foot)			
	↑ S*	↑ B*	↑ H*	↑ V**
↓ S*	474	618	779	949
↓ B*	609	753	914	1083
↓ H*	758	903	1064	1233
↓ V*	899	1044	1205	1374

	↑ S*	↑ B*	↑ H*	↑ V**
	Efficacy, 3500K, 80 CRI (Lumens Per Watt)			
	↑ S*	↑ B*	↑ H*	↑ V**
↓ S*	114	119	122	125
↓ B*	117	120	123	125
↓ H*	118	121	123	125
↓ V*	118	121	122	124

S - Standard Output, B - Boosted Standard Output, H - High Output, V - Very High Output

* Family Correlation based on 4 ft. luminaire 3500K Very High Output (V) test - 120V

** Based on HP1-P-D-4'-V-835-F-BLX2835 & HP1-P-I-4'-V-835-F-BLX2835 reports

Note

- Please refer to the technical sheet for total light output and wattage.

Performance Data

Direct Photometry - 4' Luminaire 3500K


HP1-P-D-4'-V-835-F

Downlight: Flush Diffuser

Efficacy: 118 lm/W

Total luminaire output: 2609 lumens (652 lm/ft)
22.1 watts (5.5 W/ft)

CRI: 80 / CCT: 3500K



Total Light Output, 3500K, 80 CRI (Lumens) - 4' Luminaire

S ¹	B ¹	H ¹	V ²
908	1446	2044	2609

Light Output, 3500K, 80 CRI (Lumens Per Foot)

S ¹	B ¹	H ¹	V ²
227	362	511	652

Power, 3500K (Watts Per Foot)

S ¹	B ¹	H ¹	V ²
2.1	3.1	4.3	5.5

Efficacy, 3500K, 80 CRI (Lumens Per Watt)

S ¹	B ¹	H ¹	V ²
110	116	118	118

S - Standard Output, **B** - Boosted Standard Output, **H** - High Output, **V** - Very High Output

* Family Correlation based on 4 ft. luminaire 3500K Very High Output (V) test - 120V

** Based on HP1-P-D-4'-V-835-F-BLX2835 reports

Note

- Please refer to the technical sheet for total light output and wattage.


HP1-P-D-4'-V-835-MLW

Downlight: White Micro Louver

Efficacy: 130 lm/W

Total luminaire output: 3603 lumens (901 lm/ft)
27.6 watts (6.9 W/ft)

CRI: 80 / CCT: 3500K



Total Light Output, 3500K, 80 CRI (Lumens) - 4' Luminaire

S ¹	B ¹	H ¹	V ²
1189	2020	2798	3603

Light Output, 3500K, 80 CRI (Lumens Per Foot)

S ¹	B ¹	H ¹	V ²
297	505	700	901

Power, 3500K (Watts Per Foot)

S ¹	B ¹	H ¹	V ²
2.1	3.6	5.2	6.9

Efficacy, 3500K, 80 CRI (Lumens Per Watt)

S ¹	B ¹	H ¹	V ²
139	140	134	130

S - Standard Output, **B** - Boosted Standard Output, **H** - High Output, **V** - Very High Output

* Family Correlation based on 4 ft. luminaire 3500K Very High Output (V) test - 120V

** Based on HP1-P-D-4'-V-835-MLW-BLX2835 reports

Note

- Please refer to the technical sheet for total light output and wattage.

FINELITE®

Better Lighting



Ships in 10 working days
for standard orders



10-year performance-
based warranty



Tailored Lighting



Buy American Act
Compliance