

Light Measurement Report

Print date: 1/7/2026

Measurement date and time: 1/2/2026 2:19:14 PM – Measurement no. VFR-260102-0735-MS

Measurement tracking No. and Link: [n/a](#)

Operator:



Laboratory and Equipment

Laboratory Owner and Location

Goniospectrometer System and Type

Sensor Name, Calibr. Date and Serial No.

Spectrometer Manufacturer and Model

Viso Systems, Copenhagen V, Denmark

LabSpion – Type C, horizontal

LabSensor Model2 – 4/8/2025 – 1516006613

Ibsen Photonics, Denmark – Freedom VIS (Custom Viso)

Measurement Conditions

Number of C-planes and Resolution

γ (gamma)-Resolution

Test Distance

Input Power, Power and Displ. Factors

Input RMS Voltage and Current

Frequency of Input Power

Warm-up Time and Variation

12 planes – 30°

5°

10.57 m

14.4 W – PF 0.99 – DPF 0.99

121 V – 0.120 A

60 Hz

Not completed – 2.0%

Tested Light Source

Product Name

Item No. and Manufacturer

Product Description (line 1)

HP1-P-D-4'-B-835-MLB-BLX2835

HP1-P-D-4'-B-835-MLB-BLX2835 –

Main Light Measurement Results

Output – Total Lumen (Up% / Down%)

Efficiency

Peak Intensity and Beam Angle

Correlated Color Temperature, Target/Measured

Color Rendering Index

Color Rendering TM30-18

Color Shift, CIE duv and MacAdam Steps

Flicker

1838 lm – 0.89% / 99.11%

128 lm/W

2225 cd – 56.6°



CCT = 3465 K / 3465 K

CRI 81.7

R_f 82.8 – R_g 97.0

Duv 0.0016 – SDCM n/a

SVM n/a – PstLM n/a

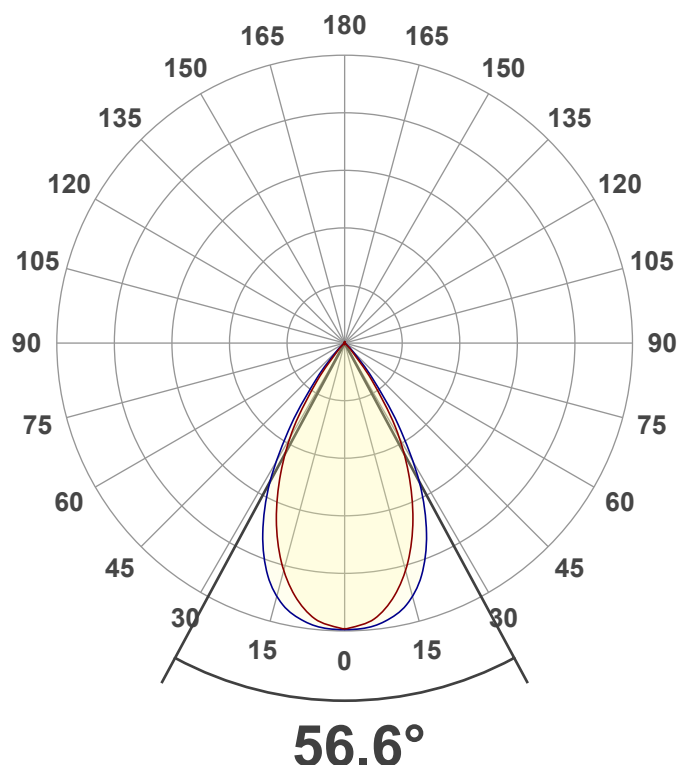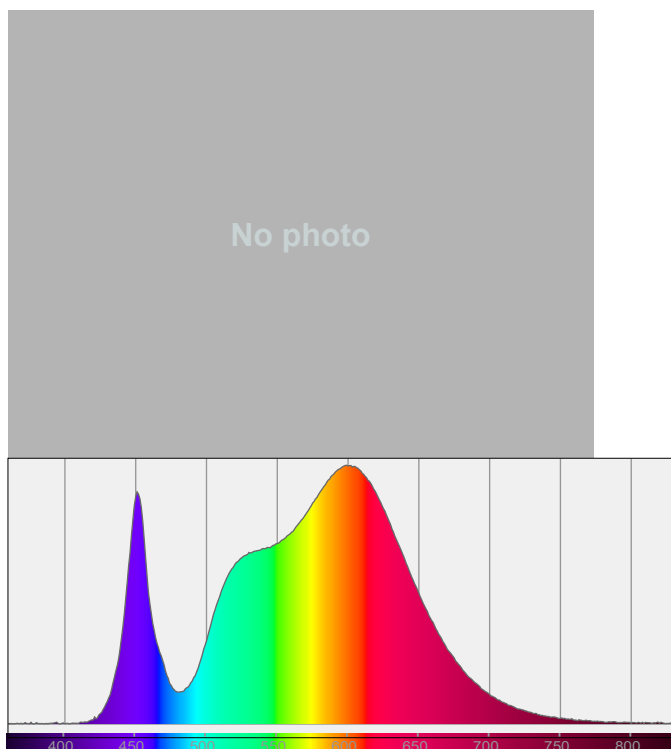

Light Measurement Report

Print date: 1/7/2026

Measurement date and time: 1/2/2026 2:19:14 PM – Measurement no. VFR-260102-0735-MS


Measurement tracking No. and Link: [n/a](#)

Operator:



Luminous Intensity diagram

Unit: 0-100% of peak intensity

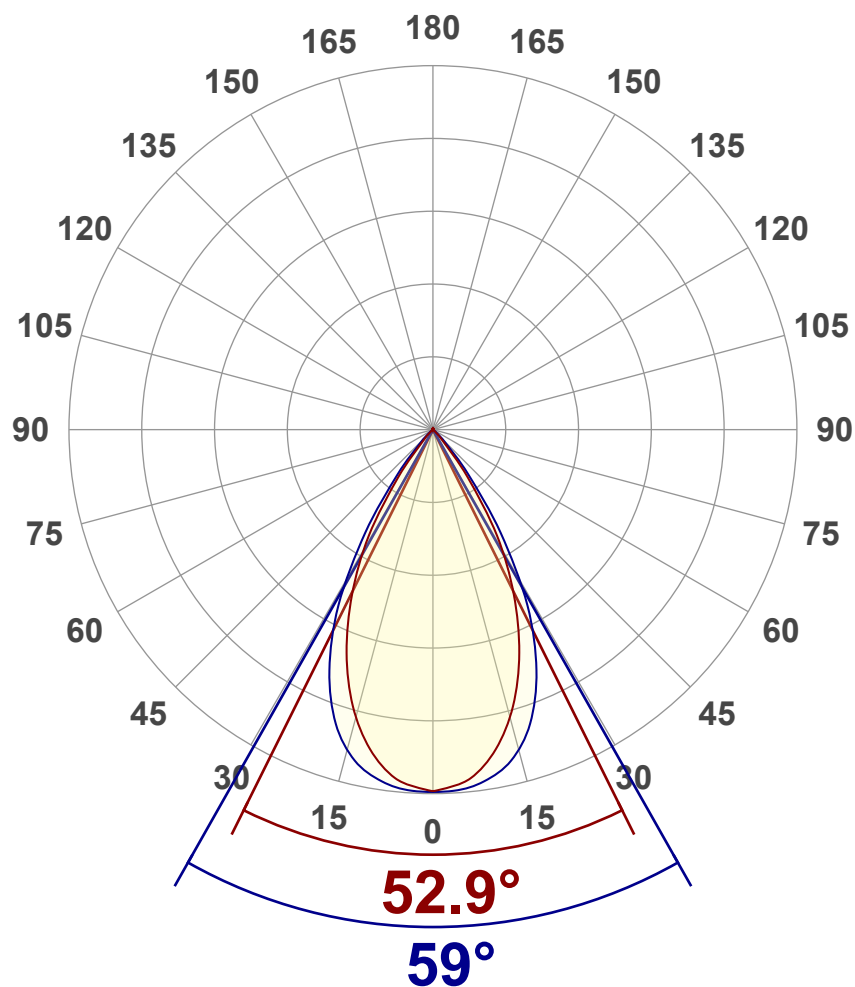

Main Values

Output (total Lumen)	1838 lm
Lumen Up% / Down%	0.89% / 99.11%
Peak Intensity	2225 cd
Beam Angle (50%)	56.6°
Beam Angle (90%)	59°
Beam Angle (10%)	52.9°

Cut-off Angle

Average 2,5%	93.5°
--------------	-------

Field Angle

Average 10%	82.1°
-------------	-------


Intensity Ratio

In 120° cone	98.8%
In 90° cone	97.1%

C000-C180

C090-C270

Linear distribution diagram - Intensity (candela) vs γ-angle

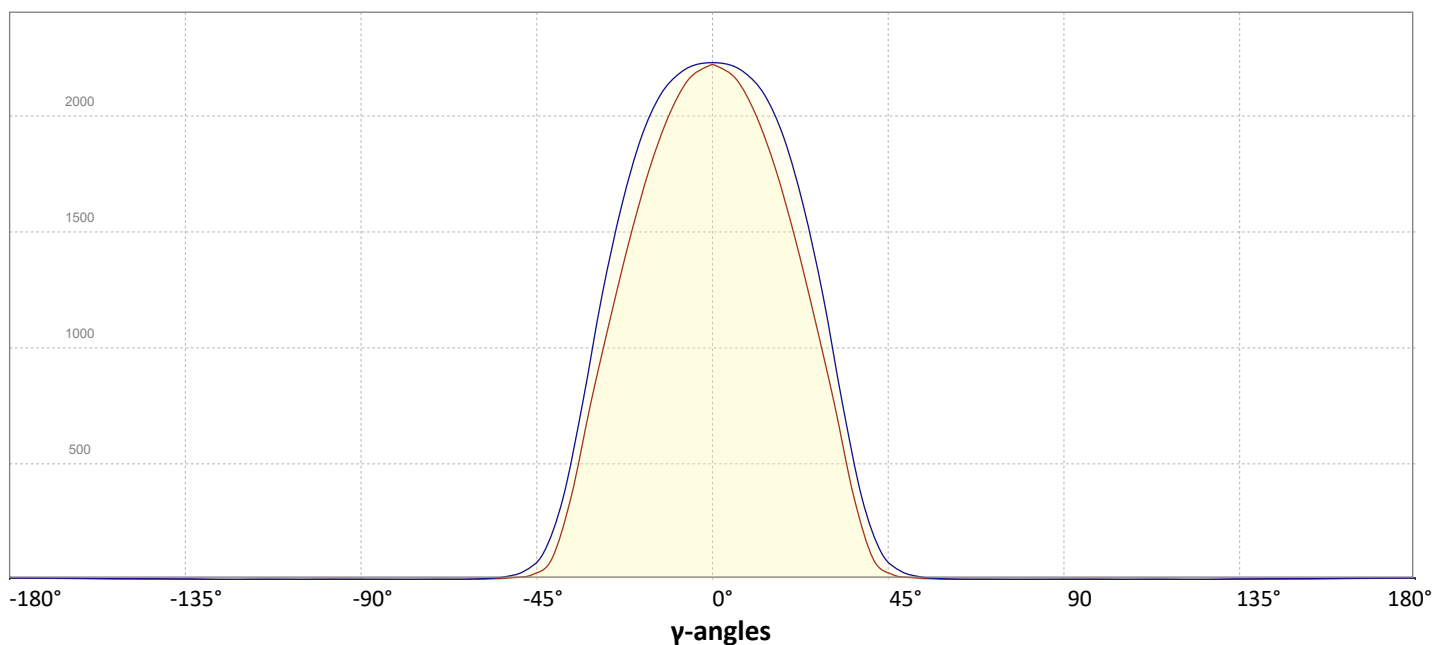


Light Measurement Report


Print date: 1/7/2026
Measurement date and time: 1/2/2026 2:19:14 PM – Measurement no. VFR-260102-0735-MS
Measurement tracking No. and Link: [n/a](#)
Operator:



Iso-intensity Diagram (Iso-candela)

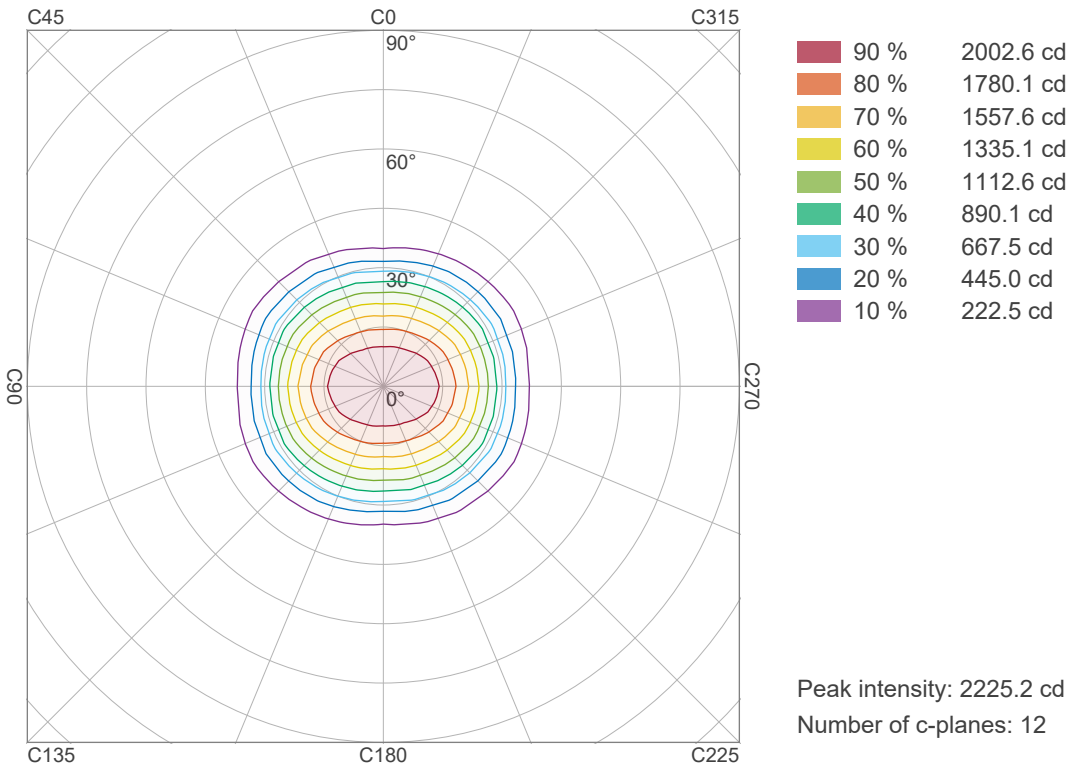

Iso-illuminance Diagram (Iso-lux)

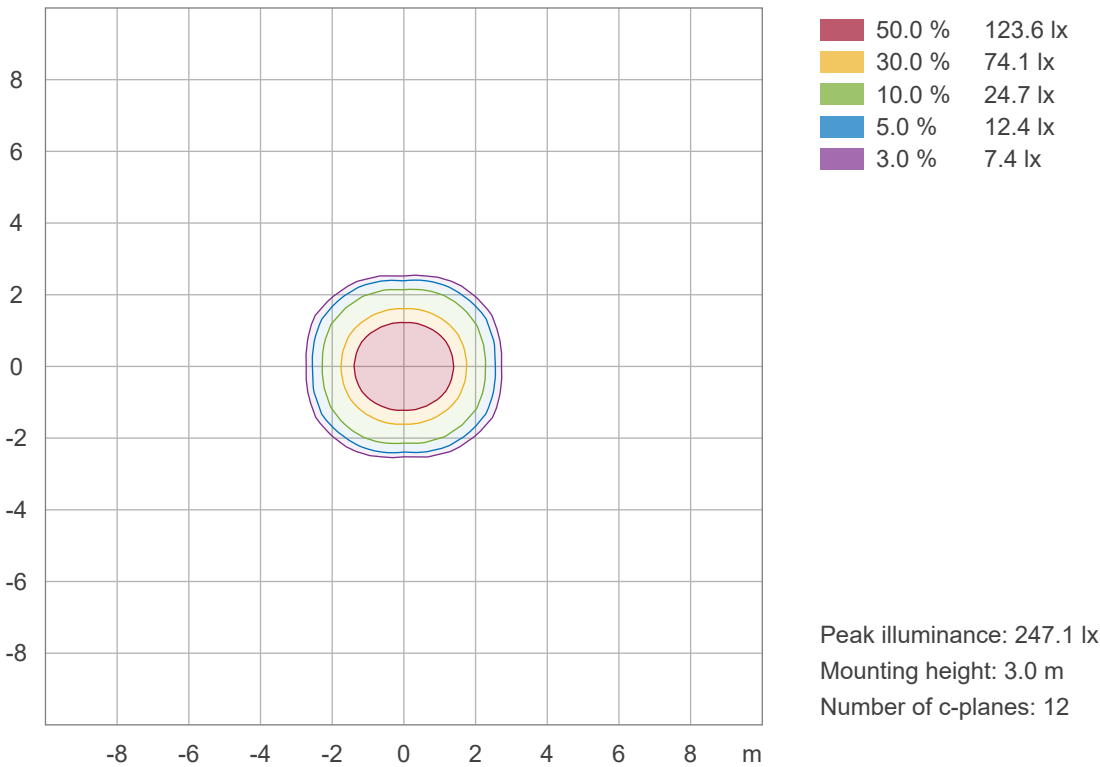

Light Measurement Report

Print date: 1/7/2026

Measurement date and time: 1/2/2026 2:19:14 PM – Measurement no. VFR-260102-0735-MS

Measurement tracking No. and Link: [n/a](#)

Operator:




Color details


Correlated Color Temperature, Target CCT = 3465 K
Correlated Color Temperature, Measured CCT = 3465 K
Color Rendering Index CRI 81.7
Color Rendering Index, R9 (red component) R9 = 2.4
Color Rendering TM30-18 R_f 82.8 – R_g 97.0
Color Quality Scale CQS = 81.6

MacAdam Steps
Color coordinates CIE 1931 (x;y) = (0.409;0.396)
Color coordinate CIEs 1960 (u;v) = (0.236;0.343)
Color deviation from BBL Duv = 0.0016
Color coordinate CIEs 1976 (CIELUV) (u';v') = (0.236;0.514)


CIE 1931

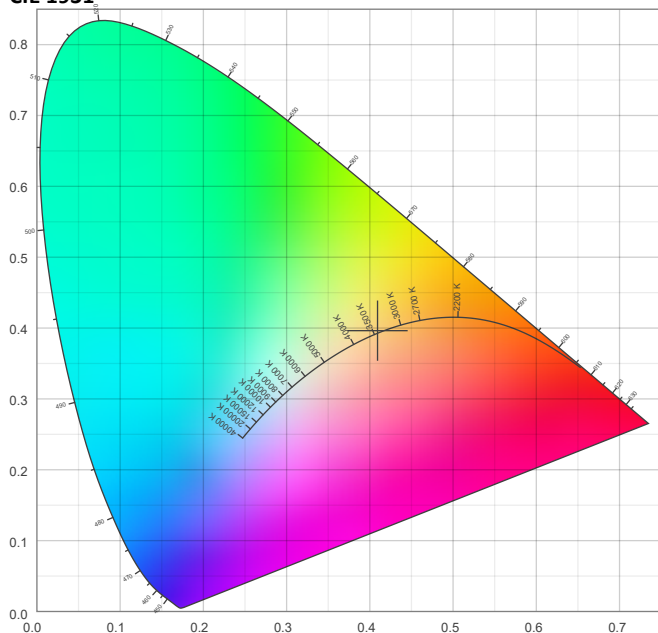

CIE 1931 – zoomed on Planckian locus

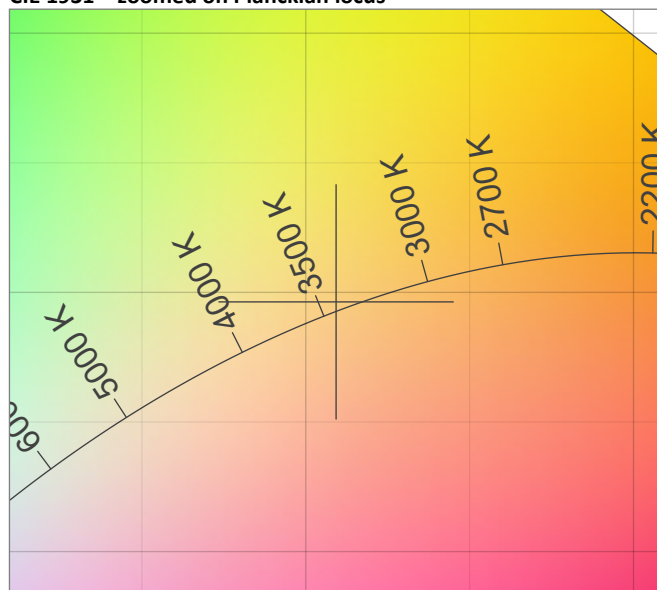


Color Rendering Index per reference color (CIE 1995)

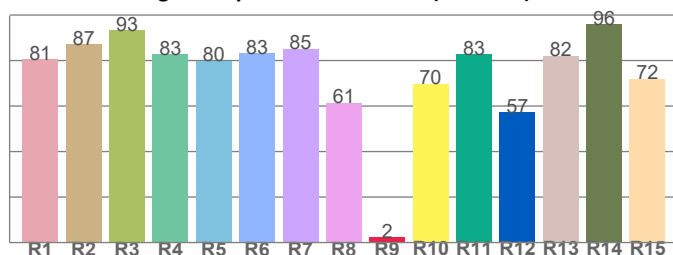


CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
80.6	87.1	93.2	82.7	79.9	83.3	85.2	61.4	2.4	69.9	82.8	57.3	82.1	96.0	71.9

Spectral power distribution (SPD) / W/nm – 0-100%

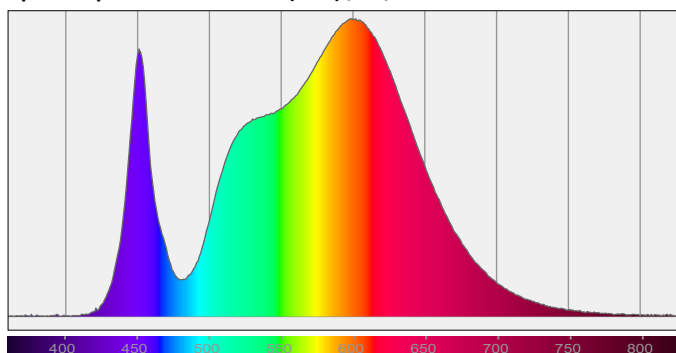


TM30-18 R_f-values per hue bin

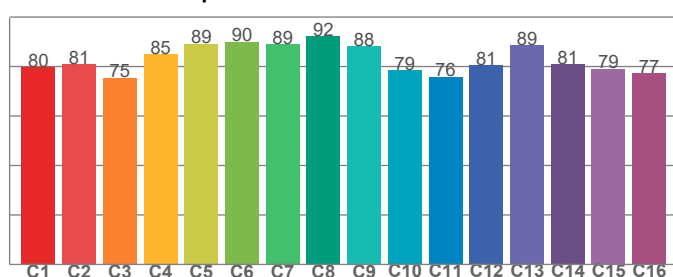

TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
79.7	81.0	75.4	85.0	89.2	90.0	89.0	92.2	88.3	78.5	75.8	80.6	88.5	81.0	79.2	77.2

Color Quality Scale by reference color

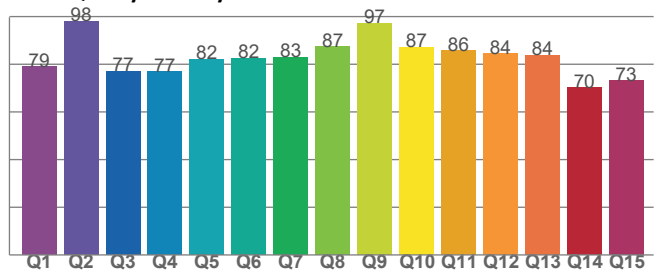

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
78.9	98.1	77.1	76.8	82.1	82.4	82.9	87.4	97.2	87.0	85.7	84.5	83.9	70.1	73.2

Light Measurement Report

Print date: 1/7/2026


Measurement date and time: 1/2/2026 2:19:14 PM – Measurement no. VFR-260102-0735-MS

Measurement tracking No. and Link: [n/a](#)

Operator:



Beam Details

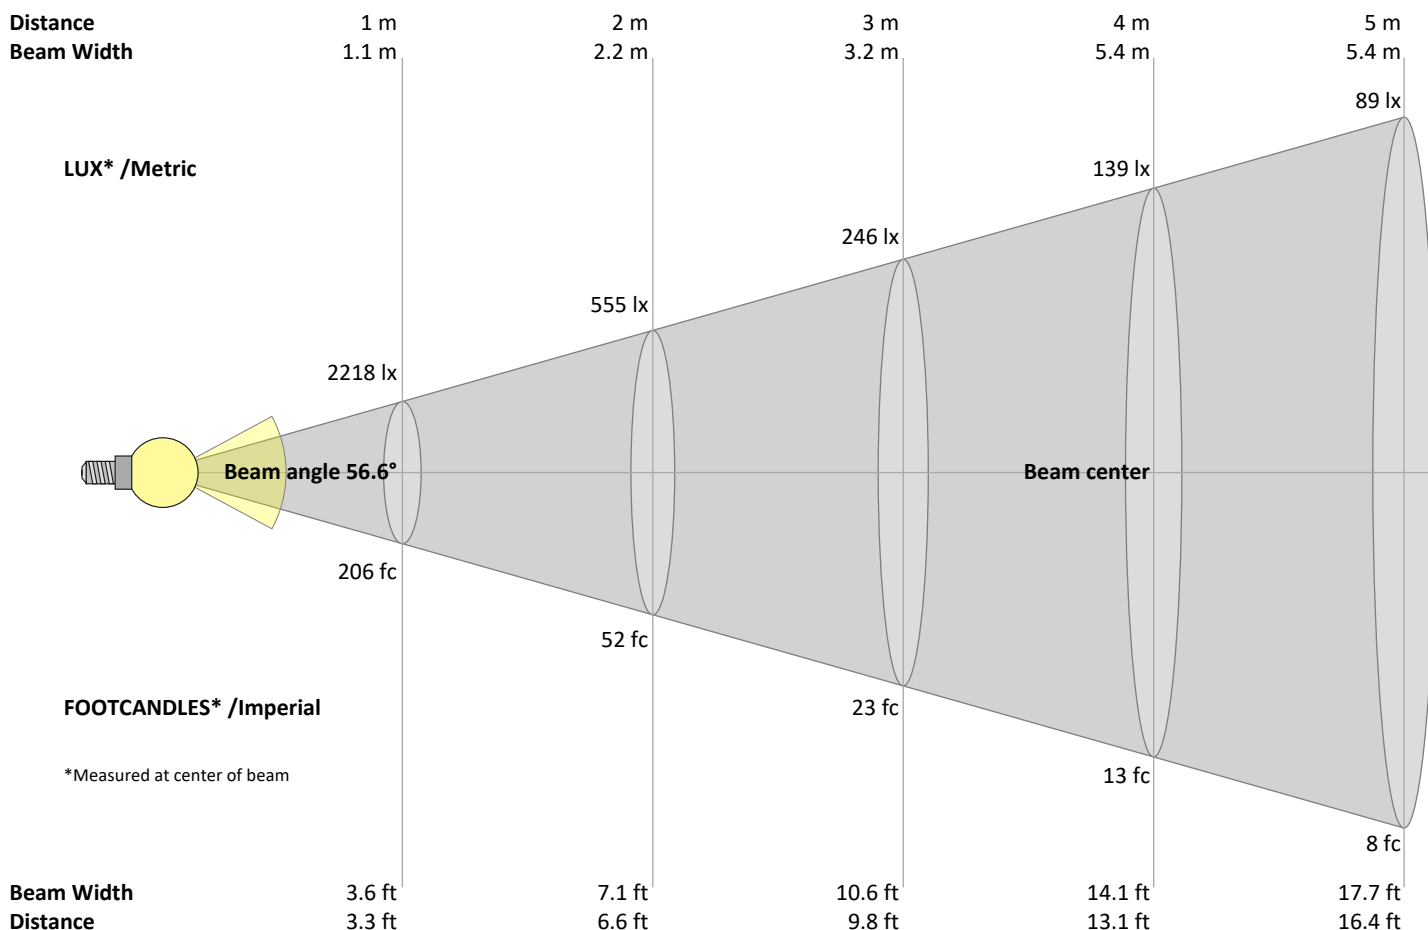

Beam intensities from 1 – 20 m

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	m
3.3	6.6	9.8	13.1	16.4	19.7	23	26.2	29.5	32.8	36.1	39.4	42.7	45.9	49.2	52.5	55.8	59.1	62.3	65.6	ft
2218	555	246	139	89	62	45	35	27	22	18	15	13	11	10	9	8	7	6	6	lux
206.1	51.5	22.9	12.9	8.2	5.7	4.2	3.2	2.5	2.1	1.7	1.4	1.2	1.1	0.9	0.8	0.7	0.6	0.6	0.5	fc

Intensities in 0° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°	γ
2218	2205	2182	2159	2100	2038	1963	1871	1778	1660	1541	1414	1276	1139	993	847	694	533	372	260	cd
100%	99%	98%	97%	95%	92%	89%	84%	80%	75%	69%	64%	58%	51%	45%	38%	31%	24%	17%	12%	of 0°val

Intensities in 90° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°	γ
2218	2225	2220	2204	2188	2154	2116	2065	1991	1916	1804	1687	1556	1402	1248	1066	879	701	538	375	cd
100%	100%	100%	99%	99%	97%	95%	93%	90%	86%	81%	76%	70%	63%	56%	48%	40%	32%	24%	17%	of 0°val

Intensities in 180° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°	γ
2218	2205	2182	2159	2100	2038	1963	1871	1778	1660	1541	1414	1276	1139	993	847	694	533	372	260	cd
100%	99%	98%	97%	95%	92%	89%	84%	80%	75%	69%	64%	58%	51%	45%	38%	31%	24%	17%	12%	of 0°val

Intensities in 270° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°	γ
2218	2225	2220	2204	2188	2154	2116	2065	1991	1916	1804	1687	1556	1402	1248	1066	879	701	538	375	cd
100%	100%	100%	99%	99%	97%	95%	93%	90%	86%	81%	76%	70%	63%	56%	48%	40%	32%	24%	17%	of 0°val

Light Measurement Report


Print date: 1/7/2026
Measurement date and time: 1/2/2026 2:19:14 PM – Measurement no. VFR-260102-0735-MS
Measurement tracking No. and Link: [n/a](#)
Operator:



Luminaire budgetary diagram

Uncorrected, comprehensive UGR table according to 117-1995

LAMPS (number of lamps)

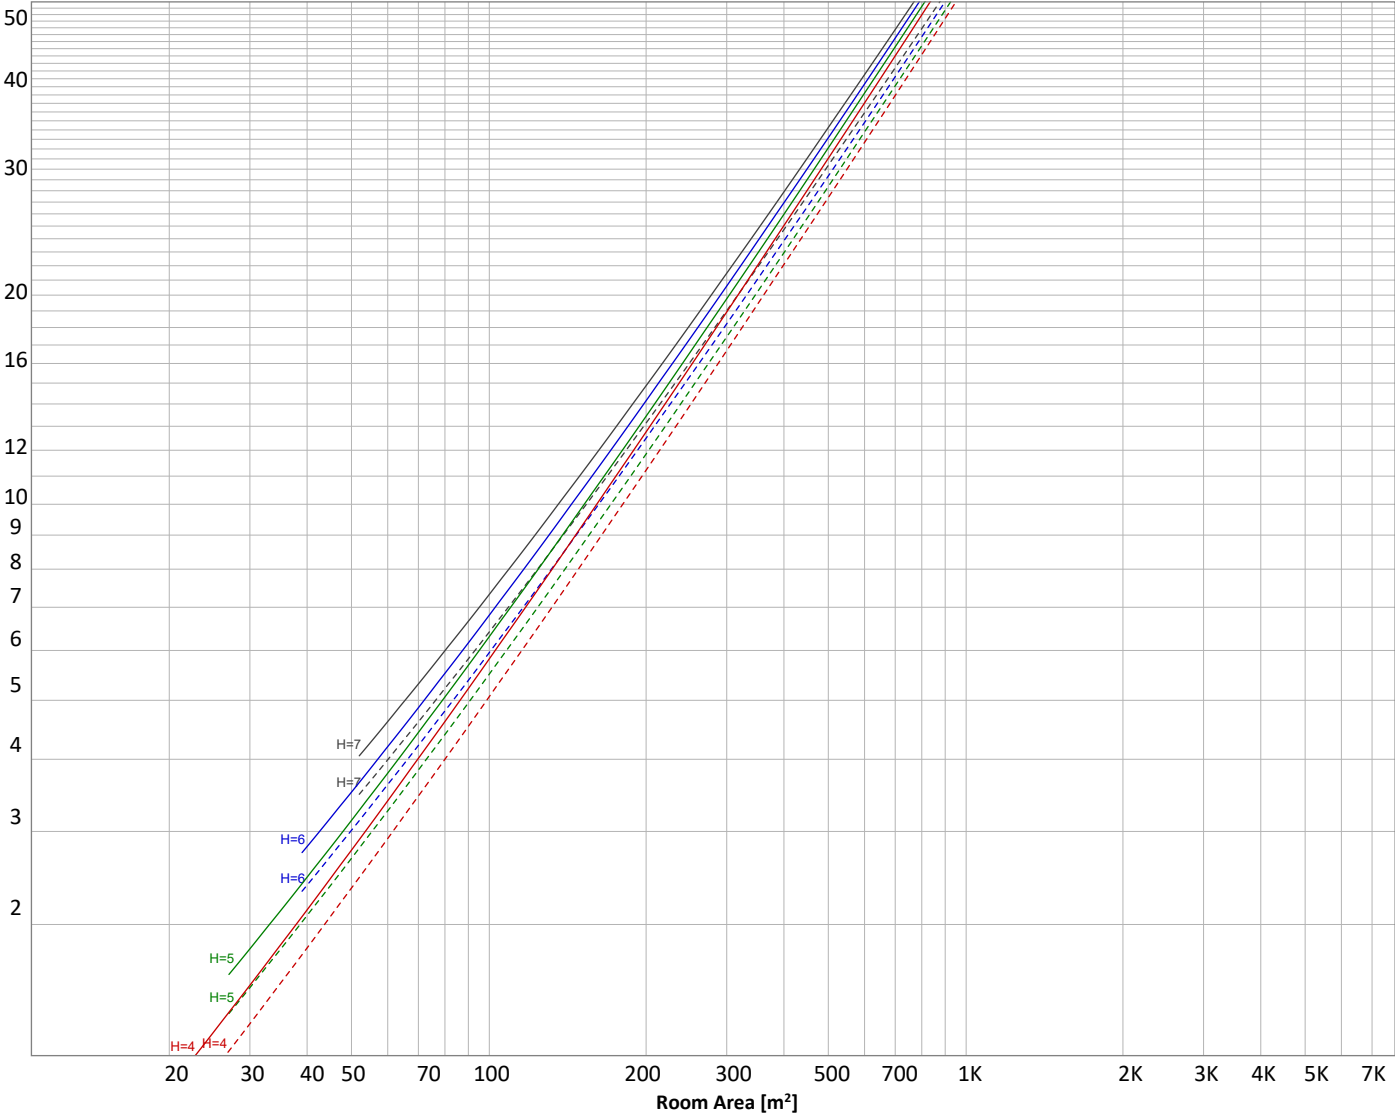

Conditions

H = Room height	Flux = 1838 lm	p(%)		
H _{down} = Lamp distance from ceiling =	0.00 m	Line type	Ceiling reflectance	Wall reflectance
H _{work} = Work area height from floor =	0.00 m	-----	70	50
E _{work} = Average lux on work area =	100 lx	-----	50	30
				Floor reflectance
				20

Zonal Lumen Summary

0°-10°	10°-20°	20°-30°	30°-40°	40°-50°	50°-60°	60°-70°	70°-80°	80°-90°
207 lm	537 lm	615 lm	369 lm	78.4 lm	10.2 lm	2.38 lm	2.00 lm	2.04 lm
90°-100°	100°-110°	110°-120°	120°-130°	130°-140°	140°-150°	150°-160°	160°-170°	170°-180°
2.15 lm	1.88 lm	1.93 lm	1.64 lm	2.02 lm	2.28 lm	2.14 lm	1.63 lm	0.629 lm

Light Measurement Report

Print date: 1/7/2026

Measurement date and time: 1/2/2026 2:19:14 PM – Measurement no. VFR-260102-0735-MS

Measurement tracking No. and Link: [n/a](#)

Operator:



Outdoor Light Planning

Lumen per Zone

Zone (γ)	Lumen	% Total
0-10°	207 lm	11.2%
10-20°	537 lm	29.2%
20-30°	615 lm	33.4%
30-40°	369 lm	20.1%
40-50°	78 lm	4.3%
50-60°	10 lm	0.6%
60-70°	2 lm	0.1%
70-80°	2 lm	0.1%
80-90°	2 lm	0.1%
90-100°	2 lm	0.1%
100-110°	2 lm	0.1%
110-120°	2 lm	0.1%
120-130°	2 lm	0.1%
130-140°	2 lm	0.1%
140-150°	2 lm	0.1%
150-160°	2 lm	0.1%
160-170°	2 lm	0.1%
170-180°	1 lm	0.0%
Total	1838 lm	100.0%

Intensity peaks

Max intensity	2225 cd
Intensity, 90°	2 cd
Intensity, 0°	2218 cd

Zonal Lumen summary

Zone (γ)	Lumen	% Total
0-30°	1358 lm	73.9%
0-40°	1727 lm	93.9%
0-60°	1815 lm	98.8%
60-90°	6 lm	0.3%
70-100°	6 lm	0.3%
90-120°	6 lm	0.3%
0-90°	1822 lm	99.1%
90-180°	16 lm	0.9%
0-180°	1838 lm	100.0%

BUG rating

	Lumen	% Total
Forward light		
Low(0-30°)	676 lm	36.8%
Medium(30-60°)	231 lm	12.6%
High(60-80°)	2 lm	0.1%
Very high(80-90°)	1 lm	0.1%
Back light		
Low(0-30°)	676 lm	36.8%
Medium(30-60°)	231 lm	12.6%
High(60-80°)	2 lm	0.1%
Very high(80-90°)	1 lm	0.1%


Uplight

Low(90-100°)	2 lm	0.1%
High(100-180°)	14 lm	0.8%

IESNA TM-15-07

Luminaire Classification System For Outdoor Luminaires

BUG rating B2 U2 G0

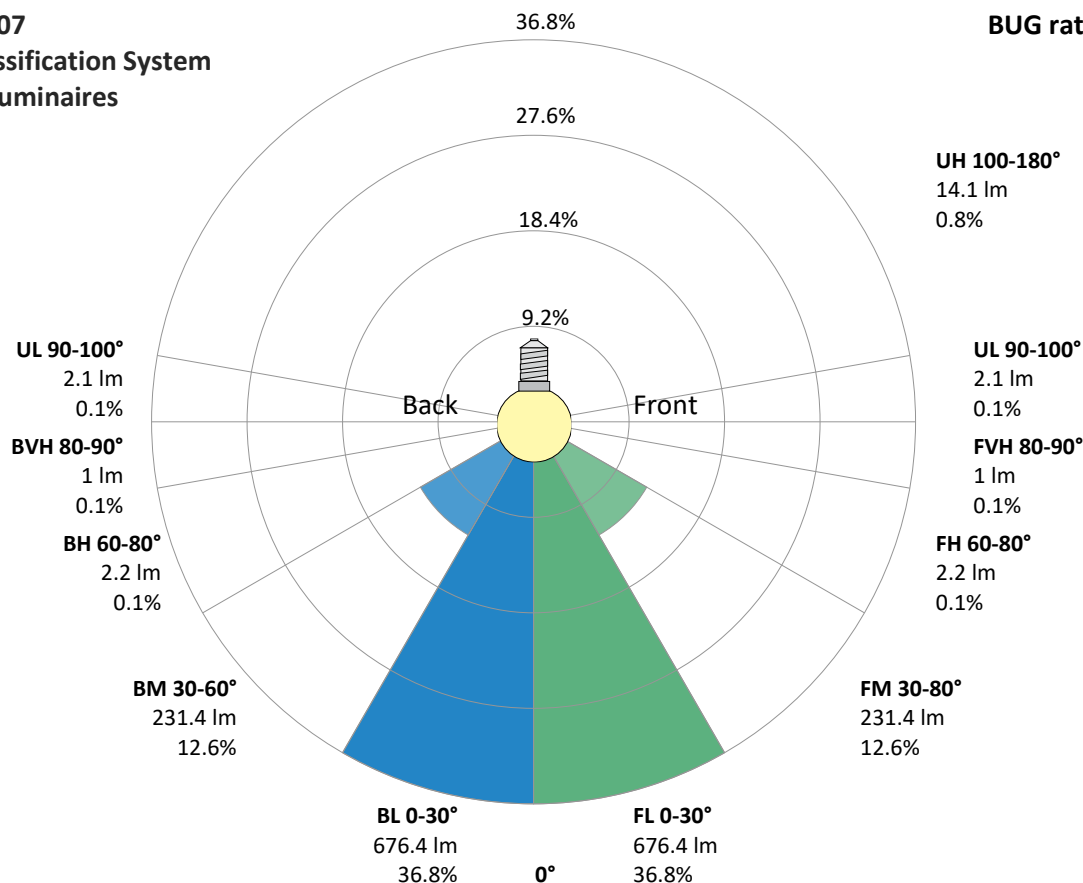

Light Measurement Report

Print date: 1/7/2026
Measurement date and time: 1/2/2026 2:19:14 PM – Measurement no. VFR-260102-0735-MS
Measurement tracking No. and Link: [n/a](#)
Operator:




Power Details


Input Power

Power feed to light source	14.4 W
Frequency of input power	60 Hz
RMS Input voltage feed, V_{RMS}	121 V
RMS Input current feed, I_{RMS}	0.120 A
Volt-Ampere or apparent power = $V_{RMS} * I_{RMS}$	14.55 VA
Displacement factor of AC power feed	0.99
Power factor of AC current feed	0.99
Total harmonic distortion of the current	6.51%
Total harmonic distortion of the voltage	1.72%

Input Power Curve

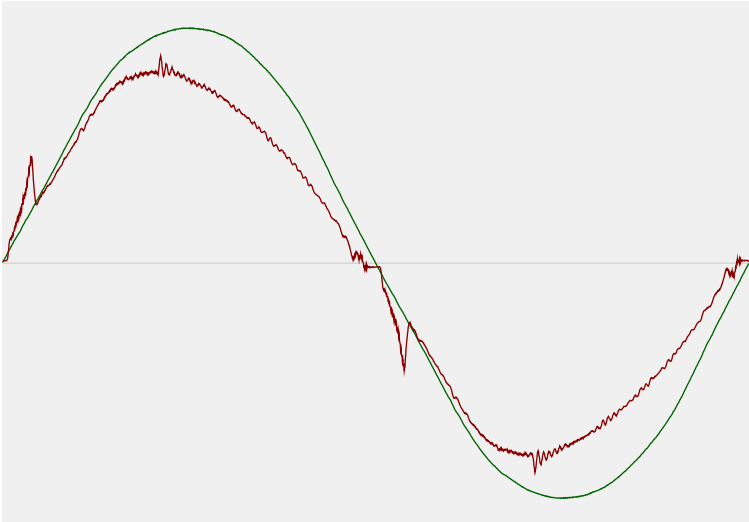

Efficiency

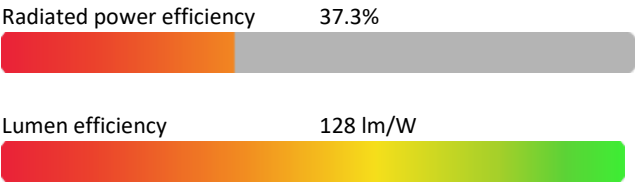

Stabilization Details

Warmup Conditions

Stable period	15 min
Stable change max	2.0%
Minimum time	15 min

Color Temperature Change

CCT start	3465 K
CCT shift	0 K
CCT end	3465 K


Warmup Result

Total warmup time	Not completed
Warmup variation	-0.7%

Output Change

Output start	1841 lm
Output change	-3 lm
Output end	1838 lm

Stabilization Curve

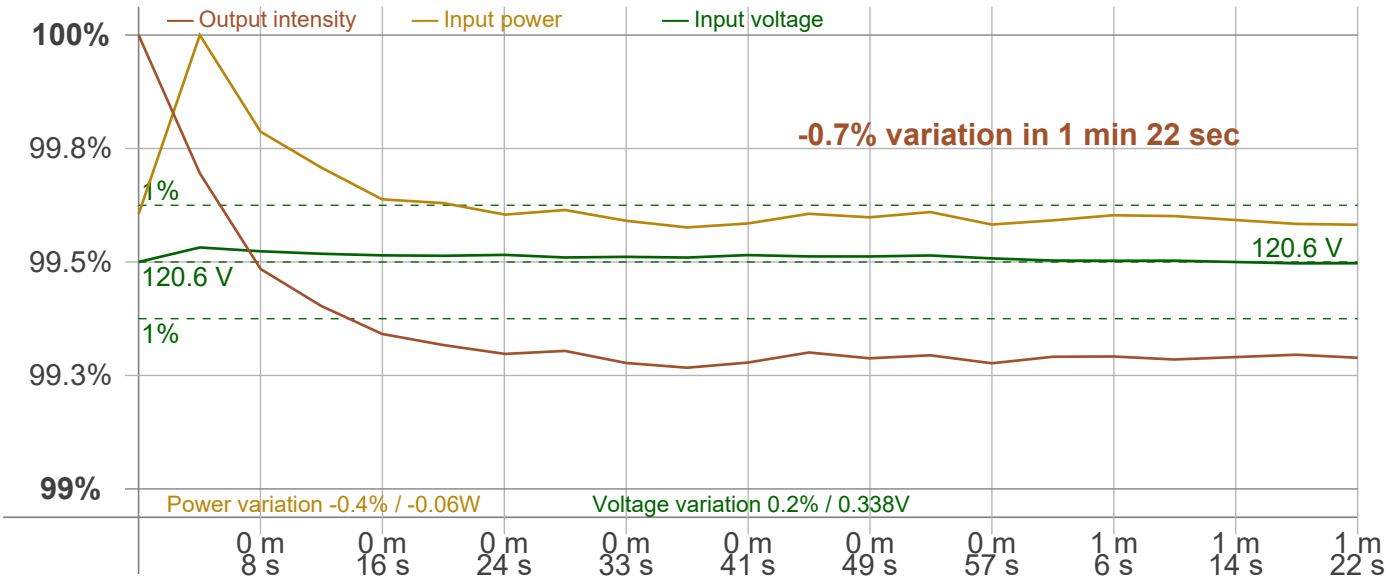

Light Measurement Report


Print date: 1/7/2026
Measurement date and time: 1/2/2026 2:19:14 PM – Measurement no. VFR-260102-0735-MS
Measurement tracking No. and Link: [n/a](#)
Operator:




Flicker /TLA details

Flicker Meter Type	Viso Systems LabFlicker	Measurement time	
Frequency of input power	60 Hz	PstLM	180 sec
Flicker/TLA sample rate	n/a samples/s	All other indices	1,2 sec
Flicker indices according to Illuminating Engineering Society (IES)		Flicker indices according to California Energy Commission (CEC) 2016b	
Flicker frequency	n/a Hz	JA8/10 40 Hz	n/a %
Percent Flicker	n/a %	JA8/10 90 Hz	n/a %
Flicker index	n/a	JA8/10 200 Hz	n/a %
		JA8/10 400 Hz	n/a %
		JA8/10 1000 Hz	n/a %
TLA indices (re IEC TR 61547-1, IEC 61000-3-3 and IEC 61000-4-15)		Flicker indices according to Lighting Research Center (2015)	
PstLM value (F < 80 Hz)	n/a	Perception metric, Assist Mp	n/a
SVM value (80 < F < 2000 Hz)	n/a		

Flicker frame (frame of one flicker period in time domain)

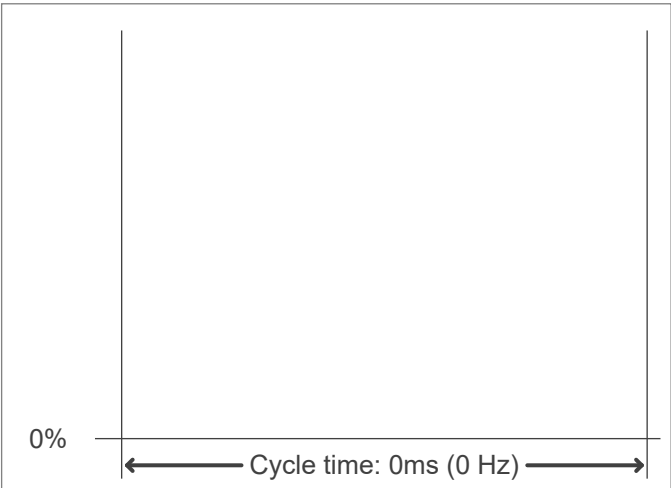

Flicker FFT (flicker curve in frequency domain)

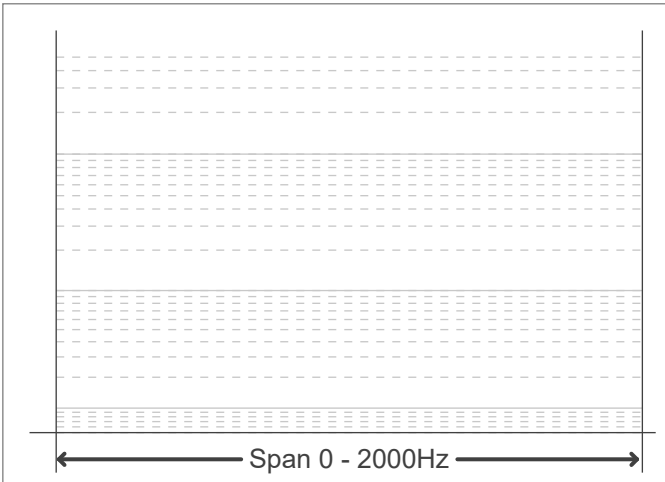

IEEE 1789 Frequency/modulation plot

