FINELITE®



HP-2 Wet Location


A brand of legrand®

HP-2 WL

High Performance 2″ Aperture Wet Location (HP-2 WL) Pendant (**P**), Recessed (**R**), Surface Mount (**SM**), Wall Mount (**WM**), and Mullion Mount (**MUL**) linear LED luminaire listed for wet location, IP65, and IK09. Available in direct distribution, HP-2 WL delivers uniform illumination with a clean linear aesthetic free of visible hardware. Offered in 2′, 3′, 4′, 5′, 6′, 7′, and 8′ section lengths, supporting both standalone and continuous-row configurations.



IK09 IP65 IC Rated

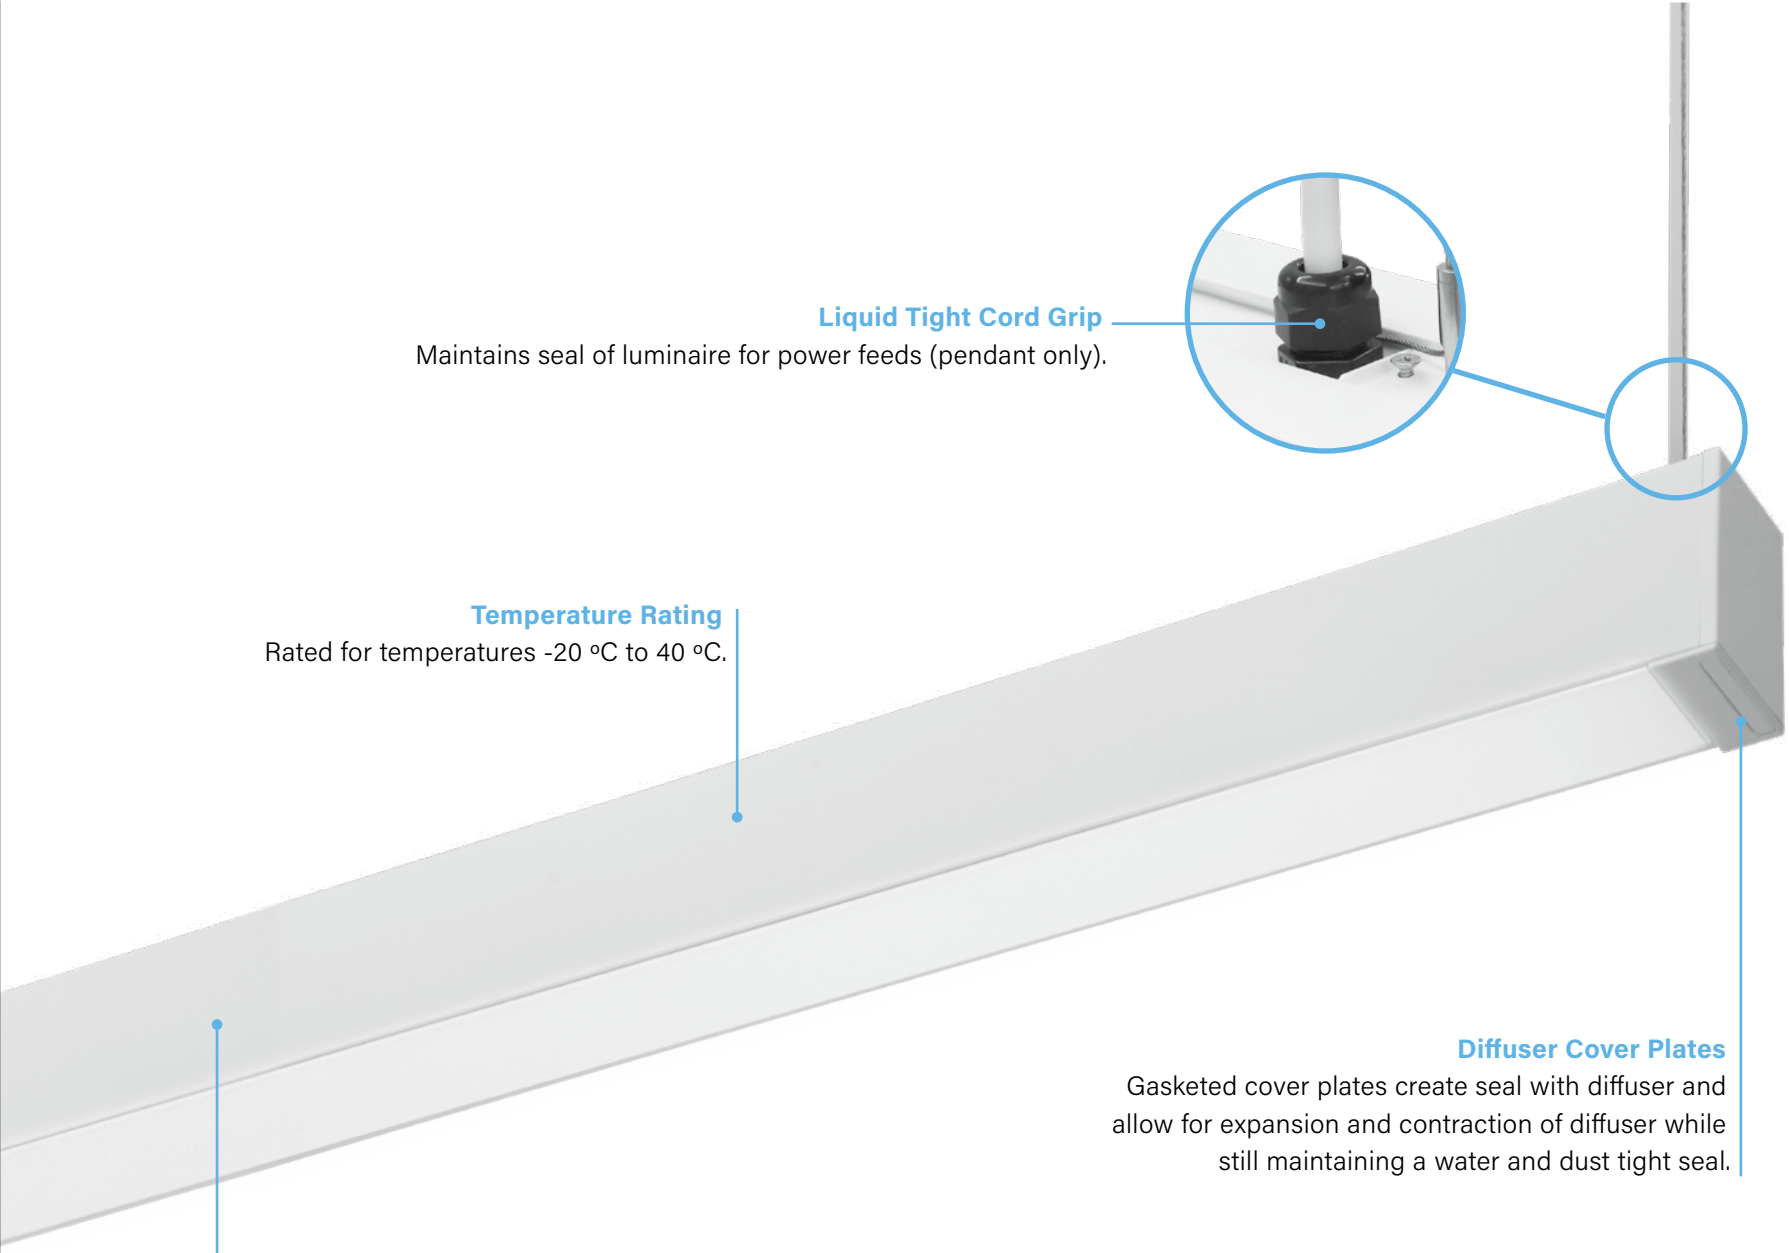

Liquid Tight Cord Grip
Maintains seal of luminaire for power feeds (pendant only).

Temperature Rating
Rated for temperatures -20 ºC to 40 ºC.


Diffuser Cover Plates
Gasketed cover plates create seal with diffuser and allow for expansion and contraction of diffuser while still maintaining a water and dust tight seal.

Durable Double Coat Finish
Extruded aluminum housings are powder coated with two coats to withstand harsh environments.



Rigid Stem option shown. Disclaimer: All images used are for illustrative purposes only.

HP-2 WL

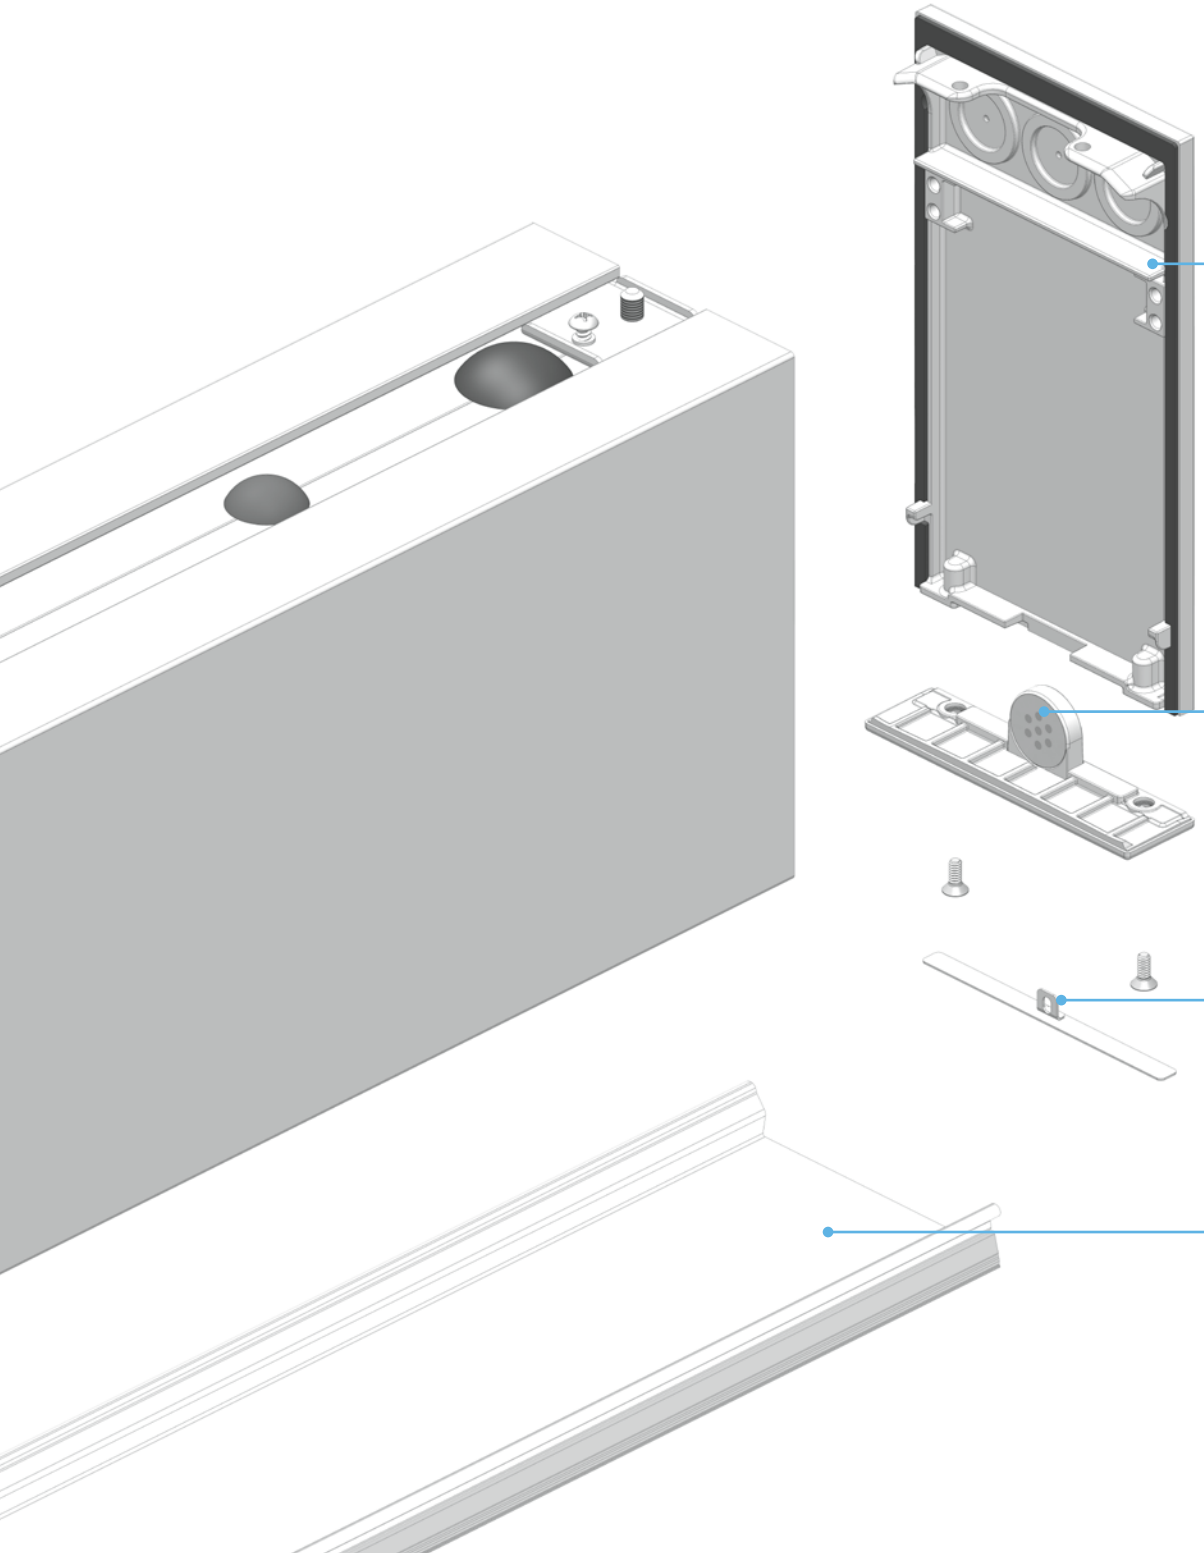

Gasketed Endcaps

Die cast aluminum endcaps with custom fit gaskets are mechanically secured to the body from the inside to eliminate unsightly fastening hardware on the exterior of the luminaire.

Pressure Equalization

Gore® protective vent integrated into cover plate and concealed from view allows air to pass through but prevents water, salt, corrosive liquids and particulates from getting inside.

No Visible Attachment Hardware

Magnetic plate hides fastening hardware but is easily removed to access screws for luminaire maintenance and installation.


Robust Diffusers

Diffusers designed to withstand the outdoor environment with an IK09 impact protection rating. Co-extruded UV stabilized gaskets run the length of the diffusers to prevent water and dust intrusion.

Performance

HP-2 WL

HP2 WL-P-D-4'-V-835
Downlight: Flush Diffuser
Efficacy: 91 lm/W
Total luminaire output: 3206 lumens (802 lm/ft)
35.0 watts (8.8 W/ft)
Peak Candela Value: 1300 @ 0º
CRI: 80 / CCT: 3500K

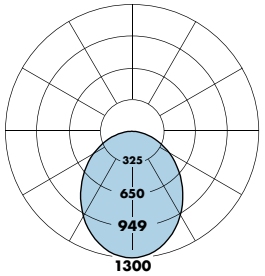

Total Light Output, 3500K, 80 CRI (Lumens) - 4' Luminaire			
S [1]	**B** [1]	**H** [1]	**V** [2]
1359	1999	2621	3206

Light Output, 3500K, 80 CRI (Lumens Per Foot)			
S [1]	**B** [1]	**H** [1]	**V** [2]
340	500	655	802


Power, 3500K (Watts Per Foot)							
↓S [1]		**↓B** [1]		**↓H** [1]		**↓V** [1]	
120V	277V	120V	277V	120V	277V	120V	277V
3.9	4.0	5.4	5.5	4.6	7.5	8.8	9.0

Efficacy, 3500K, 80 CRI (Lumens Per Watt)							
↓S [1]		**↓B** [1]		**↓H** [1]		**↓V** [21]	
120V	277V	120V	277V	120V	277V	120V	277V
87	84	94	91	144	88	91	90


S - Standard Output, B - Boosted Standard Output, H - High Output, V - Very High Output

* Family Correlation based on 4' luminaire 3500K Very High Output (**V**) test – 120V


Cross Sections




HP-2 WL D
Fully Adjustable [1]




HP-2 WL D
Rigid Stem [2]




HP-2 WL VF D




HP-2 WL SF D



HP-2 WL SM D [3]



HP-2 WL WM D



HP-2 WL MM D
(Mullion Mount)


[1] Fully adjustable aircraft cable made of 316 Stainless Steel to withstand corrosion.
[2] 1/2" IPS Rigid Stem available in 12", 18", 24", or 36" overall length.
[3] Available in ceiling and horizontal only.

Lengths

2', 3', 4', 5', 6', 7', and 8' section lengths. Independent and continuous rows available.

For **independent luminaires**, add 1/4" for each endcap to overall length.

Example: 4' = 4'-1/2"



Example: 8' = 8'-1/2"



For **continuous rows**, add 1/4" for each endcap and 1/4" for each joint to overall length.

Example: 24' = 24'-1"







Surface Mount option shown. Disclaimer: All images used are for illustrative purposes only.



Spackle Flange option shown. Disclaimer: All images used are for illustrative purposes only.

FINELITE®

5-year performance-based warranty

Ships in 10 working days for standard orders

Tailored Lighting

Buy American Act Compliance

Finelite, Inc. • 30500 Whipple Road • Union City, CA 94587-1525 • (510) 441-1100 • www.finelite.com © 2026 Finelite, Inc. All rights reserved. CPI0095. V1 11/26

A brand of legrand®