


Product Photometry and ies files are also available online at www.finelite.com.
For layouts or additional photometry, contact your local representative or the factory.



SX2-O: WCB - 1 T8 - 96W
LSI REPORT 19694

EFFICIENCY = 50.9%

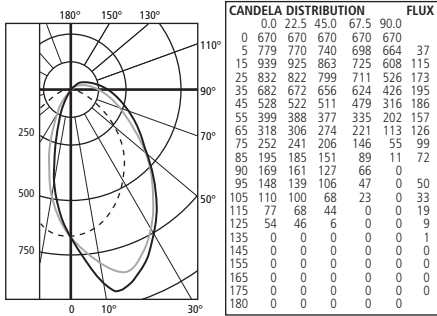

ZONAL LUMEN SUMMARY

ZONE	LUMENS	%LAMP	%FIXT
0-30	462	15.69	30.82
0-40	697	23.65	46.46
0-60	1081	36.65	72.01
0-90	1390	47.12	92.59
40-90	692	23.47	46.12
60-90	308	10.47	20.57
90-180	111	3.77	7.41
0-180	1501	50.89	100.00




LEGEND:
0-deg. - - - - -
45-deg. - - - - -
90-deg. - - - - -



SX2-O: WCB - 1 T5HO - 96W
LSI REPORT 19693

EFFICIENCY = 66%

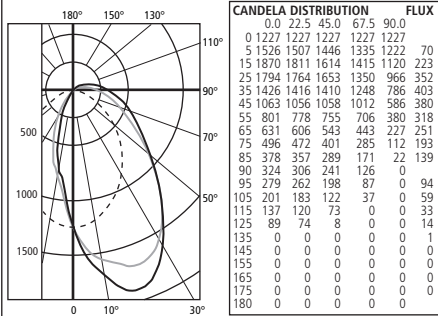

ZONAL LUMEN SUMMARY

ZONE	LUMENS	%LAMP	%FIXT
0-30	898	19.97	30.28
0-40	1381	30.70	46.55
0-60	2161	48.03	72.81
0-90	2768	61.52	93.26
40-90	1386	30.81	46.71
60-90	607	13.49	20.45
90-180	200	4.45	6.74
0-180	2968	65.97	100.00




LEGEND:
0-deg. - - - - -
45-deg. - - - - -
90-deg. - - - - -



SX2-R: WCB - 1 T8 - 96W
LSI REPORT 19787

EFFICIENCY = 47.8%

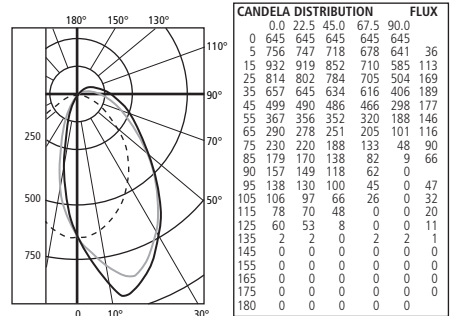

ZONAL LUMEN SUMMARY

ZONE	LUMENS	%LAMP	%FIXT
0-30	437	14.85	31.07
0-40	659	22.35	46.78
0-60	1017	34.48	72.16
0-90	1299	44.04	92.18
40-90	639	21.69	45.40
60-90	282	9.56	20.02
90-180	110	3.74	7.82
0-180	1409	47.78	100.00




LEGEND:
0-deg. - - - - -
45-deg. - - - - -
90-deg. - - - - -



SX2-R: WCB - 1 T5HO - 96W
LSI REPORT 19786

EFFICIENCY = 67.6%

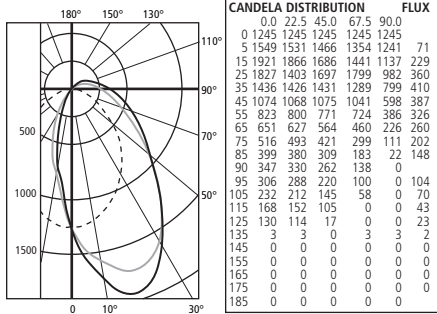

ZONAL LUMEN SUMMARY

ZONE	LUMENS	%LAMP	%FIXT
0-30	900	20.01	29.59
0-40	1380	30.69	45.39
0-60	2167	48.17	71.25
0-90	2800	62.24	92.06
40-90	1419	31.55	46.67
60-90	632	14.07	20.81
90-180	241	5.37	7.94
0-180	3042	67.61	100.00



LEGEND:
0-deg. - - - - -
45-deg. - - - - -
90-deg. - - - - -